


## FUSEHOLDER

- Accepts 5x20 & 6.3x25mm fuses
- IEC257 approved
- IP20 finger protection
- Cable entry 10mm<sup>2</sup>
- Supplied with warth screw & washer
- UL/ CSA approved
- Anti rotation spigot



## FUSED TERMINAL BLOCK

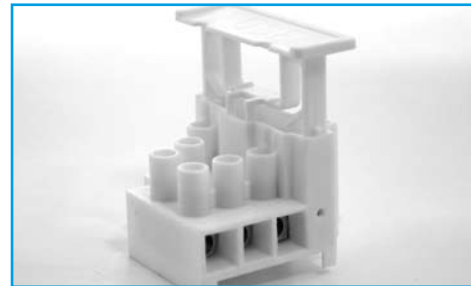

## SPECIFICATION

<b>Rating:</b>	Fuse holder 250Vac, terminal 450Vac
<b>Current rating:</b>	Fuse holder 13Amp, terminal 20Amp
<b>Working temperature:</b>	-20°C to 125°C
<b>Moulding:</b>	UL94V-0 flame retardant PA66
<b>Terminal:</b>	Brass, nickel plated
<b>Fuse clip:</b>	Phosphor bronze
<b>Screws:</b>	M3.5 steel, 6 µ zinc colour passivated and tropicalised
<b>Approvals:</b>	CE
<b>Terminal marking:</b>	L=live/ (earth sign)=Earth/N=neutral

## OUTLINE DRAWING

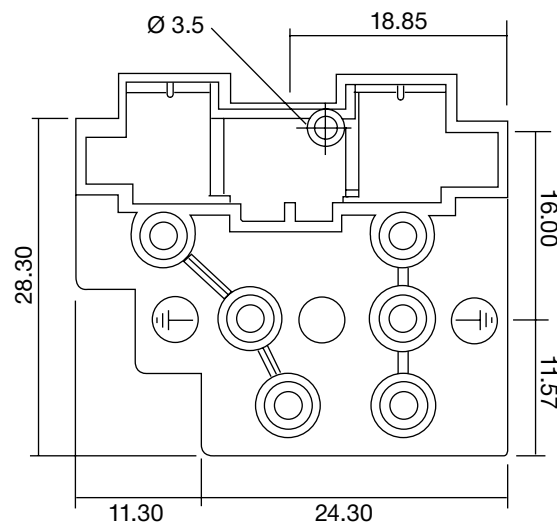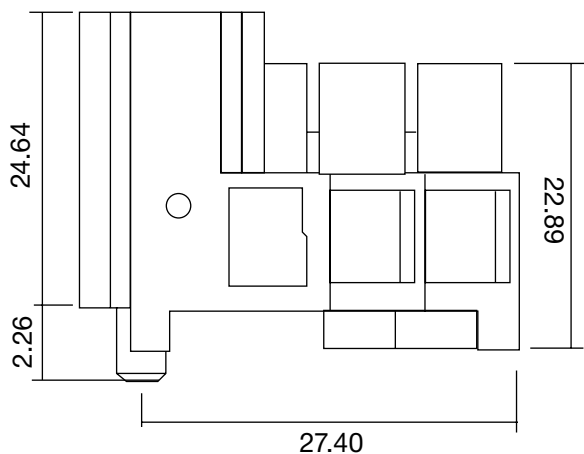

## ORDERING INFORMATION

DBC	FH	1A	/2
Dubilier Connectors	Series	Style	Nº of Ways
	Fuseholder		2 = 2 ways 3 = 3 ways

\* Other Number of ways are available up to 12  
Please consult office for further details