

"High Frequency Ceramic Solutions"

Preliminary

2.45 GHz Balun/Filter Combination

P/N 2450FB39A0150

Detail Specification: 01/06/09

Page 1 of 2


General Specifications

Part Number	2450FB39A0150
Frequency (MHz)	2400 - 2500
Unbalanced Impedance	50 Ω
Balanced Impedance	150 Ω
Insertion Loss	2.5 dB max.
Return Loss	9.5 dB min.
Phase Difference	180° ± 10
Amplitude Difference	1.0 dB max.

Attenuation (dB)	35 min.@ 880~960MHz
	30 min.@ 1710~1910 MHz
	30 min.@ 4800~5000MHz
	25 min.@ 7200~7500MHz
Reel Quantity	3000
Power Capacity	1 watt max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 ~ +35°C, Humidity 45~75%RH, 12 mos. Max


Mechanical Dimensions

	In	mm
L	0.098 ± 0.008	2.50 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.043 ± 0.004	1.10 ± 0.10
a	0.016 ± 0.004	0.40 ± 0.10
b	0.014 ± 0.004	0.35 ± 0.10
c	0.012 +.004/- .008	0.30 +0.1/-0.2
e	0.039 ± 0.004	1.00 ± 0.10
g	0.012 ± 0.004	0.30 ± 0.10
p	0.028 ± 0.004	0.70 ± 0.10

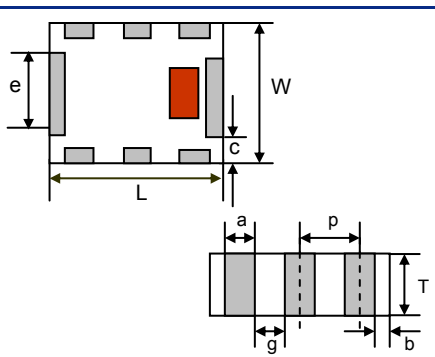



Terminal Configuration

No.	Function
1	NC
2	Unbalanced Port
3	NC or DC Feed
4	Balanced Port
5	NC
6	Balanced Port
7	GND
8	GND



Mounting Considerations

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

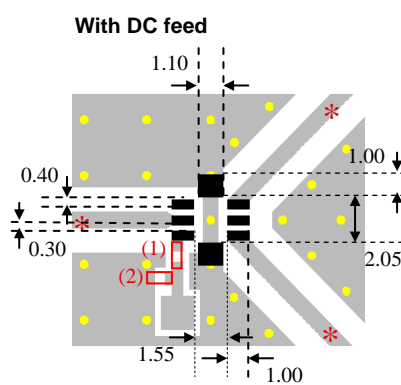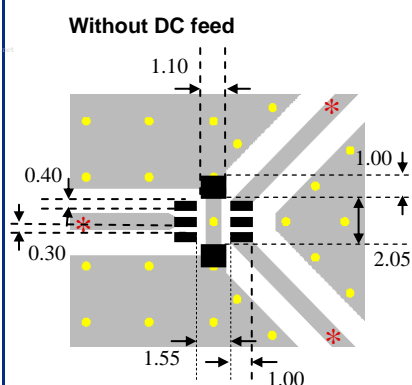

- Solder Resist
- Land
- Through-hole (φ0.3)
- (1) Choke Inductor = 8.2nH
- (2) Decoupling Capacitor = 100pF

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.




www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

Typical Electrical Performance (T=25°C)

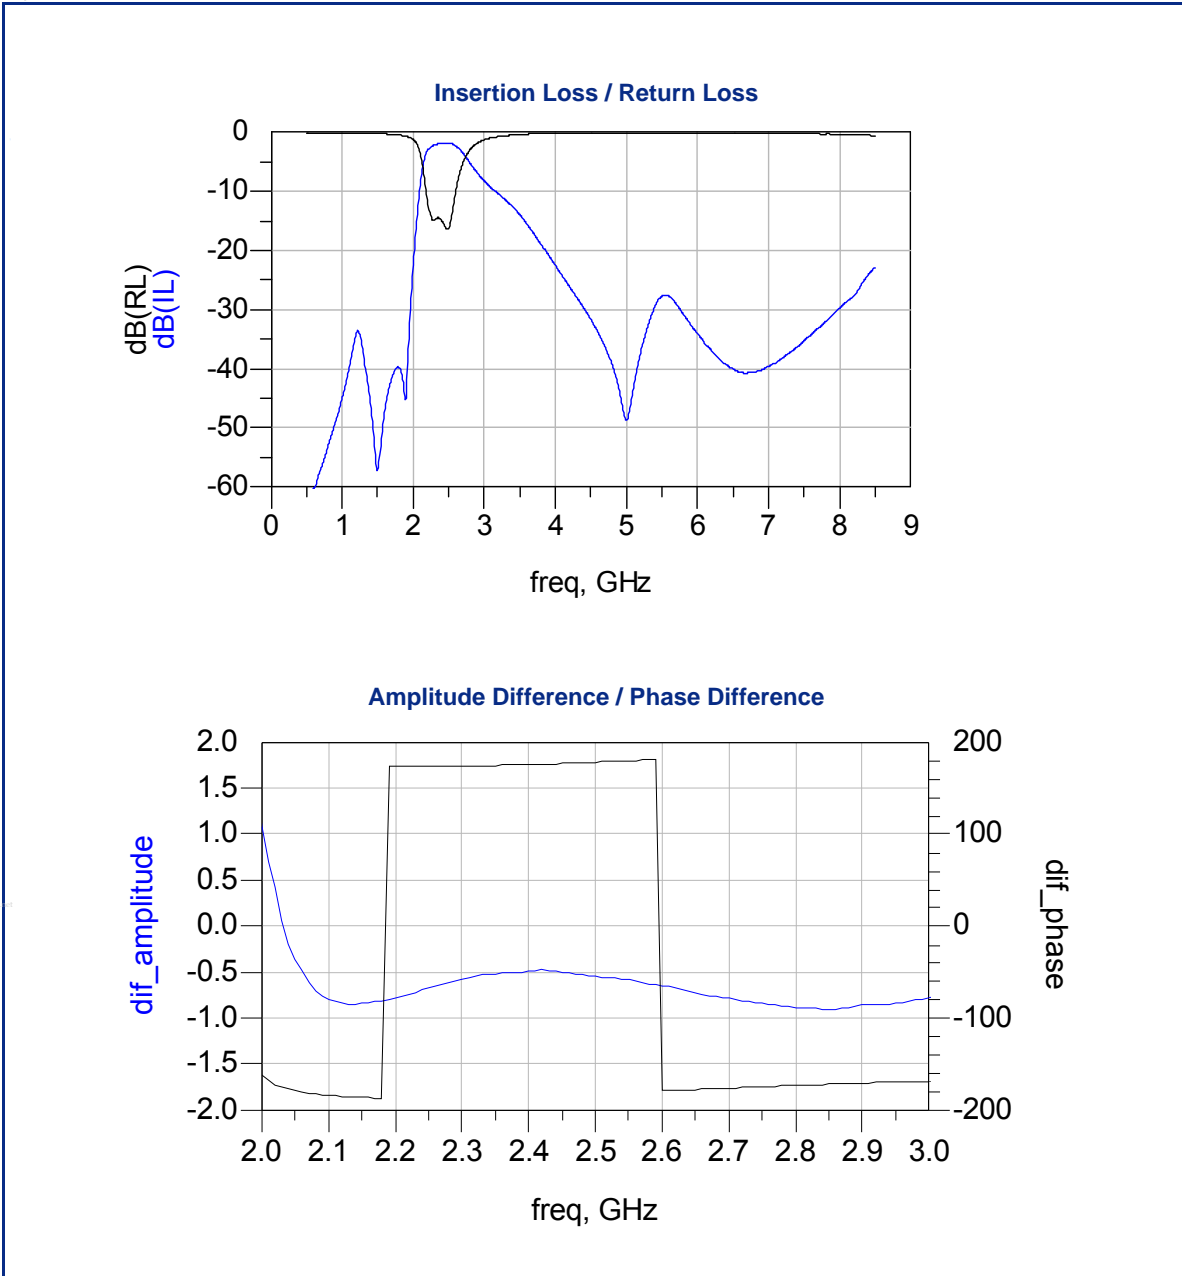

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.