


REV.	CHANGE CONTENT	BY	DATE

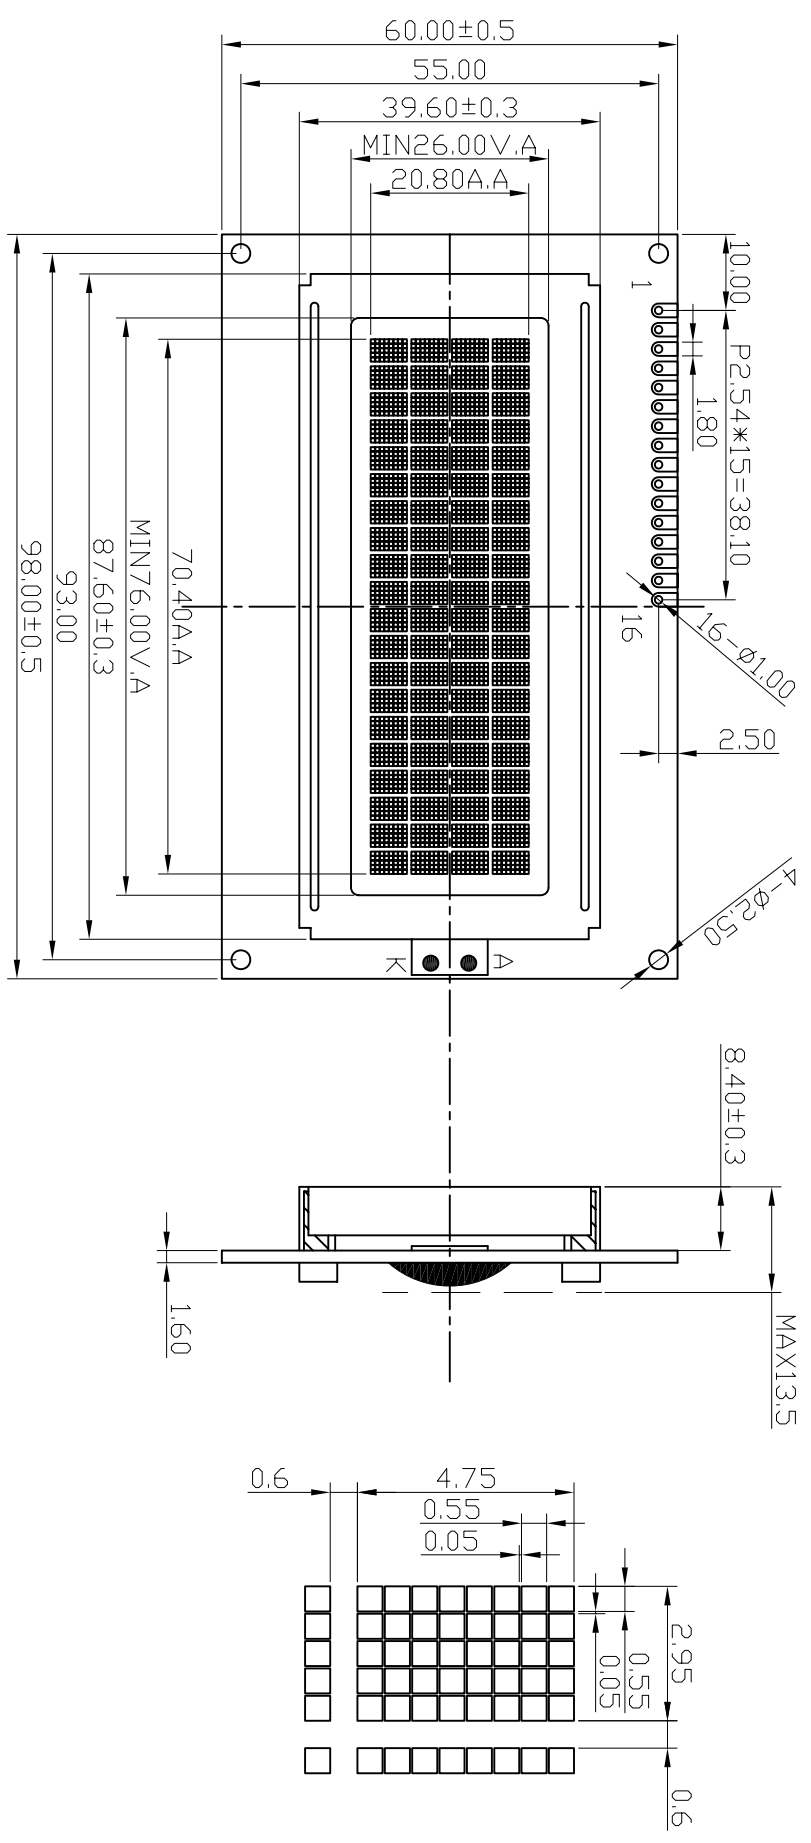

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
 2. DISPLAY MODE: TRANSPARENT
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.5V Vop, 5V VDD
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 6. ST. TEMP.: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
 7. BACKLIGHT: COLOR-Y/G, Vf=4.2±0.15V, If=260mA MIN.80 CD/m²
 8. DRIVER IC: S6A0069, S6A0065

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VSS	VDD	VD	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	LED+(+5V)	LED-(0V)

TOLERANCE		HTD		HTDISPLAY CO., LTD.		DRAWING No. : HC200401C-YF62L-VA	
>0~6	±0.10	DESIGN	ZOJYS	05.09.27	STANDARD	REV. : A	SCALE : -
>6~80	±0.20	CHECKED			TECHNOLOGY	PROJECTION:	UNIT : mm
>80~240	±0.30	APPROVED			Q.A		SHEET : 1/1
>240~400	±0.50						
// 1.0	±0.10						