


SS-Series



SS-12E01-G(B)5-00

BODY: Polyoxymethylene
BASE: Polyamide and Fiberglass
ACTUATOR: Polyoxymethylene
CONTACTS: Silver Plated Copper
TERMINALS: Silver Plated Brass

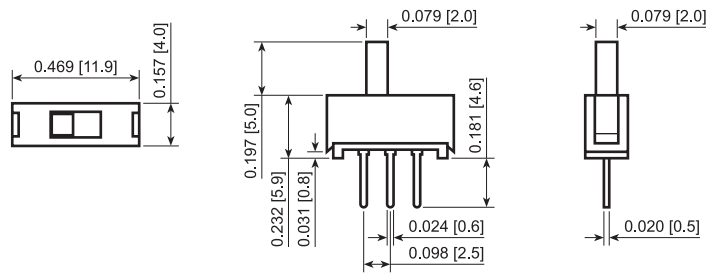



The **SS-Series** slide switches encompass more than 500 different models, of which 5 are shown on this page. These models range from 1 to 10 poles and 2 to 10 positions. Each model can be customized with various actuator styles and lengths. Please contact our sales department for more information.

SPECIFICATIONS:

RATING: 0.5A 50VDC
TEMPERATURE: -30°C to 105°C
ELECTRICAL LIFE: 10,000 Cycles
WITHSTAND VOLTAGE: 500VAC for 1 Minute
INSULATION RESISTANCE: 500MΩ at 500VAC
CONTACT RESISTANCE: 30mΩ at 50VDC



SS-15F01-G(G)8

BODY: Steel
BASE: Penolic Board
ACTUATOR: Polyoxymethylene
CONTACTS: Silver Plated Copper
TERMINALS: Silver Plated Brass

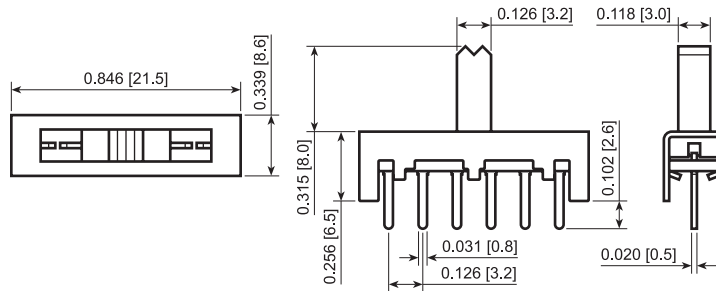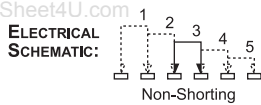



SS-22F06-G5-A

BODY: Steel
BASE: Penolic Board
ACTUATOR: Polyoxymethylene
CONTACTS: Silver Plated Copper
TERMINALS: Gold Plated Brass

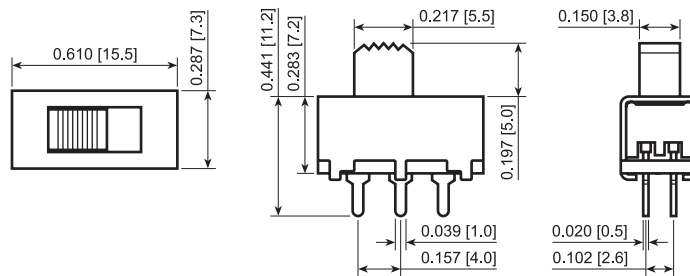






SS-24H04-T14

BODY: Steel
BASE: Penolic Board
ACTUATOR: Aluminum Polyoxymethylene
CONTACTS: Silver Plated Copper
TERMINALS: Silver Plated Brass

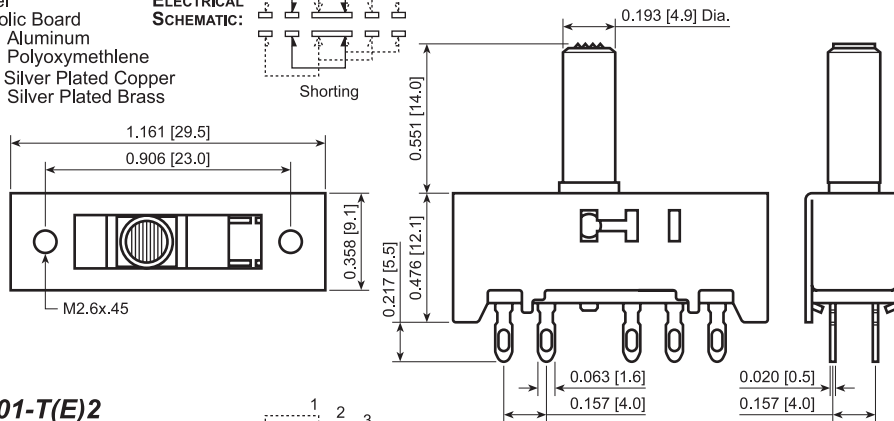

SS-34G01-T(E)2

BODY: Steel
BASE: Penolic Board
ACTUATOR: Polyoxymethylene
CONTACTS: Silver Plated Copper
TERMINALS: Silver Plated Brass

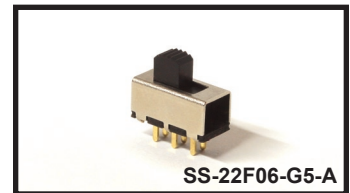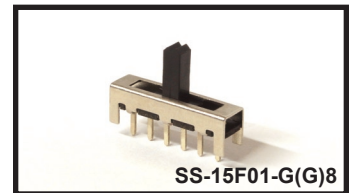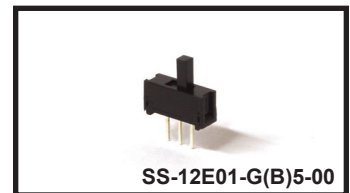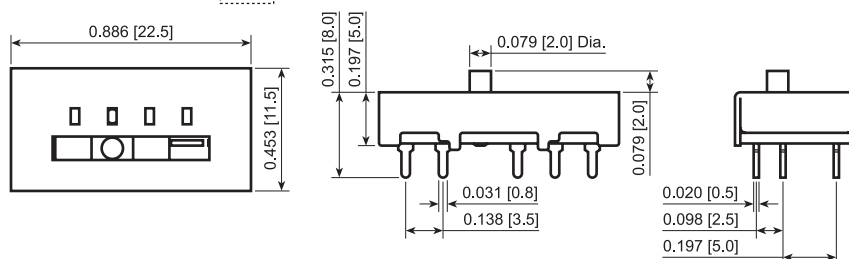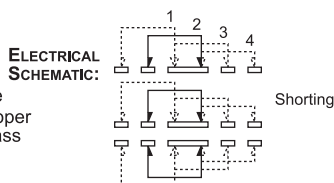

SLIDE