

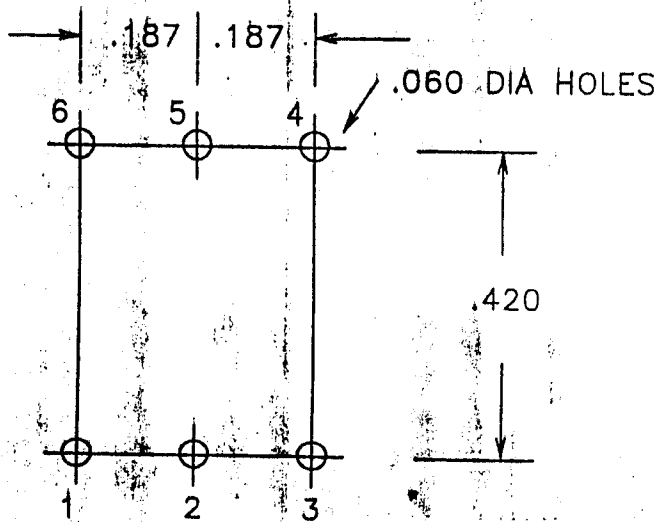
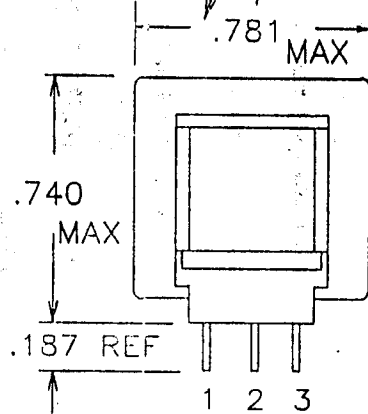


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

TY-145P.DC2

DOT ABOVE #1 PIN  
ON BOBBIN FLANGE

TY-145P TO READ  
TOWARD 1,2,3, SIDE  
ON TOP OF  
CORE.

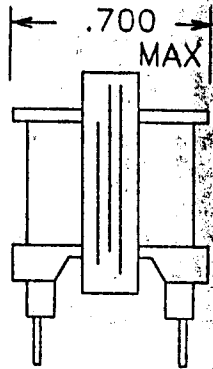

# PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-3 = 44
	4-6 = 58

APPLY = 5V, 200 HZ, 1-3

INDUCTANCE: 1.6 HY, MINIMUM

HIPOT = 1500V PRI TO SEC & CORE  
1500V SEC TO CORE

MagneTek

PART NO. TY-145P

METHOD 1 X 1