

TECHNICAL DESCRIPTION

FEATURES

- 435 - 524 MHz
- LOW LOSS
- HIGH ISOLATION
- EXCELLENT PHASE/AMPLITUDE BALANCE
- SURFACE MOUNT
- TAPE & REEL AVAILABLE

APPLICATIONS

- CDMA 450 BASE STATION POWER AMPLIFIERS
- UHF LAND MOBILE RADIO BASE STATION POWER AMPLIFIERS
- UHF RADAR (400-500 MHz)




The Multi-Mix® QHDZ-2H-0.48G provides a 3 dB 90° coupling with low insertion loss, low VSWR, and high isolation for use in the 435 - 524 MHz range. Accurate phase and amplitude balance make this series ideal for use in IQ networks, power amplifiers, radio transceivers, receiver multicouplers and RF signal distribution and processing equipment.

QHDZ quad hybrids are fusion bonded multilayer stripline devices. The fusion bonding process yields a homogeneous monolithic dielectric structure with reliability, ruggedness, and electrical performance that is superior to conventional adhesive bonding techniques.

GENERAL SPECIFICATIONS

FREQUENCY RANGE MHz		INSERTION LOSS (dB MAX)	AMPLITUDE BALANCE (dB MAX)	PHASE BALANCE
435 - 524		0.25	± 0.2	90 ± 2°
ISOLATION (dB MIN)	VSWR (ALL PORTS)	INPUT POWER (CW @ 1.2:1 OUTPUT VSWR)	RF INTERFACE	OPERATING TEMPERATURE
27	1.12:1	125	Surface Mount	-55° - +95° C

PACKAGE OUTLINE / TAPE & REEL ORIENTATION




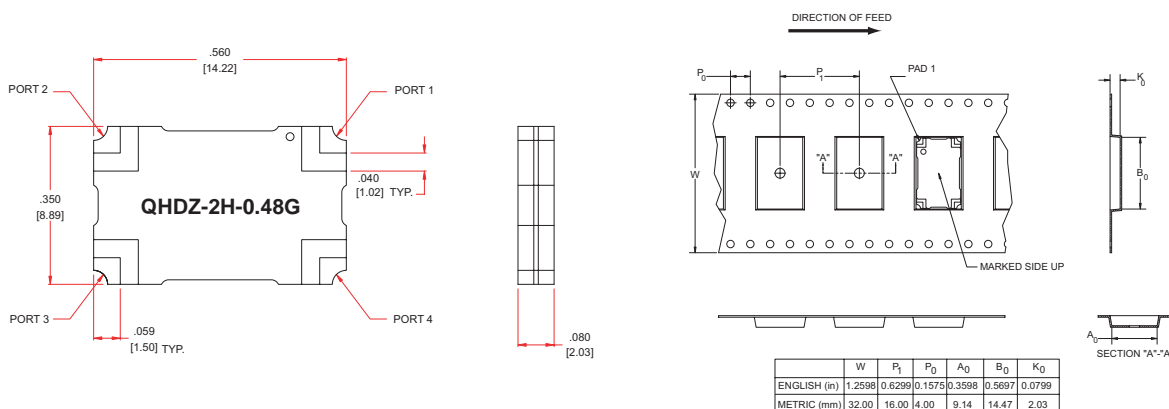


THE MULTI-MIX MICROTECHNOLOGY® GROUP IS ISO 9001:2000 REGISTERED




U.S. Patent 6,099,677 and other Patents Pending.

TYPICAL PERFORMANCE

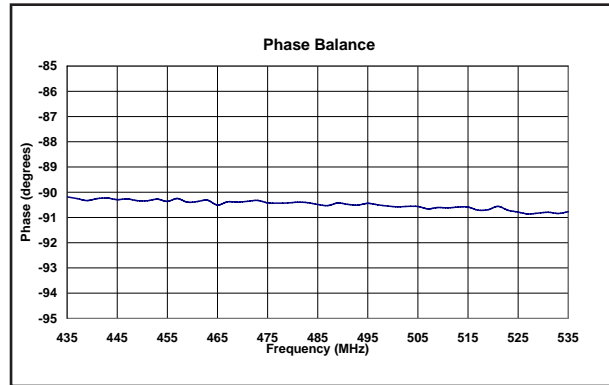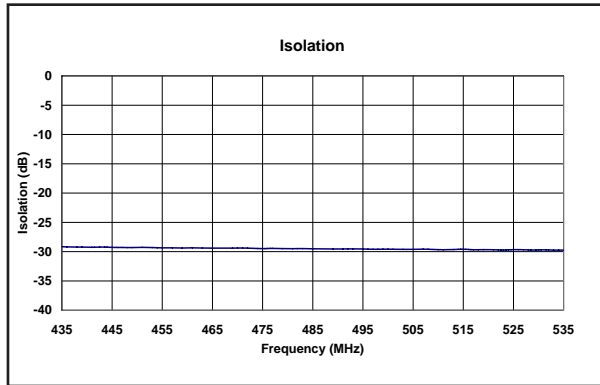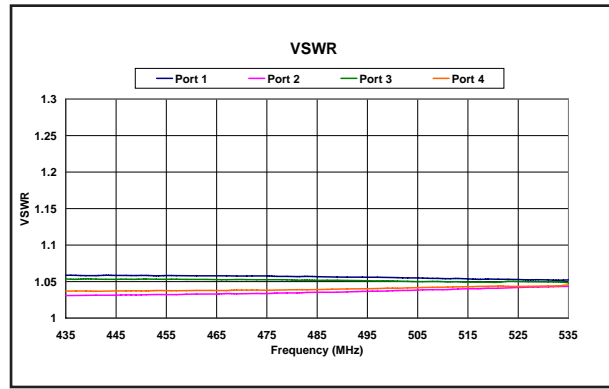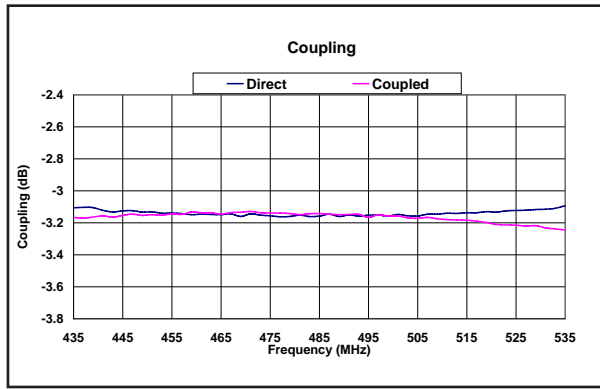

MOUNTING CONFIGURATION

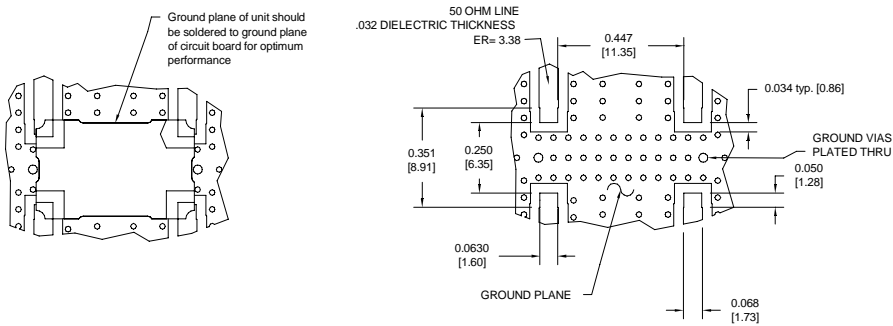

TRUTH TABLE

	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input