

NYLON TUBULAR SPACERS

Nylon Spacers for Standard Screw Sizes

- Screw Spacers give users an extremely wide selection of tubular spacers for PCB support in almost any elevation
- Six basic ID/OD combinations with heights ranging from 1/16" (1.6mm) through 1.0" (25.4mm), are available from factory stock or within two weeks
- Such a broad selection permits the user to choose the most suitable sizes for strength, elevation and ease of assembly

Material Specifications:

Natural Nylon, per ASTM D4066 PA225, UL Rated 94V-2

Oxygen Rating Index: Over 23%

Standard Drawing Tolerances:



(unless otherwise indicated)

O.D. $\pm .005$ (.13)

I.D. $\pm .005$ (.13)

"H" Dim: 1/16-1/2 (1.6-12.7) is $\pm .005$ (.13)

"H" Dim: 9/16-1.0 (14.3-25.4) is $\pm .010$ (.25)

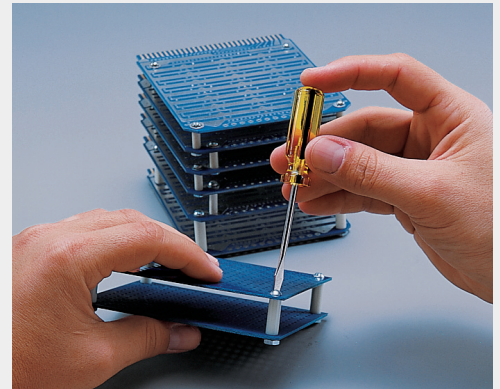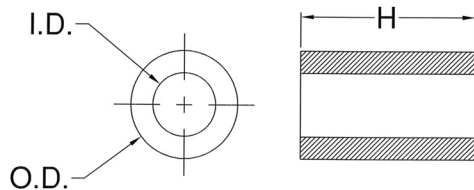

99XX Series

Color: Natural

Series	Screw Size	I.D.	O.D.	"H" DIM.	Dash No.	Price Code
9913	#2	.091 (2.3)	.187 (4.7)	1/16 (1.6)	-062	U
				1/8 (3.2)	-125	U
				3/16 (4.8)	-187	U
9910	#2	.091 (2.3)	.250 (6.4)	1/4 (6.4)	-250	U
				5/16 (7.9)	-312	U
9908	#4	.125 (3.2)	.187 (4.7)	3/8 (9.5)	-375	V
				7/16 (11.1)	-437	V
				1/2 (12.7)	-500	V
9911	#4	.125 (3.2)	.250 (6.4)	9/16 (14.3)	-562	V
				5/8 (15.9)	-625	W
				3/4 (19.1)	-750	W
9905	#6	.147 (3.7)	.250 (6.4)	13/16 (20.6)	-812	X
				7/8 (22.2)	-875	X
9912	#8	.171 (4.3)	.250 (6.4)	15/16 (23.8)	-937	X
				1.0 (25.4)	-1000	X

Examples:

9913-250 is for a #2 Screw, O.D. is .187 (4.7)
Length is 1/4 (6.4), price code U.

9910-125 is for a #2 Screw, O.D. is .250 (6.4)
Length is 1/8 (3.2), price code U.