
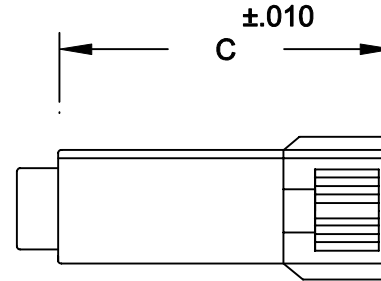
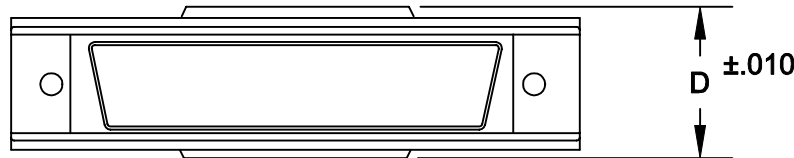


DESCRIPTION: .050 Ribbon Die Cast w/Thumbscrews

	A	B	C	D
68	2.28	2.536	1.378	.512
	57.91	64.40	35.00	13.00

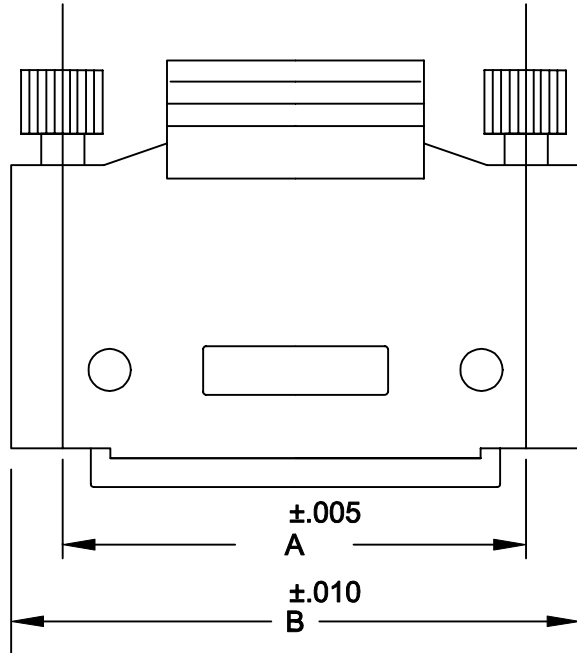

Materials:

Connector:

Insulator: High Temp plastic

U.L. rated 94V-0

Contacts: Copper Alloy

Shell: Steel with nickel plating

Backshell: Zinc Alloy

Electricals:

Contact current rating: 1.0 Amp

Dielectric Withstanding Voltage: AC 500 V r.m.s.

Insulation Resistance: 500 MEGOHMS Min.

Contact Resistance: 25 MILLIOHMS Max.

Operating Temperature: -55°C to + 105°C

Kit Includes:

- (1) IDC Male Connector
- (2) Metal Shell Halves
- (2) Thumbscrews
- (1) Strain Relief Clamp
- (2) Strain Relief Screws
- (2) Housing Screws

991-068-030-121

SERIES _____

POSITIONS _____

068 _____

MATERIAL _____


030 = ZINC _____

COLOR: _____

12 = NICKEL OVER COPPER _____

PUT-UPS _____

1 = KIT _____

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 9-24-98
			CHECKED:	DATE:
NorComp		SCALE:	SHEET 1 OF 1	REV 1
		DWG NO. 991-068-030-121		