

- Eight Standard Circuits
- For AC or DC Variable Voltage Output Up To 15KW

Modules come in eight standard circuits and are designed to control AC or DC variable voltage output up to 15KW. The package comes with standard .250 quick-connect terminals. All models have 2500 Vrms isolation and are UL recognized (file no. E72445). Optional isolation barriers are available.

Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

www.DataSheet4U.com



### PART NUMBER IDENTIFICATION

| Series Type    | Current       | Circuit Type             | AC Line Voltage | Options                       | Case Style                 |
|----------------|---------------|--------------------------|-----------------|-------------------------------|----------------------------|
| B-Case style   | 5 - 25 Amps   | 1 - 8                    | 1 - 120 Vac     | F - Free Wheeling Diode       | -2T (Standard)             |
| (Ceramic Base) | 6 - 42.5 Amps | (see schematic diagrams) | 2 - 240 Vac     | (Circuits 1 & 2 Only)         | -2 With Isolation Barriers |
|                |               |                          | 3 - 280 Vac     | SE - External Suppressor      |                            |
|                |               |                          | 4 - 480 Vac     | (-2T Only, Circuits 1-6 Only) |                            |

Example: B512FSE-2T

### MECHANICAL DIMENSIONS

All dimensions are in inches (millimeters)

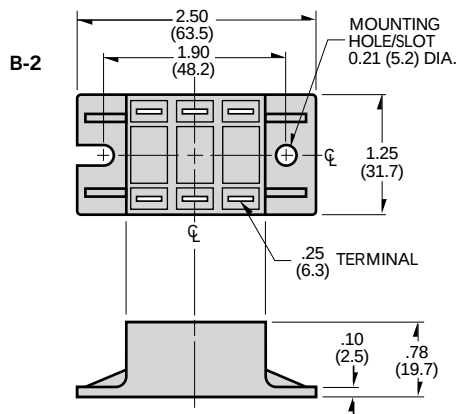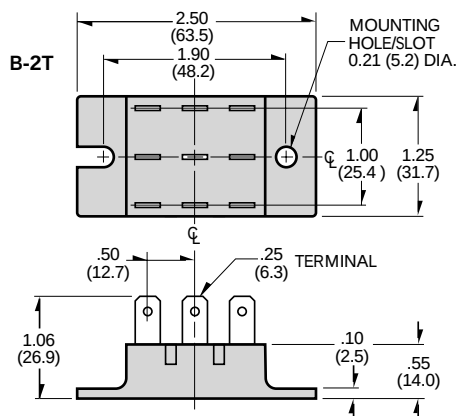

| ELECTRICAL SPECIFICATIONS |                                                                           | MODEL NO. | B5                                                                                            | B6                  |
|---------------------------|---------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------|---------------------|
| SYMBOL                    | SPECIFICATION                                                             |           | RATINGS                                                                                       |                     |
| $I_D$                     | Maximum DC Output Current ( $T_c = 85^\circ\text{C}$ )                    |           | 25A                                                                                           | 42.5A               |
| $V_F$                     | Maximum Voltage Drop @ Amps Peak                                          |           | 1.65V @ 25A                                                                                   | 1.6V @ 42.5A        |
| $T_J$                     | Operating Junction Temperature Range                                      |           | -40°C to +125°C                                                                               |                     |
| $di/dt$                   | Critical Rate of Rise of On-State Current @ $T_J=125^\circ\text{C}$       |           | 100A/ $\mu\text{s}$                                                                           | 100A/ $\mu\text{s}$ |
| $dv/dt$                   | Critical Rate of Rise of Off-State Voltage [V/ $\mu\text{s}$ ]            |           | 500V/ $\mu\text{s}$                                                                           | 500V/ $\mu\text{s}$ |
| $V_{RMS}$                 | AC Line Input Voltage<br>(Repetitive Peak Reverse Voltage)                |           | 120 (400 $V_{RRM}$ )<br>240 (600 $V_{RRM}$ )<br>280 (800 $V_{RRM}$ )<br>480 (1200 $V_{RRM}$ ) |                     |
| $I_{TSM}$                 | Maximum Non-Repetitive Surge Current<br>( $1/2$ Cycle, 60Hz)              |           | 250A                                                                                          | 600A                |
| $I^2T$                    | Maximum $I^2T$ for Fusing ( $t=8.3\text{ms}$ ) [ $\text{A}^2\text{sec}$ ] |           | 260                                                                                           | 1500                |
| $I_{GT}$                  | Maximum Required Gate Current to Trigger @ 25°C                           |           | 60mA                                                                                          | 80mA                |
| $V_{GT}$                  | Maximum Required Gate Voltage to Trigger @ 25°C                           |           | 2.5V                                                                                          | 3.0V                |
| $P_{G(AV)}$               | Average Gate Power                                                        |           | 0.5W                                                                                          | 0.5W                |
| $V_{GM}$                  | Maximum Peak Gate Voltage (Reverse)                                       |           | 5.0V                                                                                          | 5.0V                |
| $R_{\theta JC}$           | Maximum Thermal Resistance Junction to Ceramic Base per Chip              |           | 0.9°C/W                                                                                       | 0.7°C/W             |
| $V_{ISOL}$                | Isolation Voltage                                                         |           | 2500 $V_{RMS}$                                                                                | 2500 $V_{RMS}$      |

### MECHANICAL SPECIFICATIONS

Weight: (typical)

1.5 oz. (42.5g)

© 2003 CRYDOM CORP Specifications subject to change without notice.


- Eight Standard Circuits
- For AC orDC Variable Voltage Output Up To 15KW

### PART NUMBER IDENTIFICATION

| Series Type                    | Current                      | Circuit Type                      | AC Line Voltage                                          | Options                                                                                                       | Case Style                                   |
|--------------------------------|------------------------------|-----------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| B-Case style<br>(Ceramic Base) | 5 - 25 Amps<br>6 - 42.5 Amps | 1 - 8<br>(see schematic diagrams) | 1 - 120 Vac<br>2 - 240 Vac<br>3 - 280 Vac<br>4 - 480 Vac | F - Free Wheeling Diode<br>(Circuits 1 & 2 Only)<br>SE - External Suppressor<br>(-2T Only, Circuits 1-6 Only) | -2T (Standard)<br>-2 With Isolation Barriers |

Example: B512FSE-2T

### SERIES B-2T, B-2 CIRCUITS

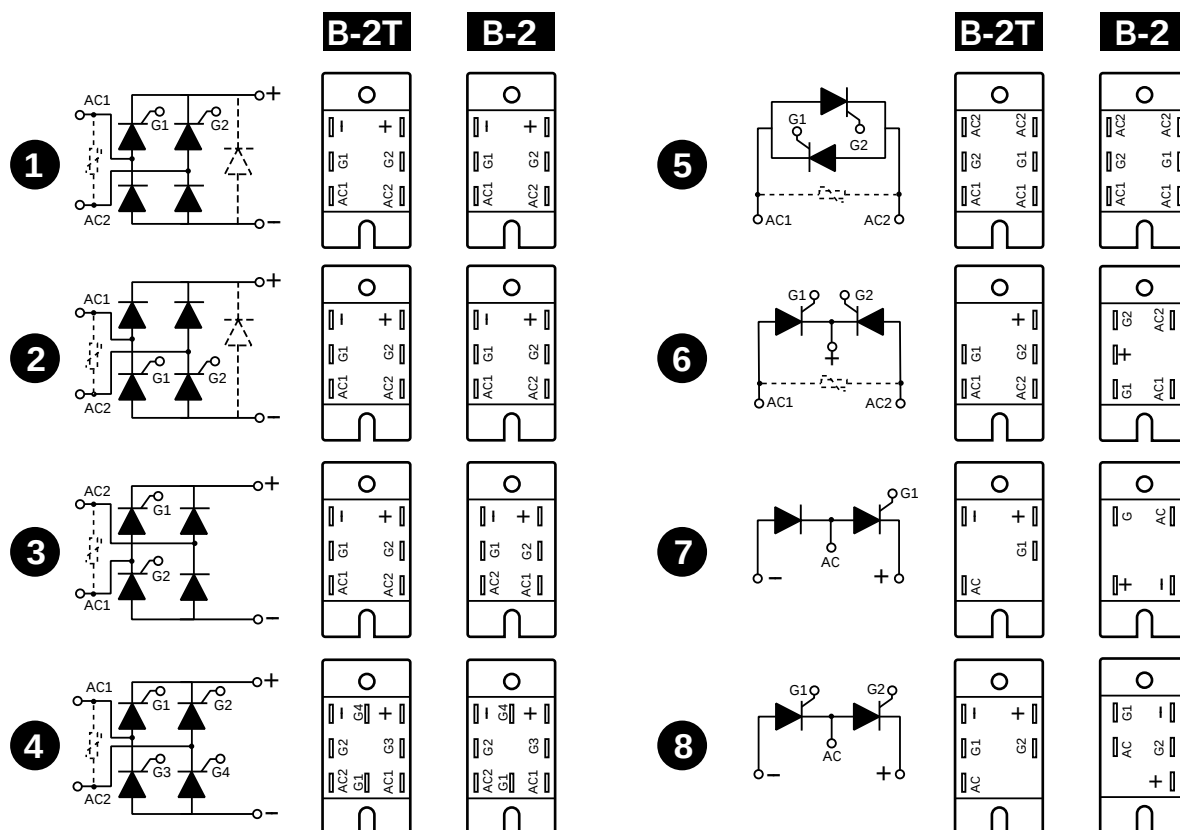

© 2003 CRYDOM CORP Specifications subject to change without notice.

### APPROVALS

UL E72445