



Why LEDs? Datasheets Order / RFQ Reps / Dists Media About Us Catalogs/Lit. Samples Site Map Survey

Home Datasheet Home Miniature Based Medium Based Panel PCB Discrete SMT Custom&RGB SafetyLED LED Specs [SEARCH]

Snap-In Panel Mount LED Lamps

5/32in. (4.0mm), 3/16in. (4.8mm), 1/4in. (6.4mm)

[click here to access pdf file of this page](#)

Snap-In and Bolt-On Panel Mount LED Lamps Pages:

[5/32-1/4in. Snap-In] [5/16in. Snap-In] [1/4 - 5/16in. Bolt-On] [1/2in. 1-chip Snap-In] [1/2in. multi-chip Snap-In]


Features

- Panel Mounting Diameters from 5/32" (4.0mm) to 5/16" (8.0mm)
- Long Life 100,000+ hrs (10 years)
- Solid-State, High Shock / Vibration Resistant
- Maintenance Free, Easy Installation
- Low Power Consumption, High Intensity
- Diffused or Clear Lens
- Choice of High-Efficiency or Sunlight-Visible Super Intensity
- Built-in Current Limiting Resistor
- 3-Year Warranty

Custom Options (for qualified applications)


- Special Voltages
- Special Wire Lead Lengths
- Bicolors, Tricolors, RGB, IR
- Flashing / Blinking
- High-Power Infrareads 850nm / 880nm / 940nm

5/32" (4.0mm) Snap-In Panel Mount LEDs

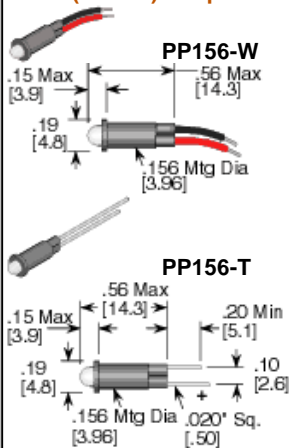

Series	PP156	CWR3K	-	5V	-	W6	Options
							T = Terminal Type W6 = 6' Wire Leads
	LED/Lens Type & Color			Std. Operating Voltage			
	Water Clear Lens (Super Intensity)			Diffused Lens (Std Intensity)			DC
	CWR3K = SP Red	●		TR6 = UL Red	●		2Vf
	CWO3K = SP Orange	●		TR4/5 = HE Red	●		3.5Vf
	CWY3K = SP Yellow	●		TO4/5 = Orange	●		5/6V
	CW900 = C. White	○		TY4/5 = Yellow	●		12/14V
	CWG1K = UL. Green	●		TG4/5 = HE Green	●		24V
	CWAG6K = A. Green	●		TPG4/5 = P.Green	●		28V
	CWB1K = SP. Blue	●		TWRG4 = BiColor Red/Green	●		
	CIR881 = 880nm IR	●		TWYG4 = BiColorYel/Green	●		


3/16" (4.8mm) Panel Mount LEDs with Mounting Clip

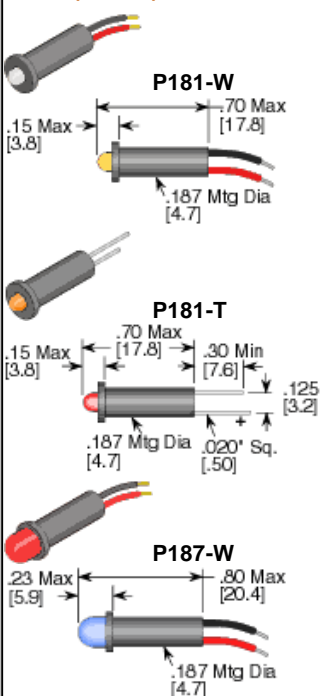

Series	P181	CWR3K	-	5V	-	W6	Options
	P181 = 3mm P187 = 5mm						T = Terminal Type W6 = 6' Wire Leads
	LED/Lens Type & Color			Std. Operating Voltage			
	Water Clear Lens (Super Intensity)			Diffused Lens (Std Intensity)			DC
	CWR3K = SP Red	●		TR6 = UL Red	●		2Vf
	CWO3K = SP Orange	●		TR4/5 = HE Red	●		3.5Vf
	CWY3K = SP Yellow	●		TO4/5 = Orange	●		5/6V
	CW1K = C. White	○		TY4/5 = Yellow	●		12/14V
	CWG1K = UL. Green	●		TG4/5 = HE Green	●		24V
	CWAG6K = A. Green	●		TPG4/5 = P.Green	●		28V
	CWB1K = SP. Blue	●		TWRG4 = BiColor Red/Green	●		
	CIR881 = 880nm IR	●		TWYG4 = BiColorYel/Green	●		

Mounting Clip/Washer

Part No. MC187/MW187



1/4" (6.4mm) Snap-In Panel Mount LEDs

PPS251-W
 .16 Max [4.1] | .72 Max [18.3] | .30 Min [7.7] | .28 [7.2] | .125 [3.2] | .250 Mtg Dia [6.35] | .020" Sq. [.50]

PPS251-T
 .16 Max [4.1] | .72 Max [18.3] | .28 [7.2] | .250 Mtg Dia [6.35]

Series - PPS251 CWR3K - 5V - W6

LED/Lens Type & Color

Water Clear Lens (Super Intensity)	Diffused Lens (Std Intensity)	Std. Operating Voltage
CWR3K = SP Red ●	TR6 = UL Red ●	DC
CWO3K = SP Orange ●	TR4/5 = HE Red ●	2Vf
CWY3K = SP Yellow ●	TO4/5 = Orange ●	3.5Vf
CW1K = C. White ○	TY4/5 = Yellow ●	5/6V
CWG1K = UL Green ●	TG4/5 = HE Green ●	12/14V
CWAG6K = A. Green ●	TPG4/5 = P. Green ●	24V
CWB1K = SP. Blue ●	TWRG4 = BiColor Red/Green ●	28V
CIR881 = 880nm IR ●	TWYG4 = BiColor Yel/Green ●	

Options
 T = Terminal Type
 W6 = 6" Wire Leads

Notes: Super-Intensity Diffused LEDs Available for Special Applications



23105 Kashiwa Ct, Torrance, CA 90505 - PH: (800) 579-4875/(310) 534-1505 - FAX: (310) 534-1424
 © Copyright 1997-2001 LEDtronics, Inc. All Rights Reserved - Contact Webmaster@ledtronics.com