

AF-128160A


• 128x160 dots 1/160 Duty

FEATURE

1. Construction : LCD panel, Blue-green EL backlight and COF technology.
2. Display type : FSTN, Transmissive, Positive, 6 o'clock view.
3. Controller : UL TRACH UC1611
4. Interface for 8080 or 68000 series family MPU, select by BM0, BM1 setting.
5. Extend temperature type.

液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

BLOCK DIAGRAM & POWER SUPPLY

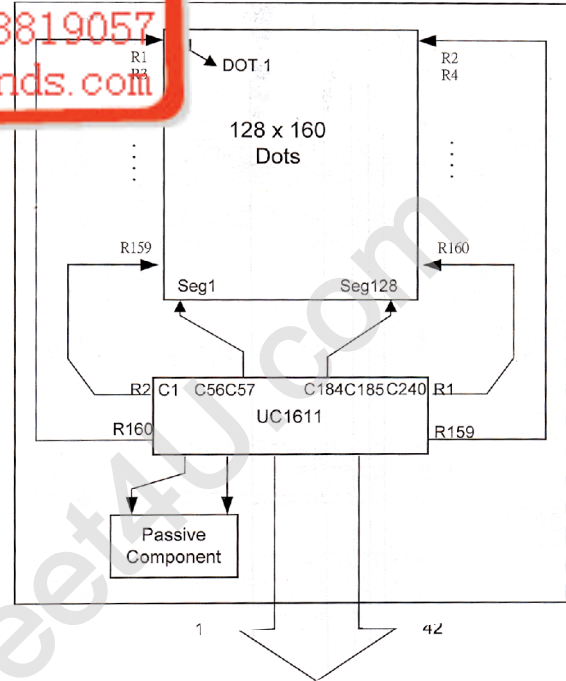

ELECTRICAL CHARACTERISTICS

| Parameter | Symbol | Condition | Typ. Value | Unit. |
|----------------------|--------|-----------|------------|-------|
| LCD Driving Voltage | VLCD | 25°C | 14.3 | V |
| Logic Supply Current | IDD | VDD=2.8V | 2.1 | mA |

INTERFACE

| | | | | | | | | | |
|----|-----|-----|-----|-----|-----|-----|----|-----|-----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| NC | VDD | VSS | BM0 | BM1 | WR1 | WR0 | CD | CS1 | RST |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | VSS | NC |

