




## G421SD

**SURFACE MOUNT, SCHOTTKY BARRIER DIODE  
VOLTAGE 40V, CURRENT 0.1A**

### Description

The G421SD is designed for low power rectification.

### Package Dimensions

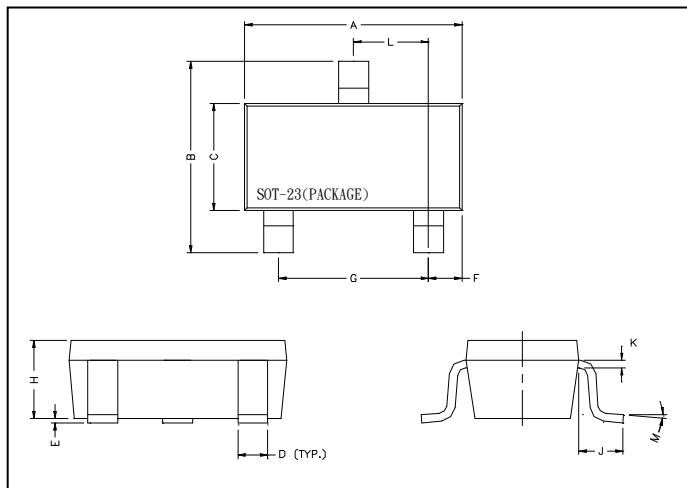

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.10	G	1.90	REF.
B	2.40	2.80	H	1.00	1.30
C	1.40	1.60	K	0.10	0.20
D	0.35	0.50	J	0.40	-
E	0	0.10	L	0.85	1.15
F	0.45	0.55	M	0°	10°





### Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	T <sub>j</sub>	+125	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +125	°C
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	40	V
Maximum RMS Voltage	V <sub>RPS</sub>	28	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	V
Peak Forward Surge Current at 8.3mSec single half sine-wave	I <sub>FSM</sub>	1.0	A
Typical Junction Capacitance between Terminal	C <sub>J</sub>	6.0	pF
Maximum Average Forward Rectified Current	I <sub>o</sub>	0.1	A
Total Power Dissipation	PD	225	mW

### Characteristics at Ta = 25°C

Characteristics	Symbol	Typ.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V <sub>F(1)</sub>	0.55	V	I <sub>F(1)</sub> = 100mA
Maximum Instantaneous Forward Voltage	V <sub>F(2)</sub>	0.34	V	I <sub>F(2)</sub> = 10mA
Maximum Average Reverse Current	I <sub>R</sub>	30	uA	V <sub>R</sub> = 10V

## Characteristics Curve

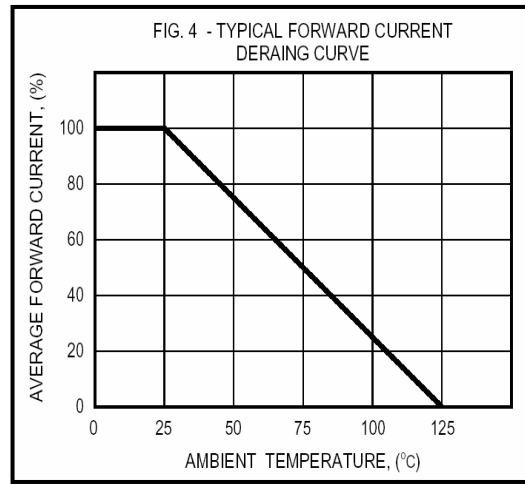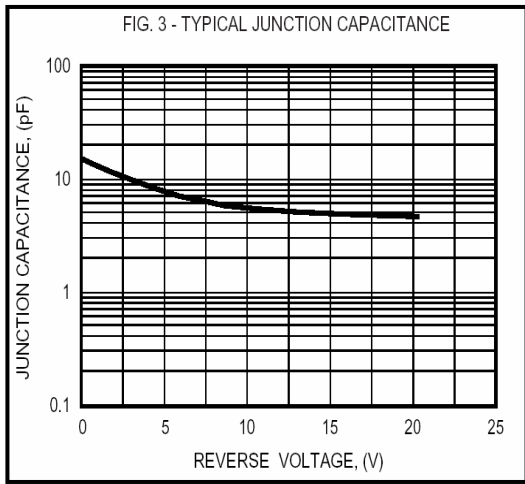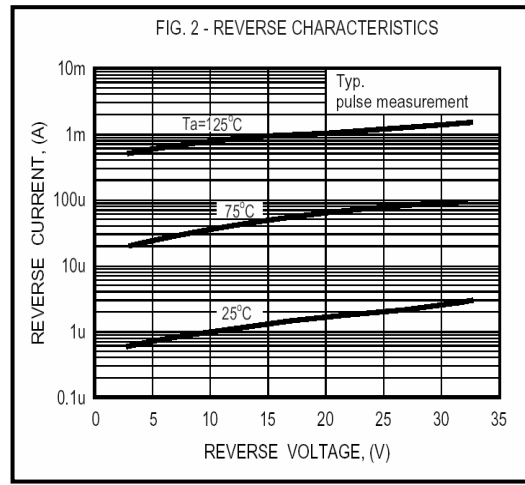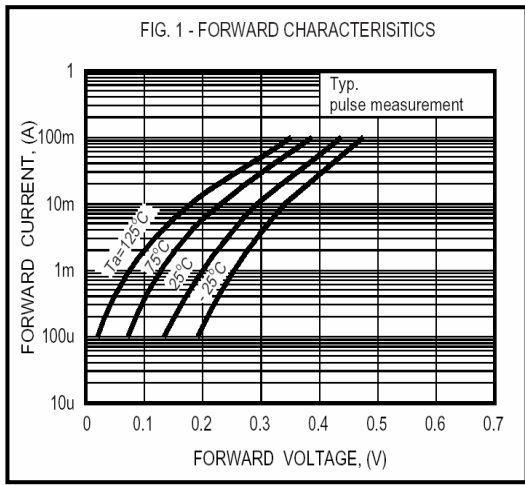

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

**Head Office And Factory:**

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.  
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China  
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165