


连线定义表

LCD	IC
C1~C16	IC1:CO~C15
S1,S61	IC1:S0~S60
C17~C32	IC2:C15~C0
S62,S122	IC2:S0~S60

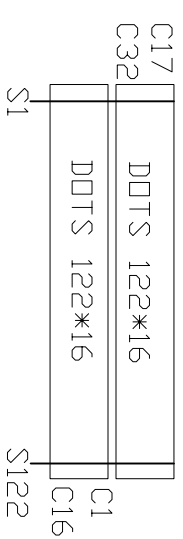

- NOTE:**
1. DISPLAY TYPE: FSTN-POSITIVE-TRANSFLECTIVE
 2. DRIVE METHOD: 1/32 DUTY, 1/5 BIAS, 5V VDD
 3. VIEWING DIR.: 6:00
 4. OP. TEMP.: -20°C~70°C
 5. ST. TEMP.: -30°C~80°C
 6. BACKLIGHT: LED(WHITE), Vf 5.0±0.2V, If 30mA(Max.)
 7. DRIVER IC: NJU6450 OR EQU.

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
SYMBOL	VDD1	VSS	V0	RST	E1	E2	R/W	A0	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

TOLERANCE				HTDISPLAY CO., LTD.		DRAWING No.: HG1223221C-FF62L-VA	
>0~6 ±0.10	>6~80 ±0.20					DRAWING TITLE: LCM DRAWING	
>80~240 ±0.30	>240~400 ±0.50	DESIGN	ZOJYS	06.12.21	STANDARD	REV.: A	SCALE: -
I// 1.0 ±0.10		CHECKED	TECHNOLOGY	Q.A	APPROVED	PROJECTION:	UNIT: mm
						PROJECTION:	SHEET: 1/1

REV.	CHANGE CONTENT	BY	DATE