



OUTLINE DIMENSIONS

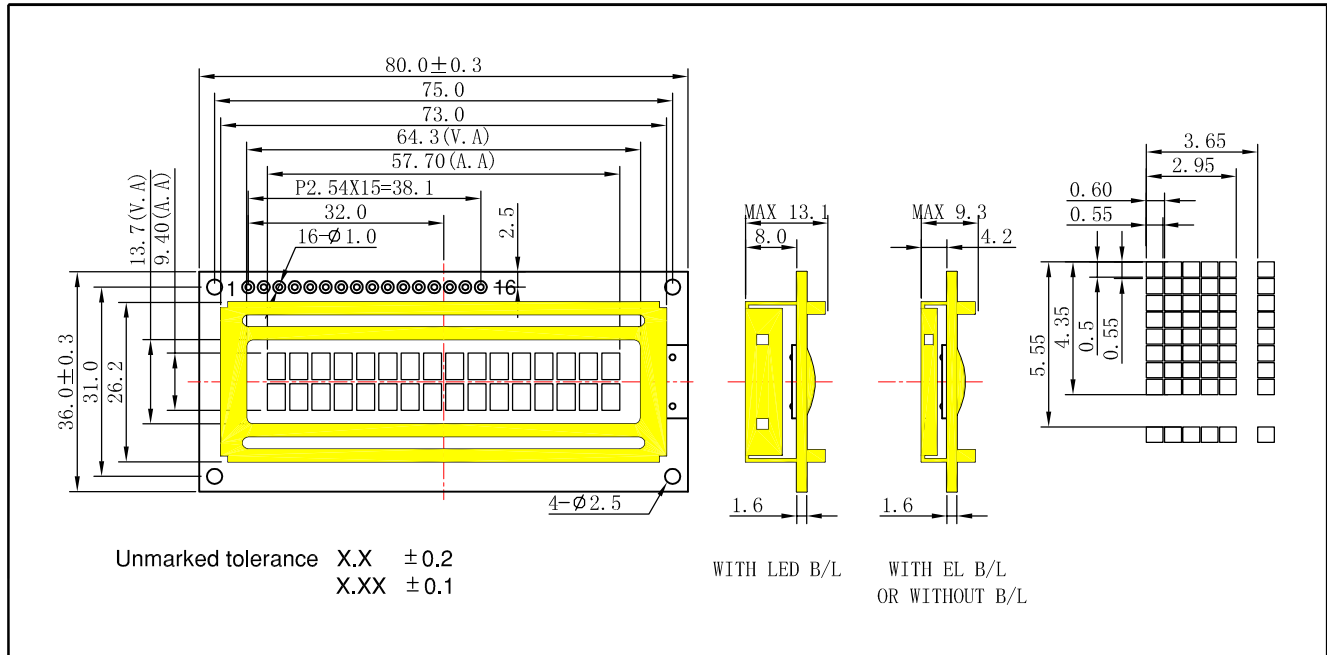

BLOCK DIAGRAM & POWER SUPPLY

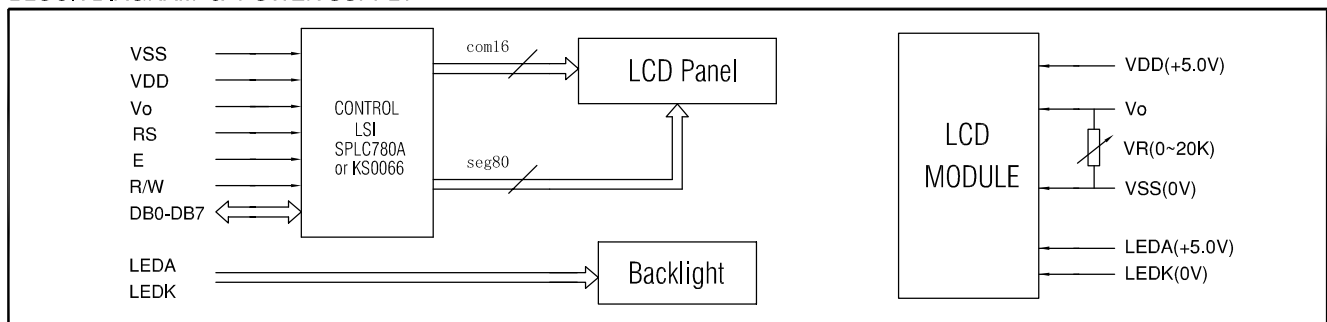

MECHANICAL SPECIFICATIONS & FEATURE

Item	Normal Dimensions(mm)	FEATURE	
Module Size (W*H*T)	80.0×36.0×9.3/13.1	LCD Type	STN、TN、HTN、FSTN
View Area (W*H)	64.3×13.7	LCD Colour	STN:Yellow-Green、Gray Other:Gray
Character Pitch(W*H)	3.65×5.55	View Angle	6 O'clock、12 O'clock
Character Size(W*H)	2.95×4.35	Display Type	Positive Type、Negative Type
Character Font	5×8	Rear polarizer	Transmissive、Reflective、Transflective
Dot Pitch (W*H)	0.55×0.60	Operating Temperature	0°C ~ 50°C、-20°C ~ 70°C
Dot Size (W*H)	0.50×0.55	Backlight	LED:Yellow EL:Green、Blue-Green、Blue Without

ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	V <sub>dd</sub>	T <sub>a</sub> =25° C	---	5.0	---	V
Operating Voltage for LCD	V <sub>lcd</sub>	T <sub>a</sub> =25° C	---	4.5	---	V
Supply Current	I <sub>dd</sub>	T <sub>a</sub> =25° C, V <sub>dd</sub> =5.0V	---	2.0	3.0	mA
Supply Current for Backlight(LED)	I <sub>f</sub>	T <sub>a</sub> =25° C, V <sub>f</sub> =4.2V	---	190	---	mA

INTERFACE PIN CONNECTIONS

Pin No	Symbol	Level	Description
1	VSS	--	Ground for Logic
2	VDD	--	Power supply for Logic(+5.0V)
3	V <sub>o</sub>	--	Power supply for LCD drive
4	RS	H/L	Register selection (H:Data register, L:Instruction register)
5	R/W	H/L	Read/write selection (H:Read,L:Write)
6	E	H/H—L	Enable signal for LCM
7-14	DB0-DB7	H/L	Data Bus lines
15	LEDA	--	Power supply for Backlight(+)
16	LEDK	--	Power supply for Backlight(-)

REMARK

Operating voltage option: 5.0V or 3.0V  
 Pin15 and Pin16 electrode(A、K) can be exchanged  
 Negative type LCD colour: Blue  
 CGROM font option: English、Japanese、Russian、etc