

MD SERIES PEN4-XXXXE4:1 1.5 KV ISOLATED 3 - 4 W REGULATED SINGLE OUTPUT DIP24

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 9 - 36 VDC (24 VDC), 18 – 72 VDC (48 VDC)
 Filter Pi Network

Isolation Specifications

Rated voltage 1500 Vdc
 Resistance 10^9 Ohm
 Capacitance 390 pF typ.

Output Specifications

Voltage accuracy +/- 1 % typ. +/-2% max.
 Ripple and noise (at 20 MHz BW) 60 mV p-p
 Short circuit protection Continuous , restart automatic
 Line voltage regulation +/- 0,5 % max.
 Load voltage regulation +/- 0,5 % max.
 Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 75 % to 80 %
 Switching frequency 260 KHz.

Environmental Specifications

Operating temperature (ambient) -40°C to +85°C
 Storage temperature - 55 °C to + 125 °C
 Derating See graph
 Humidity Up to 90 %, non condensing
 Cooling Free air convection


Physical Characteristics

Dimensions 31,75 x 20,32 x 10,16 mm
 1,25 x 0,80 x 0,40 inches
 Weight 19,0 g
 Case material Nickel Coated Copper


Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
PEN4-243R3E4:1	9 - 36	16	165	3.3	900	75
PEN4-2405E4:1	9 - 36	16	174	5	660	79
PEN4-2412E4:1	9 - 36	18	207	12	330	80
PEN4-2415E4:1	9 - 36	18	207	15	266	80
PEN4-483R3E4:1	18 - 72	10	88	3.3	900	75
PEN4-4805E4:1	18 - 72	10	88	5	660	78
PEN4-4812E4:1	18 - 72	12	88	12	330	80
PEN4-4815E4:1	18 - 72	12	139	15	266	80

Dimensions

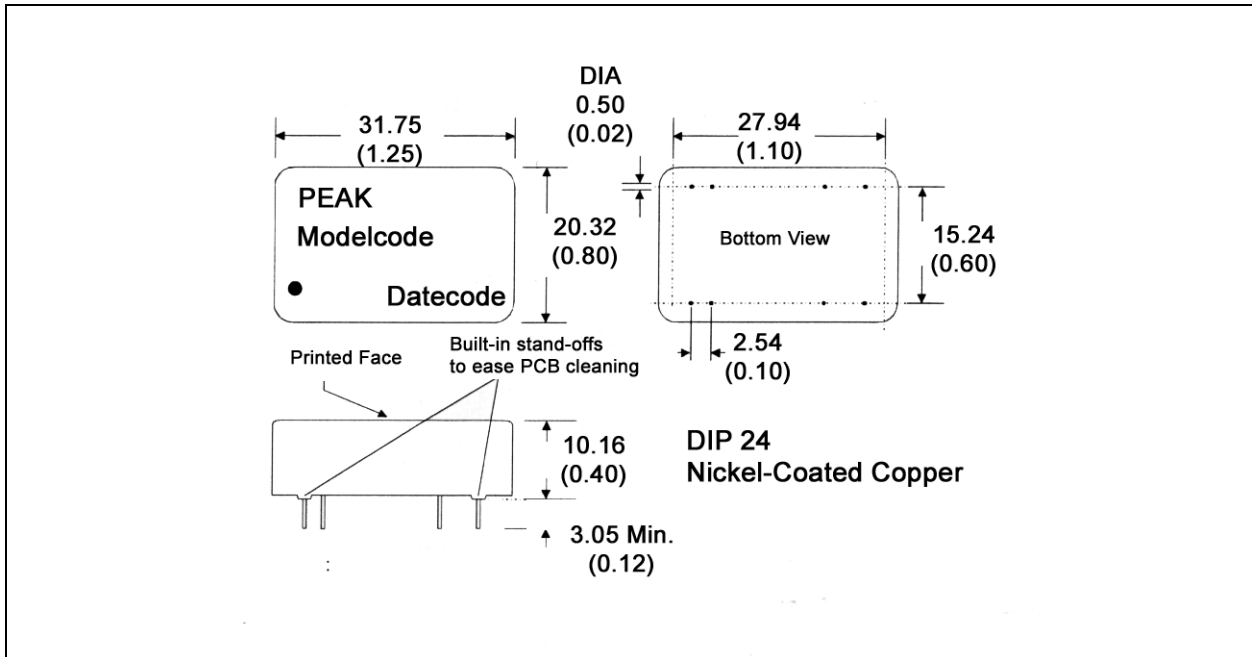

Derating Graph and Pinning

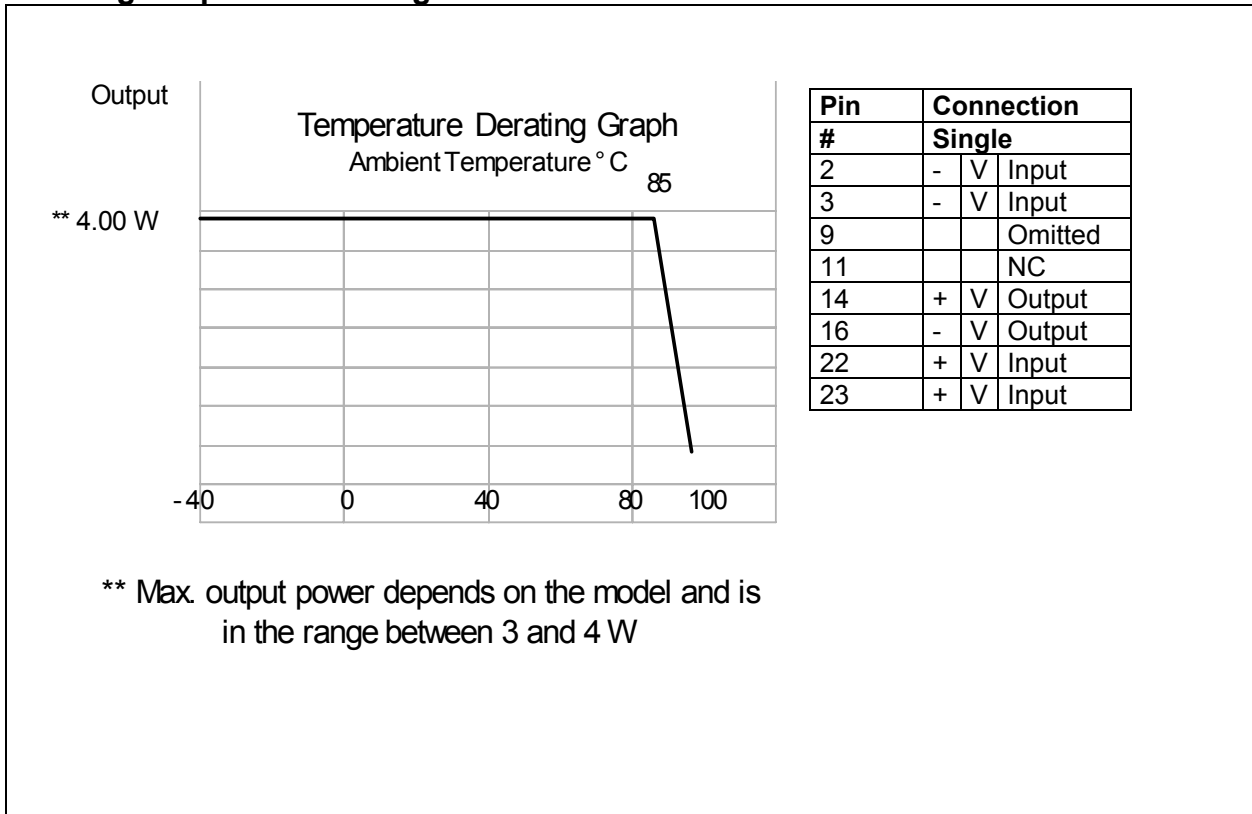

Specification can be changed without notice.

Copyright PEAK electronics GmbH