


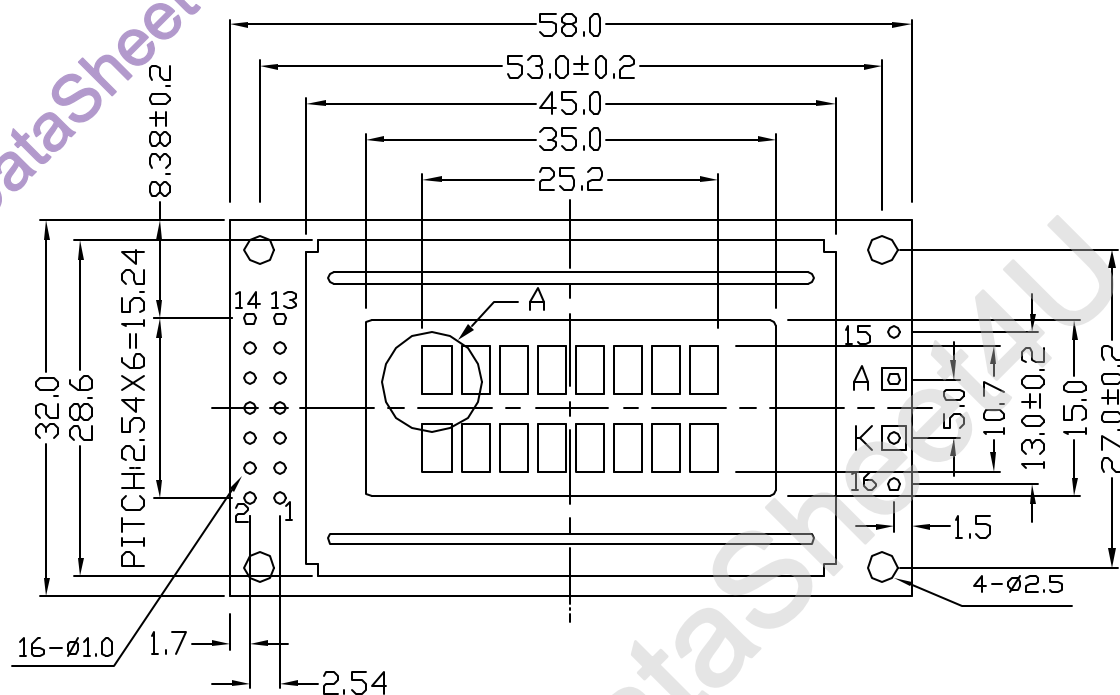


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

- 1.DISPLAY TYPE: FSTN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.7V
- 6.VDD: 5.0V
- 7.BACKLIGHT TYPE: LED(BLUE,4.2V)
- 8.OPERATING TEMP: -20°C-70°C
- 9.STORAGE TEMP: -30°C-80°C
- 10.CONTROLLER: S6A0069X01-COCX
- 11.BEZEL IS TO BE PAINTED BLACK
- 12.UNMARKED TOLERANCE: ±0.3mm

DETAIL A:

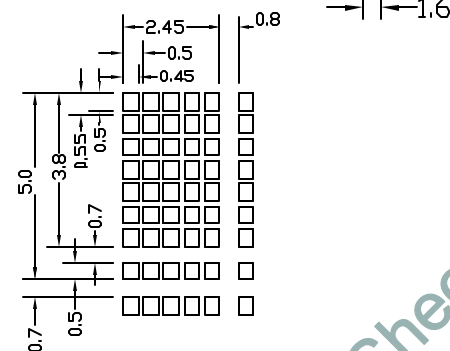

TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:		TITLE: TM82ACCW7		
CHECKED BY:				
APPROVED BY:		DWG NO: G-1		SCALE:
CONFIRMED BY:		DWG NAME: TM82ACCW7G-1		UNIT: mm