





7.2x6.7 Square/Multiturn/Trimming Potentiometer

-- 3266P --

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Special resistances available
100	10	
200	20	
500	50	
101	100	
201	200	
501	500	
102	1,000	
202	2,000	
502	5,000	
103	10,000	
203	20,000	
503	50,000	
104	100,000	
204	200,000	
254	250,000	
504	500,000	
105	1,000,000	
205	2,000,000	

How To Order

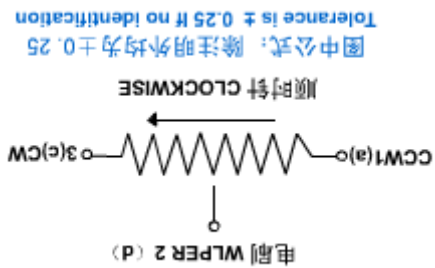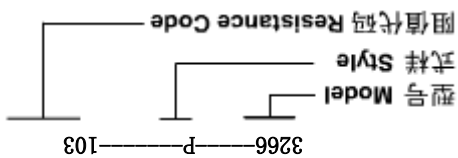

图中公式: 除注明外均为±0.25
Tolerance is ± 0.25 if no identification

Starting Torque.....
35mN·m
Marking.....when no identification, it is of±10%

Physical Characteristics


Electrical Endurance at 70°C.....
0.25W@70°C, 1000h,
ΔR≤10%, R1≥100MΩ, CRV≤3% or 5Ω
Rotational Life.....200cycles
ΔR≤10%, R, CRV≤3% or 5Ω

Environmental Characteristics

Standard Resistance Range.....50Ω~2MΩ
Resistance Tolerance.....±10%
Absolute Minimum Resistance.....≤1%R或10Ω
Contact Resistance Variation.....CRV≤3%或5Ω
Insulation Resistance.....R1≥1GΩ(100Vac)
Withstand Voltage.....500Vac
Effective Travel.....12 turns nom

Electrical Characteristics

Power Rating, 315 volts max
0.25W@70°C, 0.0W@125°C
Temperature Range.....-55°C~125°C
Temperature Coefficient.....±250ppm/°C
Temperature Variation.....-55°C, 30min, +125°C
30min 5cycles
Vibration.....10~
500Hz, 0.75mm, 6h,
ΔR≤5%, R, Δ(Uab/Uac)≤7.5%, R
Collision.....390m/s², 400cycles
ΔR≤5%, R

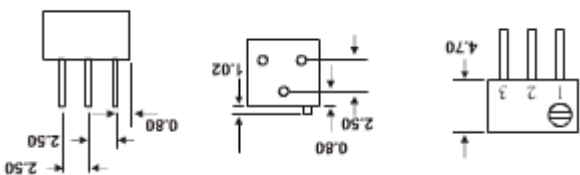

Common Dimensions