

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0561168228

Status:

Active

Description:

CRC™ Shielded Rectangular I/O Male Terminal, Signal, Sequential Type, Reel, Lead-free



Documents:

Drawing (PDF)

Product Specification PS-51238-017 (PDF)

Product Specification PS-51238-018 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	I/O Connectors
Series	56116
Application	N/A
Component Type	Terminal
Product Name	CRC™
Type	N/A
Physical	
Boot Color	N/A
Circuits (Loaded)	N/A
Durability (mating cycles max)	100
Gender	Male
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Orientation	Vertical
Packaging Type	Reel
Panel Mount	N/A
Pitch - Mating Interface (in)	0.000 In
Pitch - Mating Interface (mm)	0.00 mm
Plating min: Mating (µin)	10
Plating min: Mating (µm)	0.25
Plating min: Termination (µin)	40
Plating min: Termination (µm)	1
Polarized to Mating Part	N/A
Polarized to PCB	N/A
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Crimp or Compression
Waterproof / Dustproof	No
Wire Insulation Diameter	1.60mm (.063") max.
Wire Size AWG	24, 28
Electrical	
Current - Maximum per Contact	4A
Voltage - Maximum	250V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-51238-017, PS-51238-018, RPS-51238-001
Sales Drawing	SD-56116-004

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

56116Series

Mates With

56120 24-28 AWG Terminal, 56121 18-22 AWG Terminal

Use With

51233 Pin Housing Assembly, 51234 Socket Housing Assembly

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Extraction Tool for CRC™ Compact Robot Connector Crimp Male Terminal	0638133300

Hand Tool for CRC™ Shielded Rectangular I/O Male Terminals, 24-28 AWG	<u>0638192000</u>
FineAdjust™ Applicator	<u>0638659000</u>

Description	Product #
Applicator for M211A Bench Press, 18-28 AWG, for 56116/56117/56118/56119/56120/56121 Crimp Terminal Hand Extraction Tool	<u>0574073000</u> <u>0574076000</u>

This document was generated on 04/12/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D


C

B


A

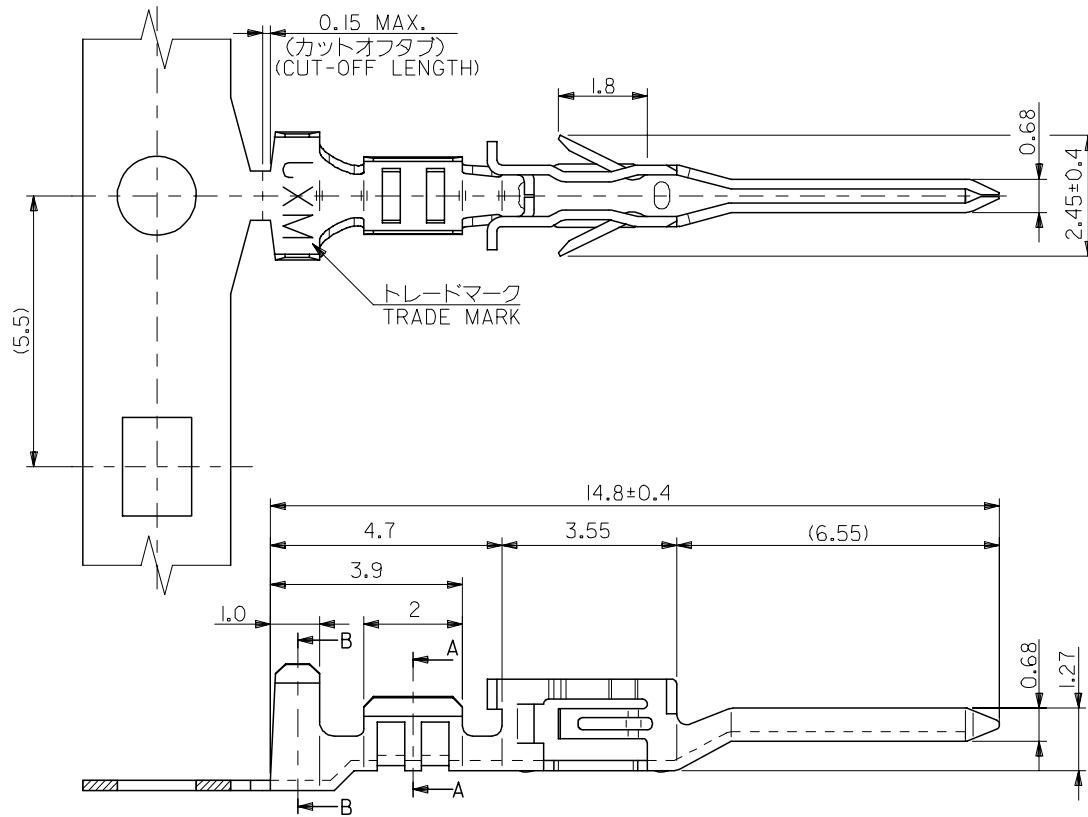

SECTION A-A



SECTION B-B



注記
NOTES

- 材質
MATERIAL
りん青銅 (板厚: 0.2)
PHOSPHOR BRONZE (THICKNESS : 0.2)
- メッキ仕様
TERMINAL PLATING
接点部 : 金メッキ 0.25 μm MIN.
CONTACT AREA : GOLD 0.25 μm MIN.
圧着部 : 錫メッキ 1.0 μm MIN.
CRIMP AREA : TIN 1.0 μm MIN.
下地メッキ : ニッケルメッキ 2 μm MIN.
UNDER PLATE : NICKEL 2 μm MIN.
- 適用電線 : UL 1007 , AWG #24~28
APPLICABLE WIRE RANGE : UL1007 , AWG #24~28
- 被覆外径 : φ1.6 MAX.
INSULATION EXTERNAL DIA : φ1.6 MAX.
- 適用ハウジング : 51233-**** , 51234-****
APPLICABLE HOUSING : 51233-**** , 51234-****

バラ状 LOOSE	56116-8328	56116-8***
連鎖状 CHAIN	56116-8228	
端子形状 TERMINAL CONFIGURATION	MATERIAL No.	MODEL No.

RELEASED EC NO: J2005-2545 DRWN: YSUGIURA01 2005/03/04 CHKD: MTANAKA 2005/03/07 APPR: NUKITA 2005/03/15 0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY YSUGIURA	DATE 2005/03/01	TITLE COMPACT ROBOT CONN. (CRC) CRIMP PIN -LEAD FREE-				
		10 OVER 30 UNDER	±0.25	CHECKED BY MTANAKA	DATE 2005/03/01					
		30 OVER	±0.3	APPROVED BY NUKITA	DATE 2005/03/01	MOLEX INCORPORATED				
		ANGULAR	±3 °	MATERIAL NO.			DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-56116-004			1 OF 1
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						