


ZKS-400WX-A

400W AC-DC ATX Power Supply supports
ATX2.03

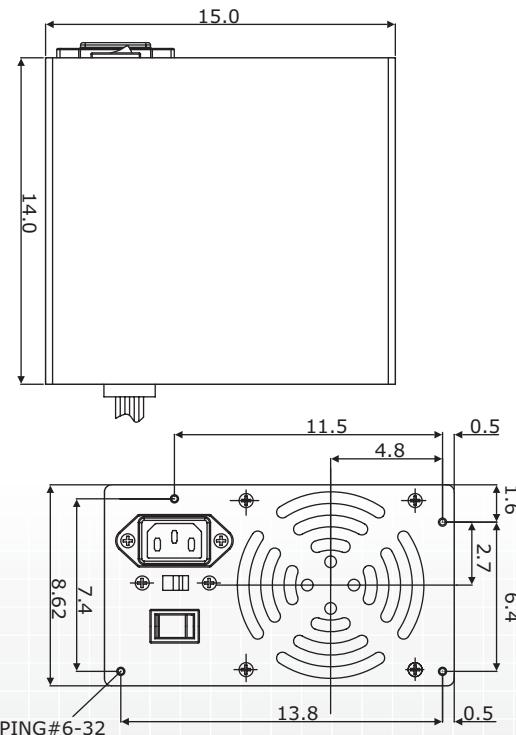

FEATURES

- ***Input Voltage:** 90~135VAC (input 115VAC), 180~260VAC (input 230VAC)
- ***Input Frequency:** 47~63Hz
- ***Input Current:** 9A for 115VAC at without AC outlet; 5A for 230VAC
- ***Inrush Current:** 150A max. at cold start
- ***Switching Frequency:** 30KHz typical
- ***Hold Up Time:** 16ms min.
- ***Brown Out Voltage:** 100VAC max. at 60Hz
- ***Output Power:** 400W at 40°C
- ***Power Up Time:** < 20ms for +5V output voltage
- ***Power Good Signal:** The power good signal will not be higher than 100~500ms after the +5V output stabilizes at its operating value when the unit is turned on
- ***Power Failure:** The TTL compatible signal will go down at least 1ms before +5V below 4.75V
- ***PS ON Signal:** TTL compatible signal (active low)
- ***Efficiency:** 70% min. at full load (AC input 230V)
- ***Altitude:** 10,000 feet
- ***Protection:**
 - Over Voltage: +5V from 5.5~6.8V
 - Over Load: Total output from 110% min. to 160% max.
- ***Thermal System:** Forced air ventilation by DC ball bearing cooling fan; fan status monitoring is optional
- ***Temperature Coefficient:** +0.05% per °C
- ***Temperature:** 0~+45°C (operating); -10~+70°C (storage)
- ***Humidity:** 20~90% RH (operating); 10~98% RH (storage)
- ***Dimensions:** 15.0 x 14.0 x 8.6 cm
- ***MTBF:** 100,000 hrs.

SAFETY STANDARDS

- ***Safety:** UL 1950, UL 1950 D3 / TUV EN60950 / NEMKO 60950 / CE IEC 60950 / CE Test Report

	V1	V2	V3	V4	V5	V6
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
Max. Current	35A	45A	15A	1A	1A	3A
Min. Current	1A	4A	1A	0A	0A	0A
Load Regulation	5%	5%	5%	10%	10%	5%
Line Regulation	1%	1%	1%	1%	1%	1%
Ripple & Noise	50mV	50mV	50mV	100mV	100mV	50mV
*****	Total 245W Max.	*****	*****	*****	*****	*****