


TaNFilm® Flat Precision Resistor Array



SON Series

- Compatible with standard SOIC footprint (210 Series)
- Superior temperature performance
- Tested for COTS Applications
- Absolute tolerances to $\pm 0.05\%$
- Ratio tolerances to $\pm 0.01\%$

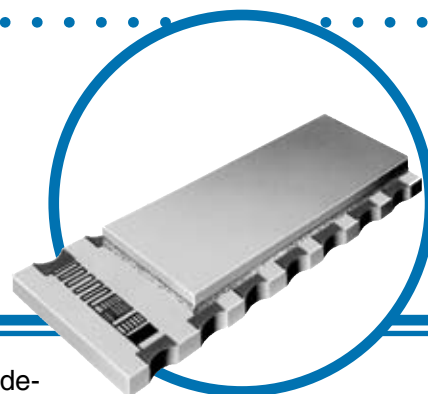

Welwyn's TaNFilm® Small Outline Leadless Resistor Networks are ideally suited for applications requiring precision, long term reliability and stability in a small area. Its monolithic construction eliminates vulnerable terminations such as solder connections. The SON package is ideal for the all surface mount production reflow techniques while still possessing all the unique qualities of our TaNFilm® thin film system. Testing has demonstrated performance exceeding MIL-PRF-83401 Characteristic H.

Electrical Data

Package	Power Rating at 70°C		Temperature Range	Maximum Voltage	Noise	Substrate	Termination
	Element	Network					
8-Pad	100mW	400mW	-55°C to +150°C	50V (not to exceed $\sqrt{P \times R}$)	< -25dB	99.5% Alumina	Solder plated over nickel barrier
14-Pad	100mW	700mW					
16-Pad	100mW	800mW					

Pb- Free finish on commercial parts, Sn Pb Finish on military parts, is standard

Manufacturing Capabilities

	Resistance Range	Available Absolute Tolerances	Available Ratio Tolerances (Ratio to R1)	Best Absolute TCR	Tracking TCR (Track to R1)
Schematic A	10Ω - 25Ω	C D F G J	C D F G	$\pm 100\text{ppm}/^\circ\text{C}$	$\pm 20\text{ppm}/^\circ\text{C}$
	25.1Ω - 50Ω	C D F G J	B C D F G	$\pm 50\text{ppm}/^\circ\text{C}$	$\pm 10\text{ppm}/^\circ\text{C}$
	50.1Ω - 200Ω	B C D F G J	B C D F G	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 5\text{ppm}/^\circ\text{C}$
	201Ω - 100KΩ	B C D F G J	A B C D F G	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 5\text{ppm}/^\circ\text{C}$
Schematic B	10Ω - 25Ω	C D F G J	D F G	$\pm 100\text{ppm}/^\circ\text{C}$	$\pm 25\text{ppm}/^\circ\text{C}$
	25.1Ω - 50Ω	C D F G J	C D F G	$\pm 50\text{ppm}/^\circ\text{C}$	$\pm 15\text{ppm}/^\circ\text{C}$
	50.1Ω - 200Ω	B C D F G J	B C D F G	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 10\text{ppm}/^\circ\text{C}$
	201Ω - 50KΩ	B C D F G J	A B C D F G	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 5\text{ppm}/^\circ\text{C}$

General Note

Welwyn Components reserves the right to make changes in product specification without notice or liability. All information is subject to Welwyn's own data and is considered accurate at time of going to print.


© Welwyn Components Limited Bedlington, Northumberland NE22 7AA, UK
 Telephone: +44 (0) 1670 822181 • Facsimile: +44 (0) 1670 829465 • Email: info@welwyn-tt.com • Website: www.welwyn-tt.com



A subsidiary of
TT electronics plc

TaNFilm® Flat Precision Resistor Array

Physical Data

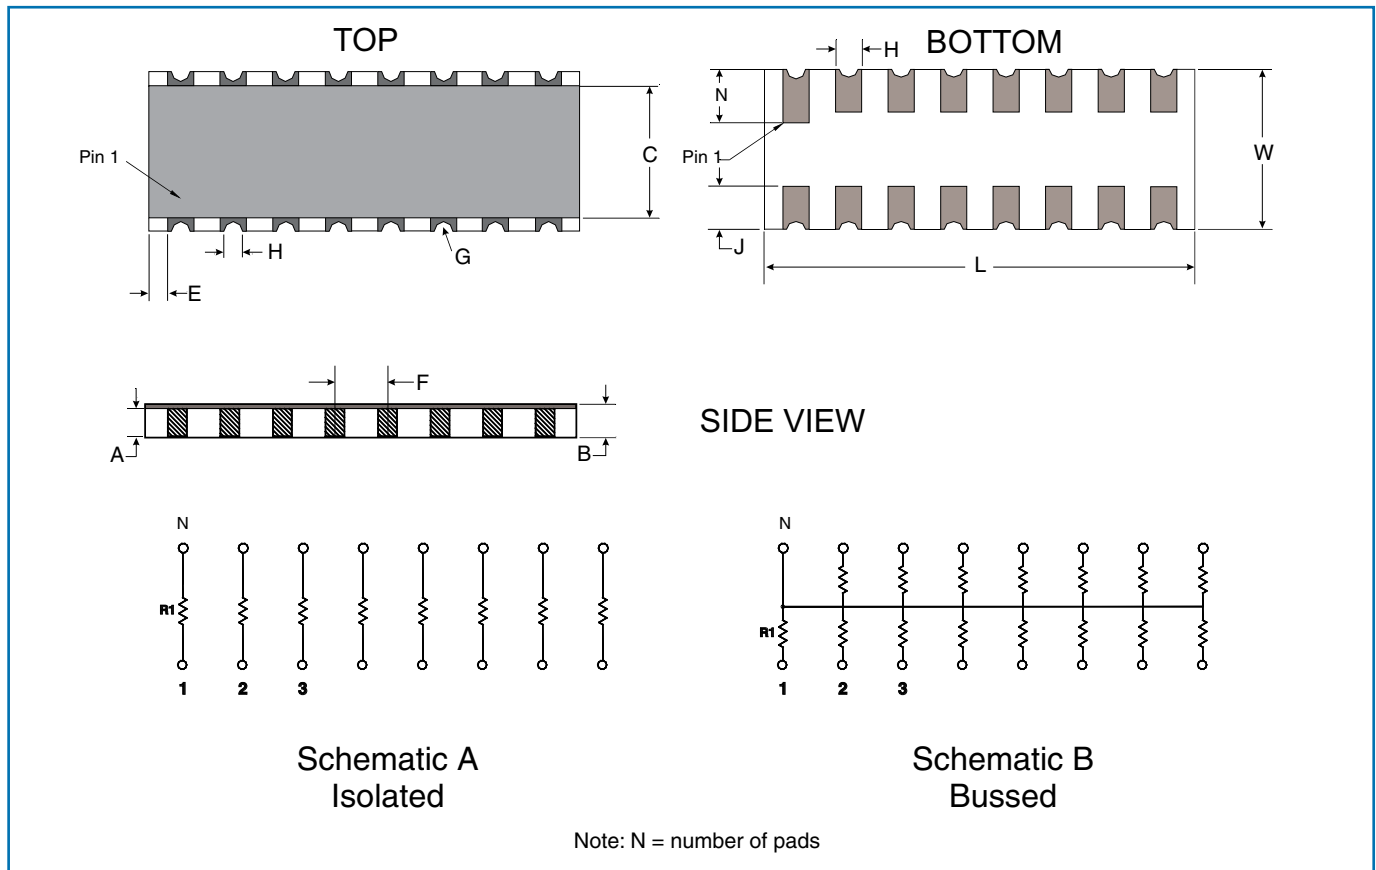

Dimension (mm)	150 Series			210 Series		
	8-Pad Model NS4x	14-Pad Model NS7x	16-Pad Model NS8x	8-Pad Model N95x	14-Pad Model N98x	16-Pad Model N99x
A	0.686	0.686	0.686	0.686	0.686	0.686
B	0.711	0.711	0.711	0.711	0.711	0.711
C	3.175	3.175	3.175	5.33 ± 0.25	4.318	4.318
E	0.635	0.635	0.635	0.635	0.635	0.635
F	1.270	1.270	1.270	1.270	1.270	1.270
G	0.229R	0.229R	0.229R	0.254R	0.254R	0.254R
H	0.762	0.762	0.762	0.762	0.762	0.762
J	1.016	1.016	1.016	1.016	1.016	1.016
L	5.33 ± 0.25	0.91	10.41	5.08	8.89	10.16
N	1.270	1.270	1.270	1.270	1.270	1.270
W	3.81	3.81	3.81	5.33	5.33	5.33

Tolerances unless noted otherwise:
 .XXX is ± 0.13
 .XX is ± 0.25


TaNFilm® Flat Precision Resistor Array



Environmental Data

Environmental Test	Test Method	Characteristic K Limits (ΔR)	Characteristic H Limits (ΔR)	TaNFilm™ Maximum ΔR	TaNFilm™ Typical ΔR
Thermal Shock and Power Conditioning	MIL-PRF-83401	$\pm 0.7\%$	$\pm 0.5\%$	$\pm 0.1\%$	$\pm 0.02\%$
Low Temperature Operation	MIL-PRF-83401	$\pm 0.25\%$	$\pm 0.1\%$	$\pm 0.05\%$	$\pm 0.02\%$
Short Time Overload	MIL-PRF-83401	$\pm 0.25\%$	$\pm 0.1\%$	$\pm 0.05\%$	$\pm 0.02\%$
Resistance to Bonding Exposure	MIL-PRF-914	$\pm 0.25\%$	$\pm 0.25\%$	$\pm 0.1\%$	$\pm 0.02\%$
Moisture Resistance	MIL-PRF-83401	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.1\%$	$\pm 0.03\%$
Shock	MIL-PRF-83401	$\pm 0.25\%$	$\pm 0.25\%$	$\pm 0.1\%$	$\pm 0.03\%$
Vibration	MIL-PRF-83401	$\pm 0.25\%$	$\pm 0.25\%$	$\pm 0.1\%$	$\pm 0.03\%$
Life	MIL-PRF-83401	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.1\%$	$\pm 0.03\%$
High Temperature Exposure	MIL-PRF-83401	± 0.5	± 0.2	$\pm 0.1\%$	$\pm 0.03\%$
Low Temperature Storage	MIL-PRF-83401	± 0.25	± 0.1	$\pm 0.05\%$	$\pm 0.01\%$

Power Derating

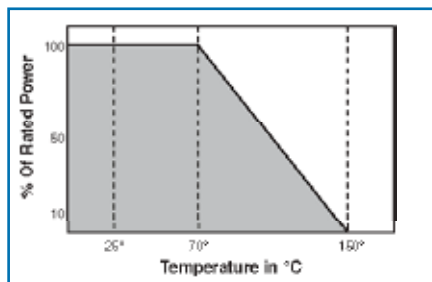

Ordering Procedure

N989 - 01 - 10k - F B

Model

- NS4A, N959: 8-pad, 4 resistor, schematic A
- NS4B, N954: 8-pad, 7 resistor, schematic B
- NS7A, N989: 14-pad, 7 resistor, schematic A
- NS7B, N987: 14-pad, 13 resistor, schematic B
- NS8A, N999: 16-pad, 8 resistor, schematic A
- NS8B, N997: 16-pad, 15 resistor, schematic B

TCR Code

- 01 = $\pm 100\text{ppm}/^\circ\text{C}$ Commercial Grade
- 02 = $\pm 50\text{ppm}/^\circ\text{C}$ Commercial Grade
- 03 = $\pm 25\text{ppm}/^\circ\text{C}$ Commercial Grade
- 04 = $\pm 300\text{ppm}/^\circ\text{C}$ Military Screened Characteristic M
- 05 = $\pm 100\text{ppm}/^\circ\text{C}$ Military Screened Characteristic K
- 06 = $\pm 50\text{ppm}/^\circ\text{C}$ Military Screened Characteristic H
- 07 = $\pm 25\text{ppm}/^\circ\text{C}$ Military Screened Characteristic H

Optional R1 Ratio Tolerance Code

- F = $\pm 1\%$; D = $\pm 0.5\%$; B = $\pm 0.1\%$
- A = $\pm 0.05\%$; S = $\pm 0.025\%$
- Q = $\pm 0.02\%$; T = $\pm 0.01\%$

Absolute Tolerance Code

- J = $\pm 5\%$; G = $\pm 2\%$; F = $\pm 1\%$
- D = $\pm 0.5\%$; C = $\pm 0.25\%$
- B = $\pm 0.1\%$; A = $\pm 0.05\%$

Value (use IEC62 code)

- 4-Digit resistance code
- Ex: 1002 = 10k Ω ; 49R9 = 49.9 Ω

Special Notes:

- SON 150 NSxx series screened per Group A MIL-PRF-55342
- SON 210 N9xx series screened per Group A MIL-PRF-83401

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

N989 - 01 - 10kFB