

Voltage Ratings

Part number	100BGQ045
V_R Max. DC Reverse Voltage (V)	45
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	100BGQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	100	A	50% duty cycle @ $T_C = 100^\circ\text{C}$, rectangular wave form
$I_{F(RMS)}$ RMS Forward Current	141	A	$T_C = 95^\circ\text{C}$
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	4400	A	5 μs Sine or 3 μs Rect. pulse
	830		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	40	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 6$ Amps, $L = 2.0$ mH
I_{AR} Repetitive Avalanche Current	6	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	100BGQ		Units	Conditions	
	Typ.	Max.			
V_{FM} Forward Voltage Drop (1) (2)	0.52	0.56	V	@ 50A	$T_J = 25^\circ\text{C}$
	0.67	0.73	V	@ 100A	
	0.47	0.52	V	@ 50A	$T_J = 150^\circ\text{C}$
	0.63	0.68	V	@ 100A	
I_{RM} Reverse Leakage Current (1)	0.3	1	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	180	320	mA	$T_J = 125^\circ\text{C}$	
	600	1000	mA	$T_J = 150^\circ\text{C}$	
$V_{F(TO)}$ Threshold Voltage	0.379		V	$T_J = T_J$ max.	
r_t Forward Slope Resistance	2.7		m Ω		
C_T Max. Junction Capacitance	2700		pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C	
L_S Typical Series Inductance	3.5		nH	Measured from tab to mounting plane	
dv/dt Max. Voltage Rate of Change	10000		V/ μs	(Rated V_R)	

(1) Pulse Width < 300 μs , Duty Cycle < 2%(2) $V_{FM} = V_{F(TO)} + r_t \times I_F$

Thermal-Mechanical Specifications

Parameters	100BGQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case	0.50	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.20	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	5(0.18)	g(oz.)	
T Mounting Torque	Min.	1.2(10)	N*m (lbf-in)
	Max.	2.4(20)	
Case Style	PowIRtab™		

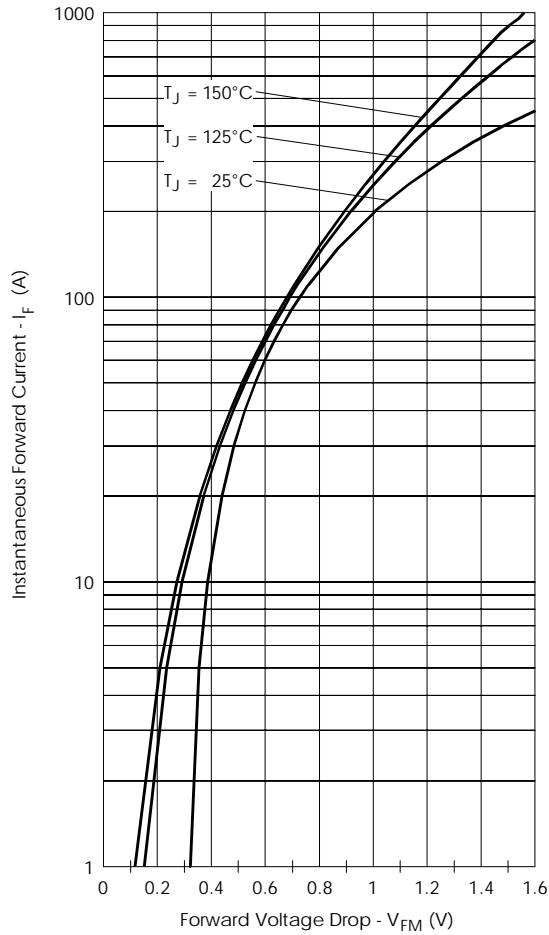


Fig. 1 - Maximum Forward Voltage Drop Characteristics

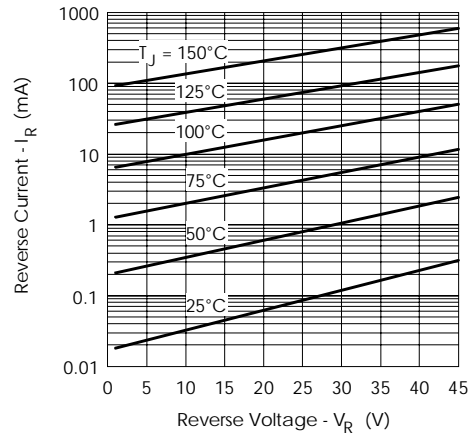


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

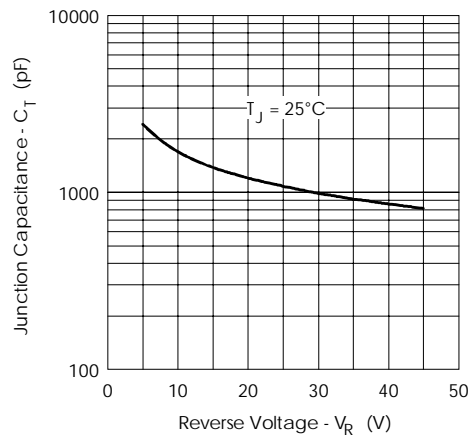


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

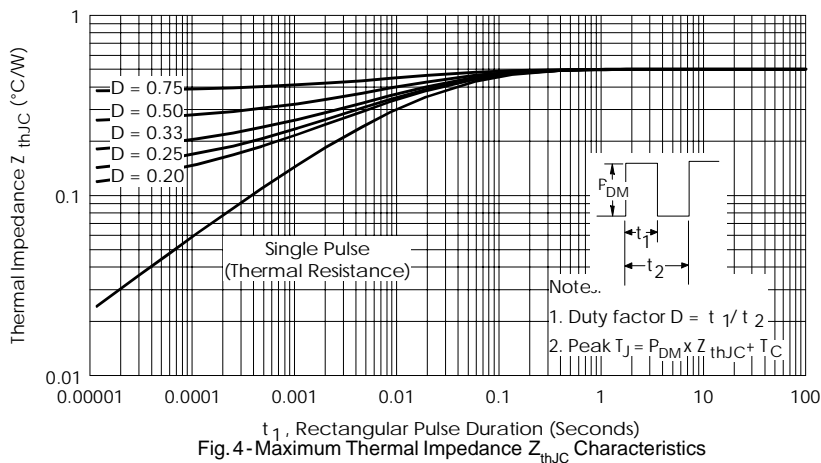


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

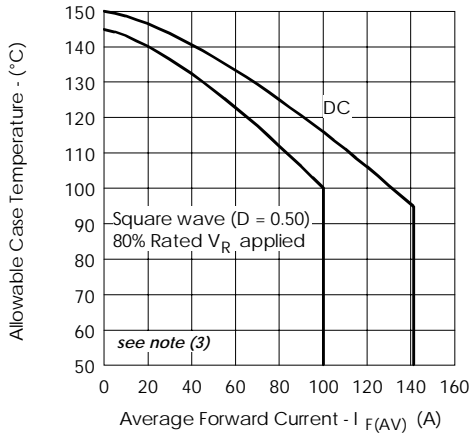


Fig.5- Maximum Allowable Case Temperature Vs. Average Forward Current

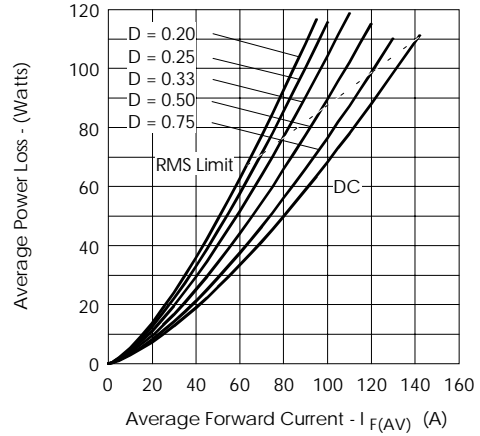


Fig.6- Forward Power Loss Characteristics

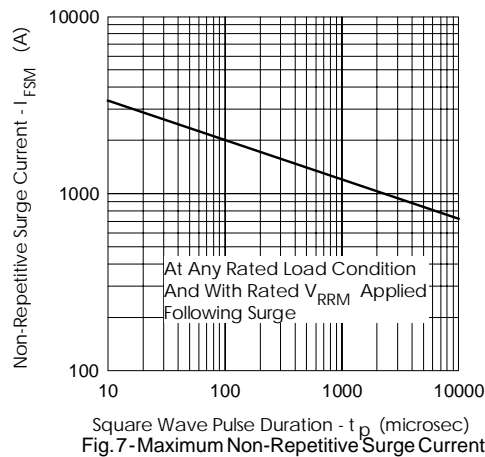


Fig.7- Maximum Non-Repetitive Surge Current

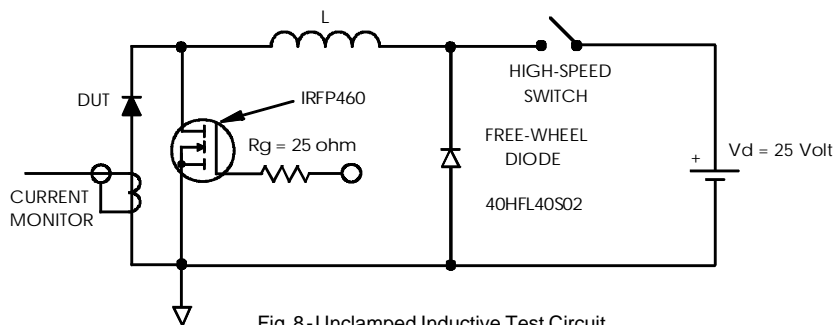




Fig.8- Unclamped Inductive Test Circuit

(3) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$;


$P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

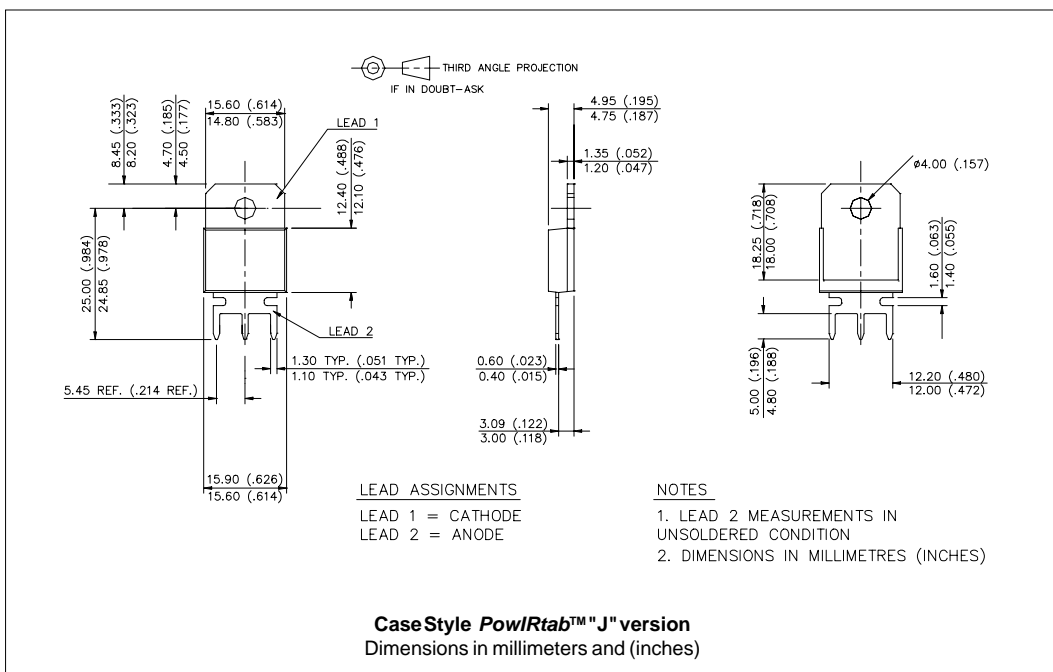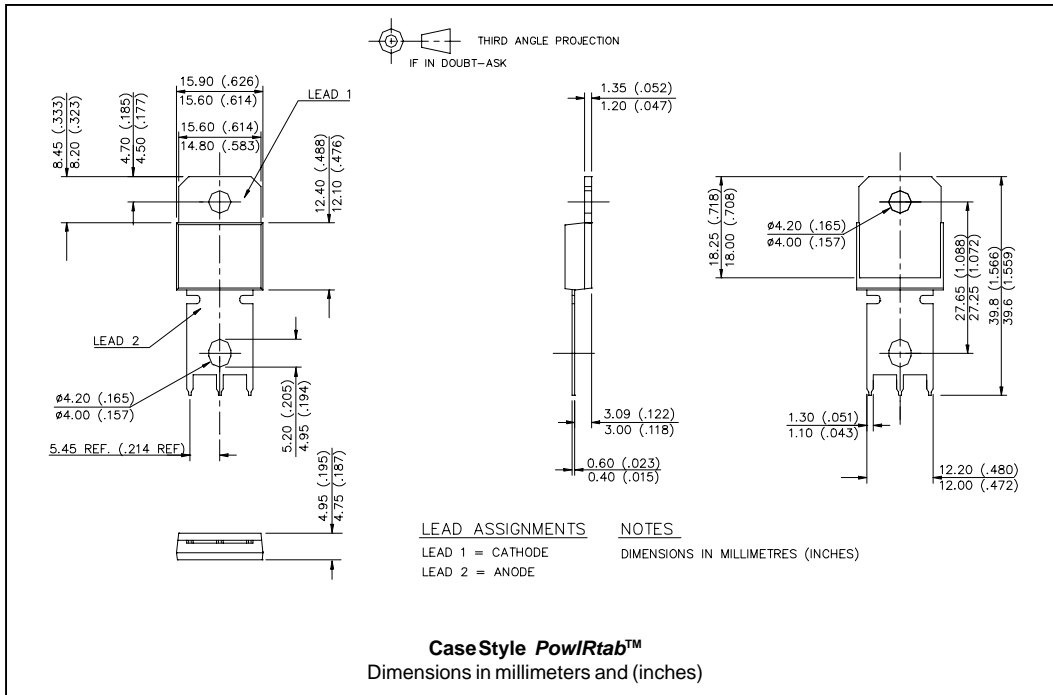

Ordering Information Table

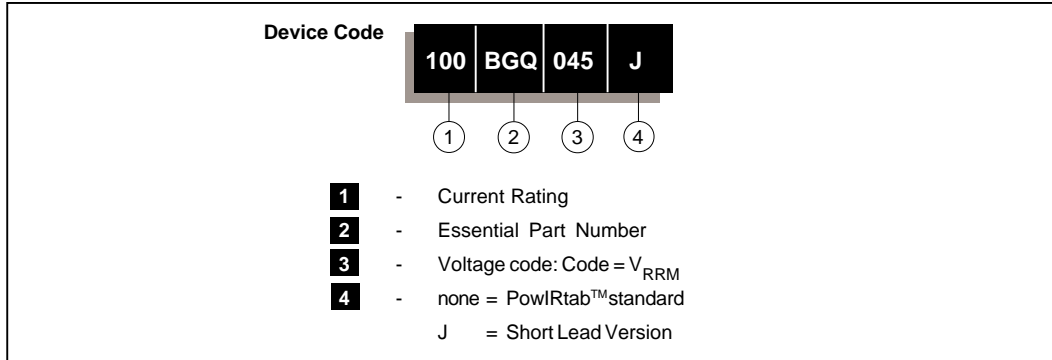

```

*****
This model has been developed by
Wizard SPICE MODEL GENERATOR(1999)
(International Rectifier Corporation)
contains Proprietary Information

*****
SPICE Model Diode is composed by a
simple diode plus paralld VCG2T
*****

.SUBCKT 100bgq45 ANO CAT
D1 ANO 1 DMOD (0.24359)
*Define diode model
.MODEL DMOD D(IS=6.61799286342482E-05A,N=1.0212796726385,BV=45V,
+IBV=0.115140026620575A,RS=0.0005748724,CJO=3.31930927290723E-08,
+VJ=0.456112448442971,XTI=2,EG=0.721992455742664)
*****
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=9.83346387011944)
GP1 ANO CAT VALUE={-ABS(I(VX))*(EXP(((((-2.949174E-03/
9.833464)*((V(2,CAT)*1E6)/(I(VX)+1E-6)-1))+1)*6.600191E-2*ABS(V(ANO,CAT)))-1)}

*****
.ENDS 100bgq45

Thermal Model Subcircuit
.SUBCKT 100bgq45T 5 1

CTHERM1 5 4 1.66E+3
CTHERM2 4 3 2.22E+2
CTHERM3 3 2 1.48E+5
CTHERM4 2 1 3.12E+5

R THERM1 5 4 3.42E-2
R THERM2 4 3 2.55E-1
R THERM3 3 2 8.41E-2
R THERM4 2 1 1.81E-4

.ENDS 100bgq45T
    
```

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 12/02