




multimec® 3F + 1P/1Q/1R

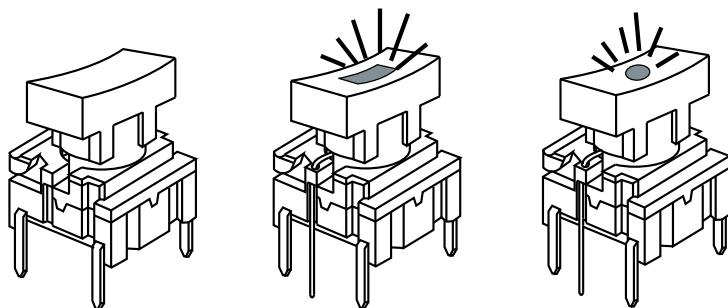



Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -55/+115°C
high temp: -40/+160°C



Dimensions (through-hole)





PCB layout





Dimensions (w/LED)





PCB layout (top view)



Dimensions (SMD)



PCB layout



How to order

3 F

Switch



Mounting

T through-hole

S surface mount



L 6 low temp.
H 9 high temp.

+

1 P

Cap



00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

Standard versions:

3FTL6
3FTH9
3FSH9

3 F

Switch



Mounting

T through-hole



L 6 low temp.
H 9 high temp.

+



LED
20 green
40 yellow
80 red

+



1Q



1R



00 blue
03 grey
08 red
09 black

1

Lens

1 transparent

Standard versions:

3FTL620
3FTL640
3FTL680

Ordering example: 3 FTL680 + 1Q091

MEC · Industriparken 23 · P.O. BOX 26 · DK-2750 Ballerup · Denmark

Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: <http://www.mec.dk> · E-mail: danmec@mec.dk