

HANDWHEELS

TYPE

PATTERN



THREAD OR BORE



LENGTH OF
MALE THREAD

Scallop handwheel - high impact resistant





RENKOL

3

Matt finish thermoplastic





FEMALE	I525	28	17	11	6	11	M5	M6	
Aluminium insert	I513	40	20	15	8	12	M6	M8	
	I514	50	24	15	9	15	M6	M8	
	I515	60	30	19	12	18	M8	M10	
MALE	I525/M	28	17	11	6	11	M5	M6	10 15 20
Plated steel insert	I513/M	40	20	15	8	12	M6	M8	15 20 25 35
	I514/M	50	24	15	9	15	M6	M8	20 25 35 40
	I515/M	60	30	19	12	18	M8	M10	20 30 40
THREADED RIGHT THROUGH	I525/T	28	17	11	6	11	M5	M6	
Aluminium insert	I513/T	40	20	15	8	12	M6	M8	
	I514/T	50	24	15	9	15	M6	M8	
	I515/T	60	30	19	12	18	M8	M10	








Star handwheel - high impact resistant

Matt finish thermoplastic



FEMALE	I526	28	17	11	6	11	M5	M6	
Aluminium insert	I507	40	20	15	8	12	M6	M8	
	I508	50	24	15	9	15	M6	M8	
	I509	60	30	19	12	18	M8	M10	
MALE	I526/M	28	17	11	6	11	M5	M6	10 15 20
Plated steel insert	I507/M	40	20	15	8	12	M6	M8	15 20 25 35
	I508/M	50	24	15	9	15	M6	M8	20 25 35 40
	I509/M	60	30	19	12	18	M8	M10	20 30 40
THREADED RIGHT THROUGH	I526/T	28	17	11	6	11	M5	M6	
Aluminium insert	I507/T	40	20	15	8	12	M6	M8	
	I508/T	50	24	15	9	15	M6	M8	
	I509/T	60	30	19	12	18	M8	M10	

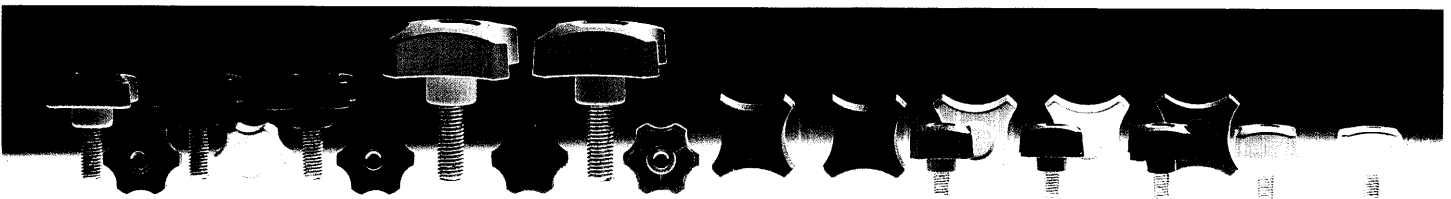

TYPE

PATTERN



THREAD OR BORE

LENGTH OF
MALE THREAD

Most patterns are available with imperial threads (Whitworth) or bores

Non standard thread diameters, lengths, insert materials and other modifications are available for minimum quantities. The standard colour is black. These patterns are available in a choice of colours. Contact our sales department for details.

All dimensions in mm and are approximate