



multimec®

3F+1N

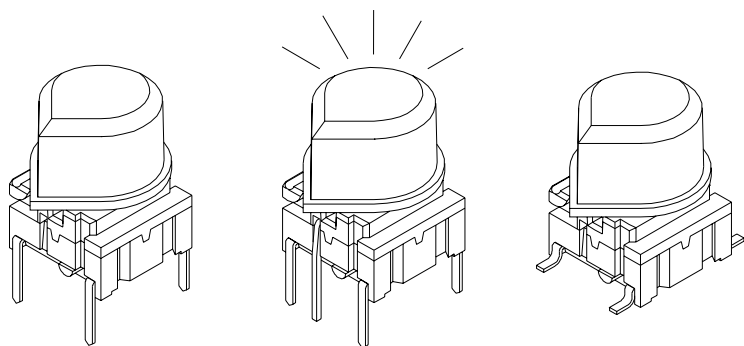


Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
 - low temp: -40/+115°C
 - high temp: -40/+160°C

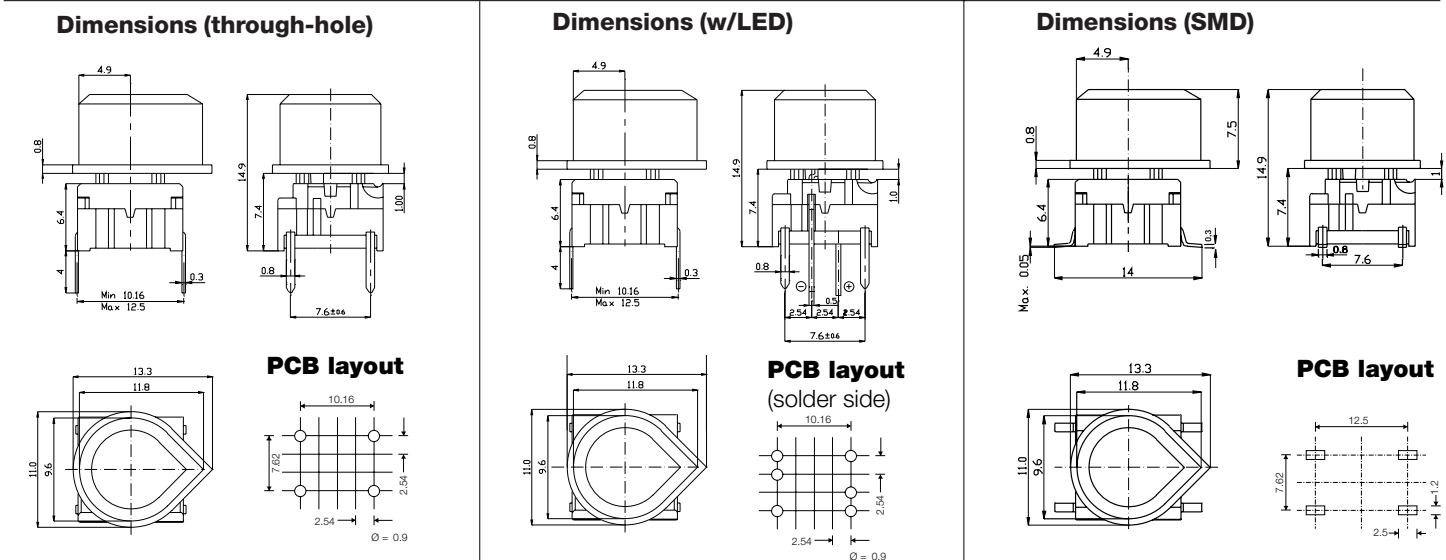

8 different position options

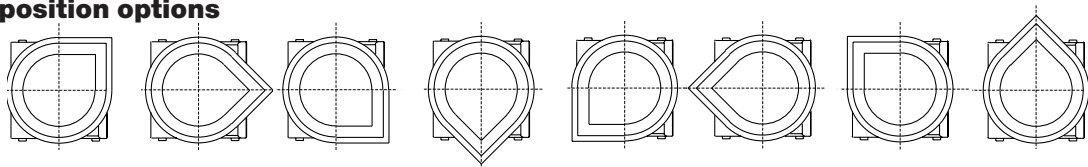

HOW TO ORDER

3 F

Switch

Mounting

L 6 low temp.

H 9 high temp.

+

Cap

1N

00 blue

03 grey

04 yellow

08 red

09 black

custom colours on request

Standard versions:
3FTL6, 3FTH9, 3FSH9

3 F

Switch

T

Mounting

L 6 low temp.

H 9 high temp.

+

Cap

1N

10 transparent blue

12 transparent green

14 transparent yellow

16 transparent white

18 transparent red

3 F

Switch

T

Mounting

L 6 low temp.

H 9 high temp.

+

Cap

1N

00 blue

20 green

40 yellow

80 red

2040 green/yellow

8020 red/green

8040 red/yellow

Standard versions:

3FTL600, 3FTL620, 3FTL640, 3FTL680

3FTL62040, 3FTL68020, 3FTL68040

Combinations of high temperature switches with LEDs will be limited by the temperature capability of the LED.

Ordering example: 3FTL6 + 1N09 or 3FTL680 + 1N18