


Est. 1898
Sheffield
England

Fact Finder on: WOODWORKING VICES



RECORD WOODWORKING VICES ARE, TO THE PROFESSIONAL JOINER & CARPENTER, WHAT OUR METALWORKING VICES ARE TO AN ENGINEER - THE FIRST CHOICE. THE VICES DESCRIBED HERE ARE THE LARGE HEAVY DUTY MODELS THAT FIT PERMANENTLY UNDER THE BENCH TOP WITH THE TOP OF THE JAWS ON A LEVEL WITH THE WORKING SURFACE.

Adjustable 'Dog' used in conjunction with bench stops fitted into the bench top.

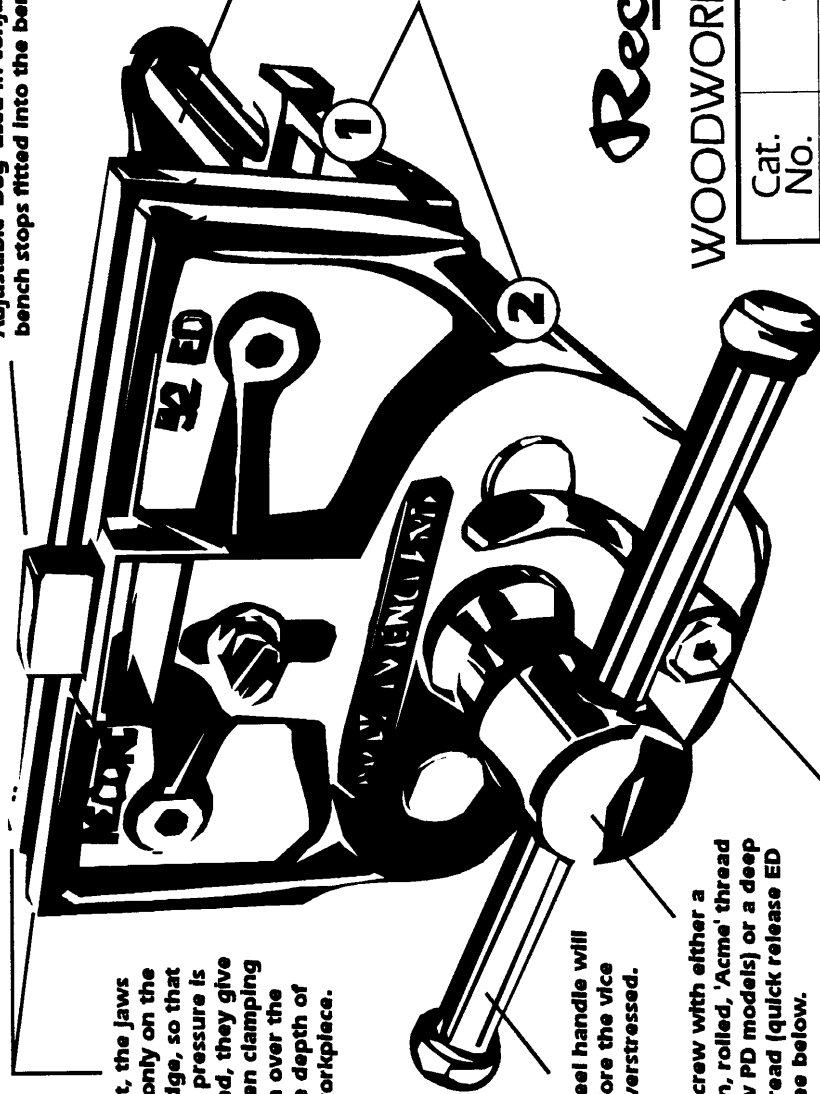


At rest, the jaws meet only on the top edge, so that when pressure is applied, they give an even clamping action over the whole depth of the workplace.

Two steel guide rods, accurately made & fitted, reduce wear and ensure a smooth, parallel action.

The body (1) and front plate (2) are precision machined, high grade, grey iron castings from our own foundry.

'Fused' steel handle will bend before the vice can be overstressed.

Steel mainscrew with either a quick action, rolled, 'Acme' thread (plain screw PD models) or a deep buttress thread (quick release ED models) - see below.

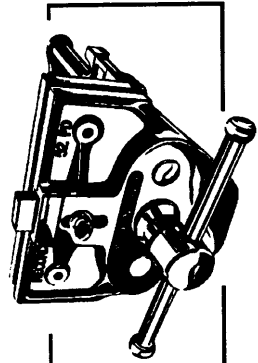

This trigger on the 52ED controls the Quick Release Mechanism which, by disengaging the mainscrew, allows the front plate to slide freely. This is a valuable, time saving feature in repetitive work situations. When the trigger is released, the screw action re engages. The almost identical 52PD on the right has a plain mainscrew for normal working conditions and is less expensive than an ED model.

Est. 1898
Sheffield
England
Record
HAND TOOLS

WOODWORKING VICES

Cat. No.	Jaw Width
52PD	7" - 175mm
52.1/2PD	9" - 230mm
53PD	10.5" - 265mm
52ED	7" - 175mm
52.1/2ED	9" - 230mm
53ED	10.5" - 265mm