



CONNOR-WINFIELD
CORPORATION

AURORA, IL. 60505

PHONE (708) 851-4722


FAX (708) 851-5040

OSCILLATORS

8 PIN DIP ADVANCED CMOS

SPECIFICATIONS		A73
Frequency Range		10MHz to 50MHz
Frequency Tolerance		+/- .01%
Temperature Range		-55 to +125 degrees C
Output		CMOS Squarewave, TTL Compatible
Voltage	Voh	4.4V Min
	Vol	0.44V Max
Duty Cycle		50/50 +/-5% Max, +/-2% Typ
Rise/Fall Time		3nS, 15pf Load
Current		I _o : 24mA Max
Supply Voltage		+5Vdc +/-5%
Supply Current		100mA Max
Package		All metal, hermetically sealed, welded package

WARNING: Do not insert oscillator into a powered up circuit.
Failure to comply will result in damage to oscillator.

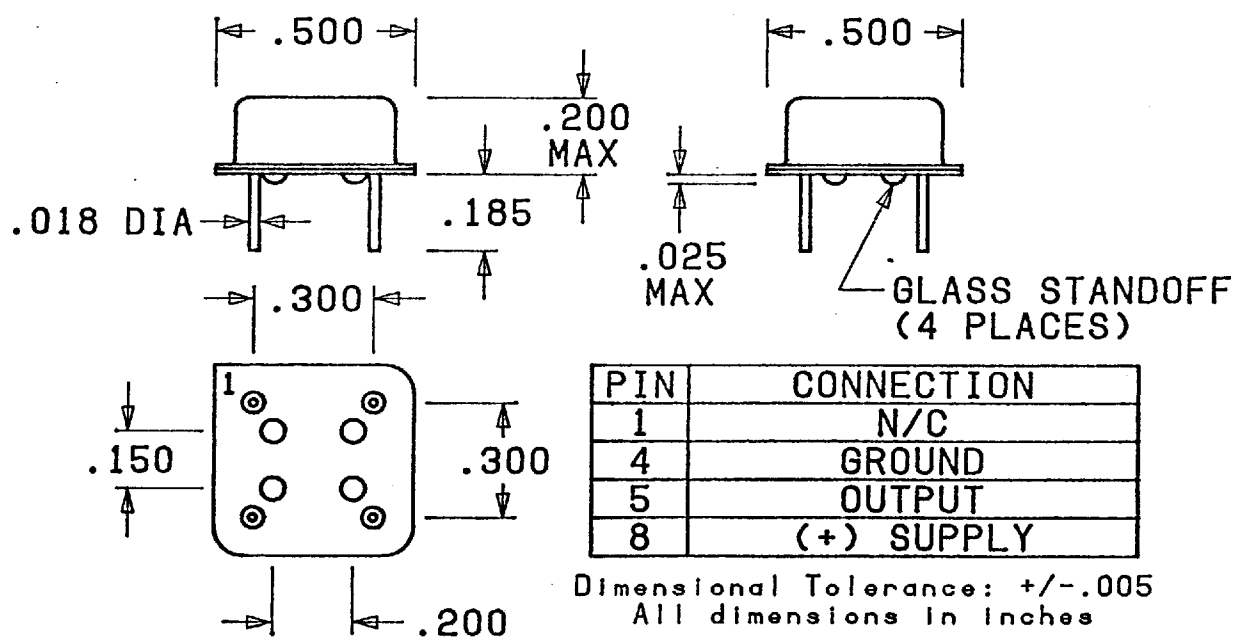

Please phone or write for additional information

9-12-91

Bulletin subject to change without notice