



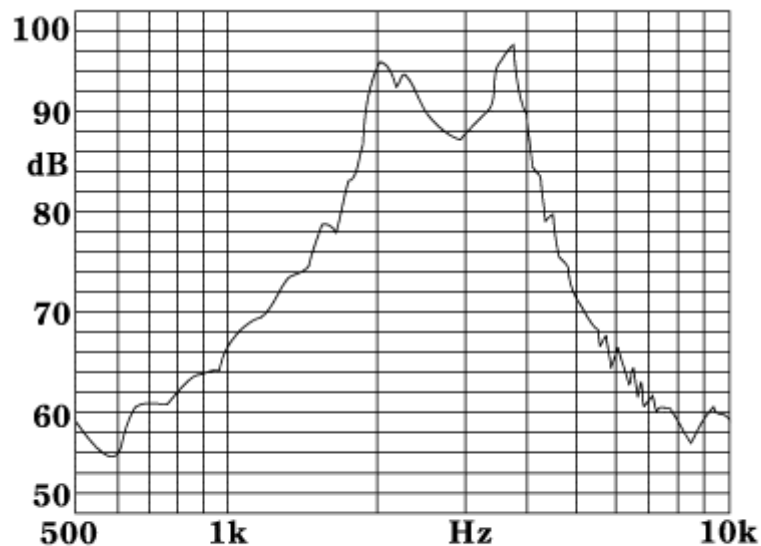

Type	BMT-1201S	BMT-1206S	BMT-1212S
Rated Voltage(V)	1.5	6	12
Operating Voltage(V)	1~2	4~8	7~16
◆Rated Current(mA)	<70	<40	
Coil Resistance(Ω)	6.5±1.0	45±5	140±14
◇Coil Impedance(Ω)	16	80	240
◆Sound Output at 10cm(dB)	>75	>85	
Resonant Frequency(Hz)	2400		
Operating Temperature($^{\circ}$ C)	-25~+70		
Storage Temperature($^{\circ}$ C)	-30~+85		
Weight(g)	2		

◆ Value applying rated voltage(2400Hz, 1/2 duty, square wave)

◇ Value applying(2400Hz, sine wave, measuring current 60 μ A)

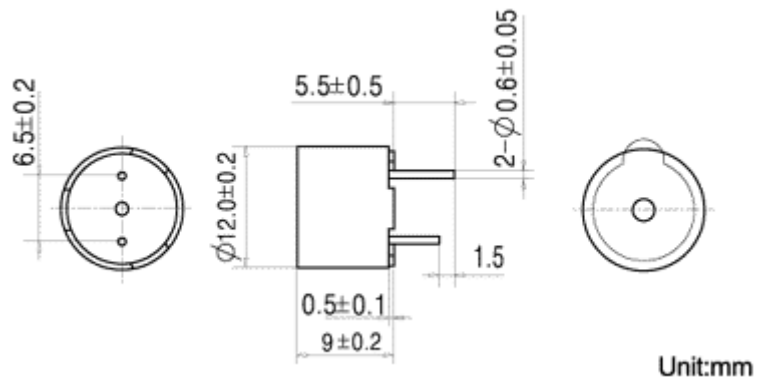

Applied voltage:6V, 1/2 duty, square wave
Distance for measurement:10cm