
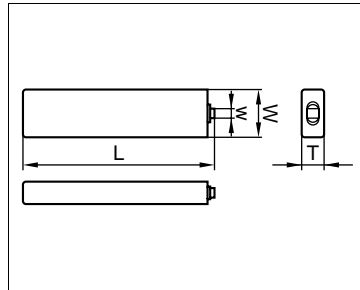


SANYO

Cadnica

Cell Type KF-A900

Specifications

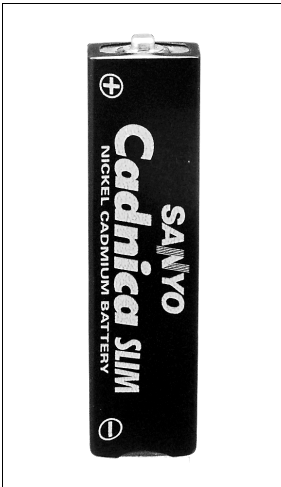


Dimensions of Bare Cell	Symbol	Value	
		mm	inch
L		66.3 ±0.3	
		2.610 ±0.012	
W		16.4 ±0.2	
		0.646 ±0.008	
T		7.8 ±0.2	
		0.307 ±0.008	
w		3.5	
		0.138	


Nominal Capacity		900mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	90mA	
	Fast	1350mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		13.0mΩ (at 1000Hz)	
Weight		30g/1.06oz	
Dimensions(D)×(H) (with tube)	(L)	67.0 ⁰ ₋₁ mm	2.64 ⁰ _{-0.04} inch
	(W)	17.2 ⁰ _{-0.8} mm	0.68 ⁰ _{-0.03} inch
	(T)	8.5 ⁰ _{-0.7} mm	0.33 ⁰ _{-0.03} inch

Typical Characteristics


Charge

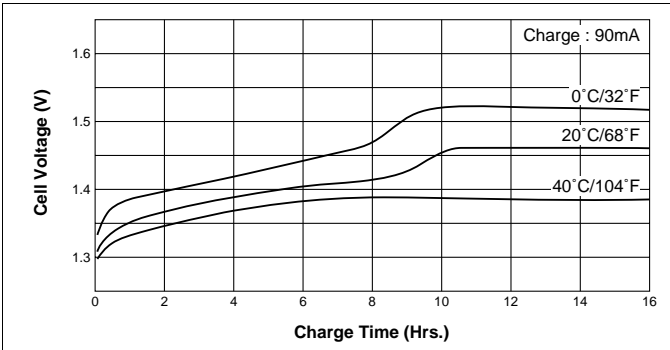


Discharge (at high rate)

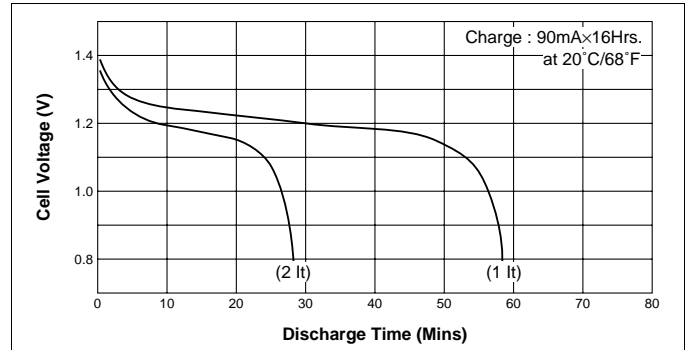


Charge

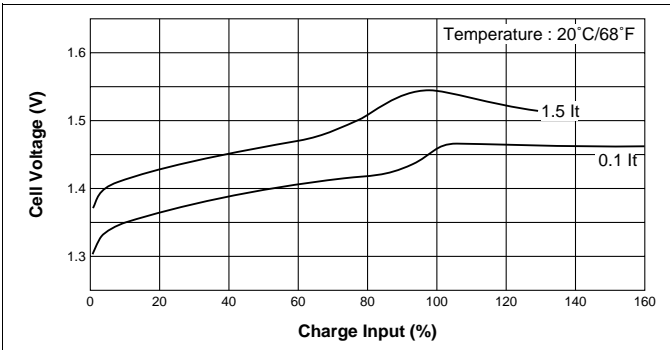

Discharge (at high rate)

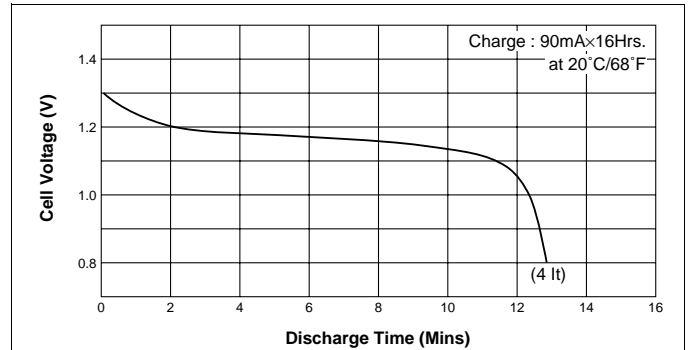

Discharge (at low rate)

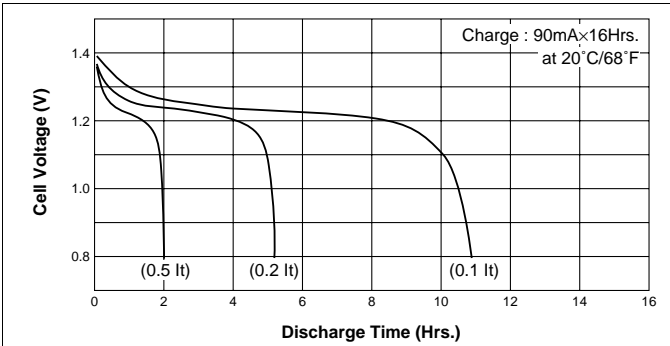

Temperature (Charge & Discharge)

