




Metallized Polycarbonate Capacitors

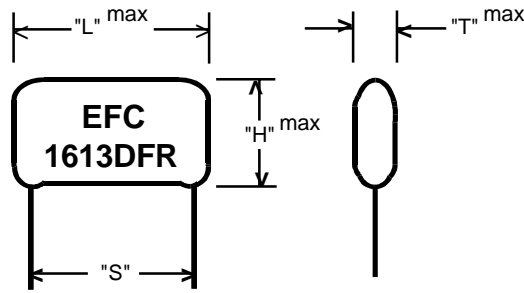

(All dimensions in millimeters)

1613DFR

www.DataSheet4U.com

Epoxy Dipped (Radial Leads)

Lead Specs. - Tinned Copperweld

L	S	DIA.
10.0	7.5	0.6
12.5	10.0	0.6
18.0	15.0	0.8
26.0	22.5	0.8
31.0	27.5	0.8

DIMENSIONS and RATINGS

Cap.	1613DFR-3 63 VDC			1613DFR-3 100 VDC			1613DFR-3 250 VDC			1613DFR-3 400 VDC			1613DFR-3 630 VDC				
	μF	T	H	L	T	H	L	T	H	L	T	H	L	T	H		
.001	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0		
.0012	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0		
.0015	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0		
.0022	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0		
.0027	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0		
.0039	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0		
.0047	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	12.5		
.0056	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	12.5		
.0068	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0	4.5	9.0	12.5		
.0082	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0	4.5	9.0	12.5		
.01	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	10.0	5.0	9.5	12.5		
.012	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	10.0	5.5	10.5	12.5		
.015	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0	4.5	9.0	12.5	6.0	11.0	12.5		
.018	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0	4.5	9.0	12.5	6.0	11.0	18.0		
.022	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0	4.5	9.0	12.5	6.0	12.0	18.0		
.027	4.0	8.0	10.0	4.0	8.0	10.0	4.5	8.5	10.0	5.0	9.5	12.5	6.5	12.5	18.0		
.033	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	10.0	5.5	10.5	12.5	7.0	13.0	18.0		
.039	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	12.5	6.0	11.0	12.5	7.5	13.5	18.0		
.047	4.0	8.0	10.0	4.0	8.0	10.0	5.0	9.5	12.5	6.5	12.0	12.5	8.0	14.5	18.0		
.056	4.0	8.0	10.0	4.0	8.0	10.0	5.0	10.0	12.5	5.0	10.0	18.0	8.0	15.0	18.0		
.068	4.0	8.0	10.0	4.5	8.5	10.0	5.5	10.5	12.5	5.5	10.5	18.0	8.5	15.5	18.0		
.082	4.0	8.0	10.0	4.5	9.0	10.0	6.0	11.0	12.5	6.0	11.0	18.0	8.5	15.5	26.0		
.1	4.0	8.0	10.0	4.5	9.0	12.5	5.5	10.5	18.0	6.0	12.0	18.0	8.5	16.0	26.0		
.12	4.0	8.0	10.0	4.5	9.5	12.5	6.0	12.0	18.0	6.5	12.5	18.0	9.0	16.5	26.0		
.15	4.0	8.0	10.0	5.0	10.0	12.5	6.5	12.5	18.0	7.5	13.5	18.0	9.5	17.0	26.0		
.18	4.0	8.0	10.0	5.5	10.5	12.5	7.0	13.0	18.0	8.5	15.5	18.0	9.0	16.5	31.0		
.22	4.0	8.5	12.5	6.0	11.0	12.5	7.5	13.5	18.0	7.5	13.5	26.0	9.5	18.0	31.0		
.27	4.5	8.5	12.5	5.5	10.5	18.0	8.0	14.0	18.0	8.5	15.5	26.0	10.0	19.0	31.0		
.33	4.5	9.0	12.5	5.5	11.0	18.0	8.5	15.5	18.0	9.0	16.0	26.0	11.5	20.5	31.0		
.39	5.0	9.5	12.5	6.0	12.0	18.0	7.5	13.5	26.0	9.5	17.0	26.0	12.0	21.0	31.0		
.47	5.5	10.0	12.5	7.0	13.0	18.0	8.0	15.0	26.0	10.0	19.0	26.0	13.0	23.0	31.0		
.56	5.5	10.5	12.5	7.5	14.0	18.0	8.5	16.0	26.0	9.5	17.0	31.0	13.5	25.0	31.0		
.68	6.0	11.0	12.5	8.0	15.0	18.0	9.5	17.0	26.0	10.5	20.0	31.0	15.0	27.0	31.0		

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705
 Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659