

### HIGH DENSITY, HIGH VOLTAGE, STANDARD RECOVERY RECTIFIER ASSEMBLY

### QUICK REFERENCE DATA


- Low reverse leakage current
- Low distributed and ground capacitance
- Corona free design
- Easy aluminium base mount
- Low forward voltage drop

- $V_R = 5kV - 15kV$
- $I_F = 1A$
- $t_{rr} = 2.0\mu S$
- $I_R = 1.0\mu A$

### ABSOLUTE MAXIMUM RATINGS

	Symbol	SDH5KM	SDH10KM	SDH15KM	Unit
Working reverse voltage	$V_{RWM}$	5.0	10.0	15.0	kV
Surge reverse voltage	$V_{RSM}$	5.5	11.0	16.5	kV
Average forward current in air @ 25°C in oil @ 55°C	$I_{F(AV)}$	← 1.0 →	← 1.0 →	← 1.0 →	A
Non-repetitive surge current $t_p = 8.3mS, @ 25°C$	$I_{FSM}$	← 50 →	← 50 →	← 50 →	A
Storage temperature range	$T_{STG}$	← -55 to +150 →	← -55 to +150 →	← -55 to +150 →	°C
Operating temperature range	$T_{OP}$	← -55 to +150 →	← -55 to +150 →	← -55 to +150 →	°C
Body length ±0.030"	dim C	3.36	4.04	4.04	inches

### MECHANICAL

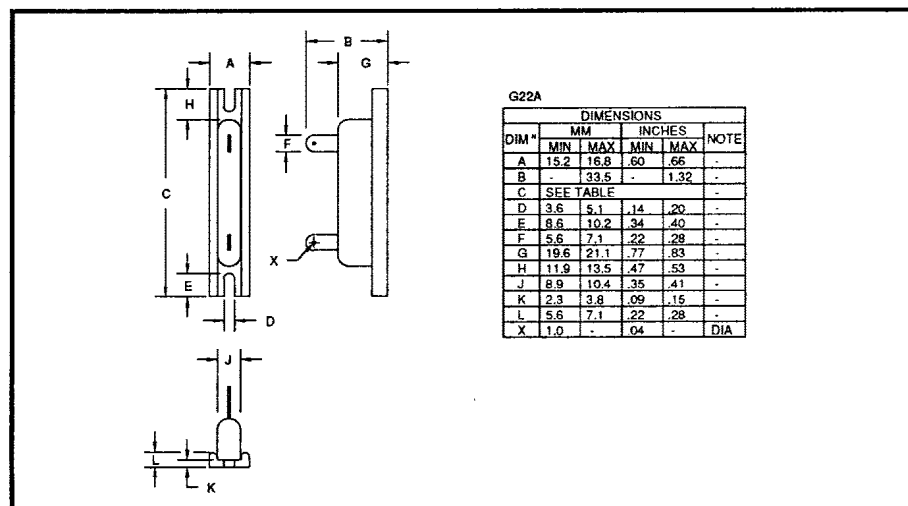


January 9, 1998

### ELECTRICAL CHARACTERISTICS

	Symbol	SDH5KM	SDH10KM	SDH15KM	Unit
Max. forward voltage drop @ $I_F = 1.0A$ , $T_j = 25^\circ C$	$V_F$	6.6	13.2	19.8	V
Max. reverse leakage current @ $V_{RWM}$ , $T_j = 25^\circ C$	$I_R$	←—————→	1.0	—————→	$\mu A$
@ $V_{RWM}$ , $T_j = 100^\circ C$	$I_R$	←—————→	25	—————→	$\mu A$
Max. reverse recovery time <sup>1</sup> 0.5A $I_F$ to 1.0A $I_R$ . Recovers to 0.25A $I_{RR}$ .	$t_{rr}$	←—————→	2.0	—————→	$\mu S$
Max. fusing current $t_p = 8.3mS$	$I^2t$	←—————→	10	—————→	$A^2S$

<sup>1</sup> Measured on discrete devices prior to assembly

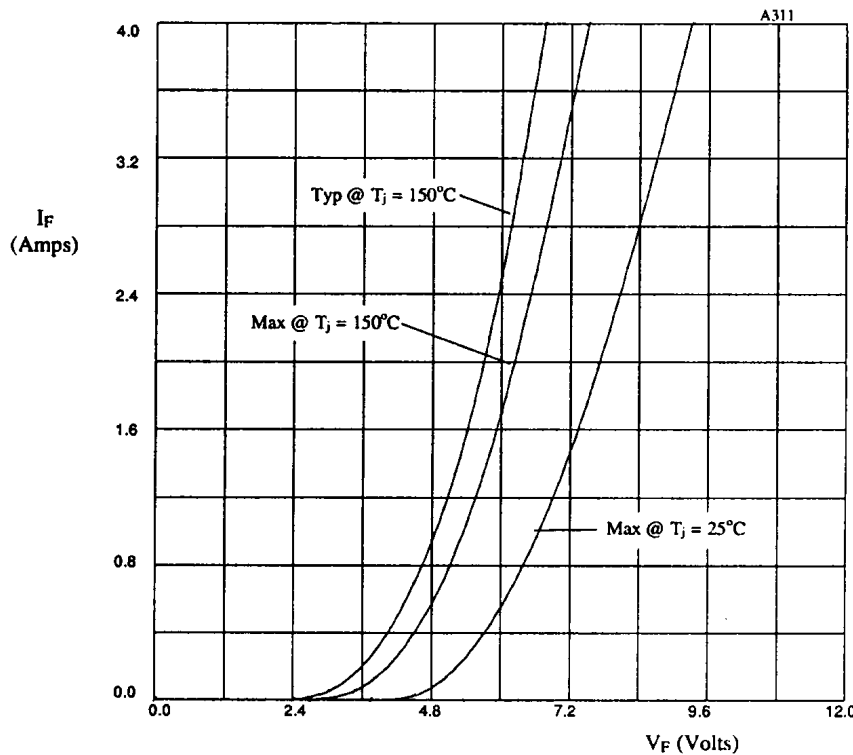

Multiplication tables for fig 1.

SDH5KM X-axis x1  
SDH10KM X-axis x2  
SDH15KM X-axis x3

Fig 1. Forward voltage drop as a function of forward current for use with multiplication table 1.