

AUDIO CABLE - GAC-1

PRODUCT
SPECIFICATION

Sheet No. PS 0003

Date : 25.11.93


Issue No. 4

Sheet 1 of 1

Signature

| | | |
|------------------|----------|--------|
| Deltron Part No. | 438-0100 | BLACK |
| | 438-0200 | BLUE |
| | 438-0500 | RED |
| | 438-0700 | YELLOW |

Dimensions

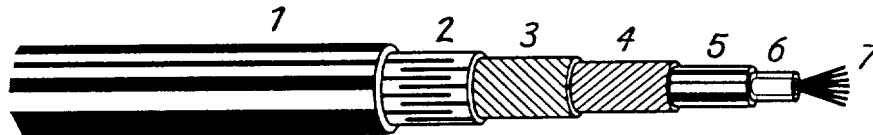

- | | |
|--------------------------|--|
| 1 - JACKET | PVC, Ø5,3mm (imprinting: Gotham GAC-1 / unbalanced) |
| 2 - VISCOSE SEPARATION | |
| 3 - SHIELD NO. 1 | Bare copper wire (0,10mm) |
| 4 - SHIELD NO. 2 | Bare copper wire (0,10mm) |
| 5 - CONDUCTIVE PVC LAYER | |
| 6 - INSULATION (COND.) | PE insulation, Ø1,25mm |
| 7 - CONDUCTOR | Bare copper wires 48 x 0,07mm (0,19mm ²) |

Description

Professional very low noise audio cable. Specially designed for instruments and other unbalanced lines where high RF protection and very low noise are desired. Double reussen shielding and very high flexible PVC material in combination with unique construction are the topics of this product. The conductive PVC layer will save from motion generated (static) noise.

Features

TECHNICAL SPECIFICATION

| | |
|----------------------|---------------------------|
| Conductor resistance | $\leq 110 \text{ Ohm/km}$ |
| Shielding resistance | $\leq 28 \text{ Ohm/km}$ |
| Capacitance | $\leq 160 \text{ nF/km}$ |
| Test Voltage | 1000 Veff (2 mins) |

ORDERING DATA

| | |
|--------------|------------------------------|
| Colours | black, blue, red, and yellow |
| Reels at | 100m EW250 |
| Weight/reel | 4,150 kg |
| Weight/metre | 0,038 kg |