




9.6x9.6 Square/ Single Turn /Trimming Potentiometer

-- 3386W--

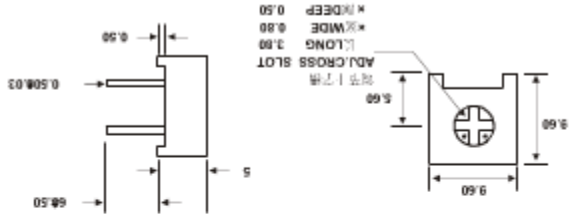

..... Mutual dimension.....



Standard Resistance Table

Resistance (Ohms) Resistance Code

10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Special resistances available

Environmental Characteristics	
Insulation Resistance.....	$R1 \geq 1G\Omega$
(100Vac)	
Withstand Voltage.....	600Vac
Effective Travel.....	300°
Electrical Characteristics	
Standard Resistance Range.....	50Ω ~ 2MΩ
Resistance Tolerance.....	±10%
Absolute Minimum Resistance.....	$\leq 1\%R$ 或 10Ω
Contact Resistance Variation.....	CRV ≤ 3%
Insulation Resistance.....	$R1 \geq 1G\Omega$
(100Vac)	
Withstand Voltage.....	600Vac
Effective Travel.....	300°
Physical Characteristics	
Temperature Range.....	-55°C ~ 125°C
Temperature Coefficient.....	±250ppm/°C
Temperature Variation.....	55°C, 30min, +125°C
.....	30min
5cycles	
.....	$\Delta R \leq 5\%R, \Delta(Uab/Uac) \leq 10\%$
Collision.....	100m/s ² , 1000cycles, $\Delta R \leq 2\%R$
.....	70°C.....0.5W@70°C
Electrical Endurance at	
.....	1000h, $\Delta R \leq 10\%R$
.....	$\Delta(Uab/Uac) \leq 10\%, CRV \leq 3\%$ or 5Ω
Rotational	
Life.....	200cycles
.....	$\Delta R \leq 10\%R, CRV \leq 3\%$ or 5Ω

How To Order

