

# OKI electronic components

## OCS37

### Optical PNPN Switches

#### GENERAL DESCRIPTION

The OCS37 is an optical PNPN switch, combining an infrared light emitting diode and PNPN elements (phototyristors) in a two-channel configuration. Encased in a 8-pin plastic package, the device is capable of withstanding high voltages.

The OCS37 consists of two output PNPN elements (bidirectional circuits), which are housed in a single package. Each of the two elements can be controlled independently.

#### FEATURES


- Forward blocking voltage ( $V_{BO}$ ): 320 V (Min.)
- Trigger input current ( $I_{GO}$ ): 11 mA (Max.)

#### APPLICATIONS


- Electronic automatic exchange
- Key telephone system
- Contactless switch
- Optically coupled circuits

#### PIN CONFIGURATION

(Unit: mm)

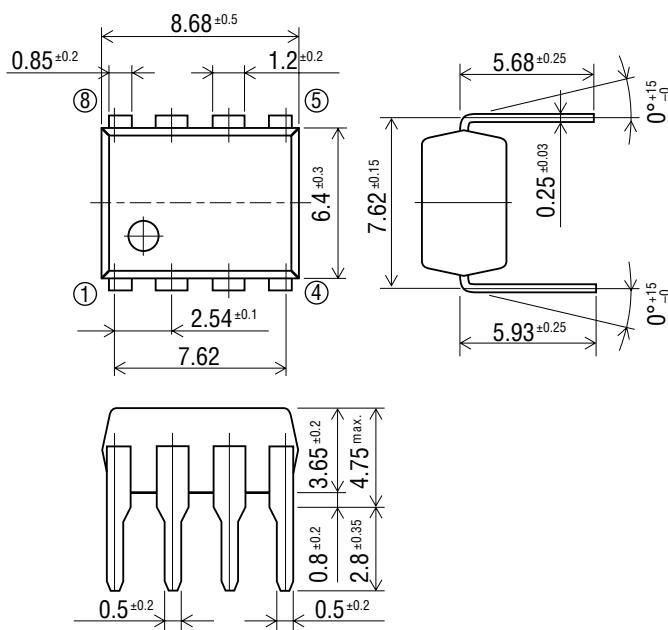

#### Pin Connection Diagram



- 1: Anode (LED)
- 2: Cathode (LED)
- 3: Anode (LED)
- 4: Cathode (LED)
- 5: Output (PNPN)
- 6: Output (PNPN)
- 7: Output (PNPN)
- 8: Output (PNPN)

## ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Test Condition	Rating	Unit
Input (LED)	Forward Current	I <sub>G</sub>	Ta=25°C	60	mA
	Reverse Voltage	V <sub>RL</sub>		5	V
Output (PNPN)	Forward Blocking Voltage	V <sub>BO</sub>	Ta=25°C	350	V
	Continuous ON-State Current	I <sub>F</sub>		100	mA
	Surge ON-State Current *	I <sub>SUG</sub>		1.4	A
Isolation Voltage		V <sub>I-0</sub>		1500	V
Operating Temperature		T <sub>opr</sub>	—	-20 to +70	°C
Storage Temperature		T <sub>stg</sub>	—	-30 to +100	°C

\* A single 1 ms pulse



## ELECTRICAL CHARACTERISTICS

(Ambient Temperature Ta=25°C)


Parameter		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Characteristics	Forward Voltage	V <sub>FL</sub>	I <sub>G</sub> =40 mA	—	—	1.4	V
	Reverse Current	I <sub>RL</sub>	V <sub>RL</sub> =5 V	—	—	5	μA
Output Characteristics	OFF-State Current	I <sub>BO</sub>	V <sub>AK</sub> =320 V	—	—	5	μA
	ON-State Voltage	V <sub>F</sub>	I <sub>F</sub> =20 mA, I <sub>G</sub> =40 mA	—	—	1.3	V
	dV/dt Capability	dV/dt	dt=0.1 μs	120	—	—	V/0.1μs
	Holding Current	I <sub>H</sub>	ON to OFF	—	—	1.3	mA
Coupled Characteristics	Trigger Input Current	I <sub>GO</sub>	V <sub>AK</sub> =50 VDC	—	—	11	mA

## TYPICAL CHARACTERISTICS


- Continuous ON-State Current vs. ON-State Voltage (Ta=25°C)
- Trigger Input Current vs. Ambient Temperature

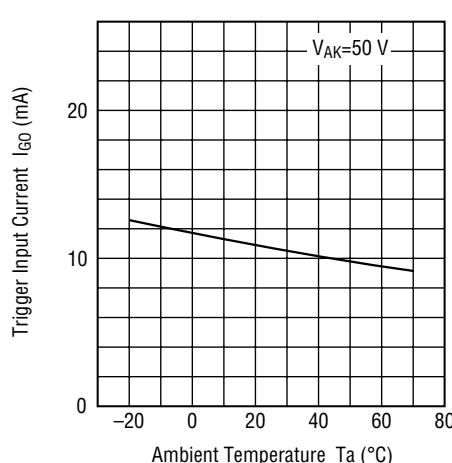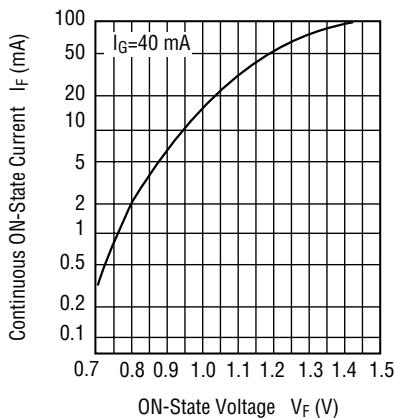


- Trigger Input Current vs. Anode-Cathode Voltage ( $T_a=25^\circ\text{C}$ )

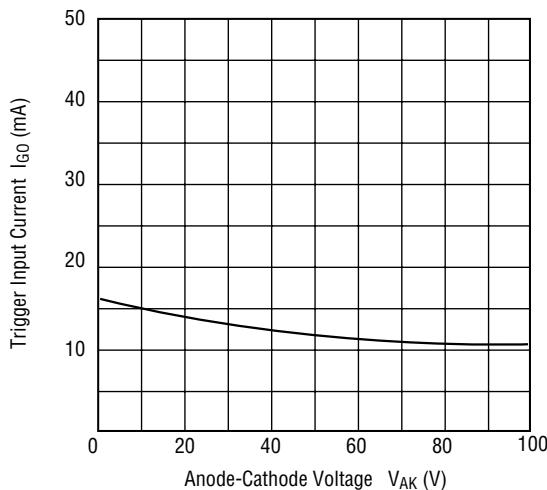

- Trigger Input Current vs. Drive Pulse Width ( $T_a=25^\circ\text{C}$ )

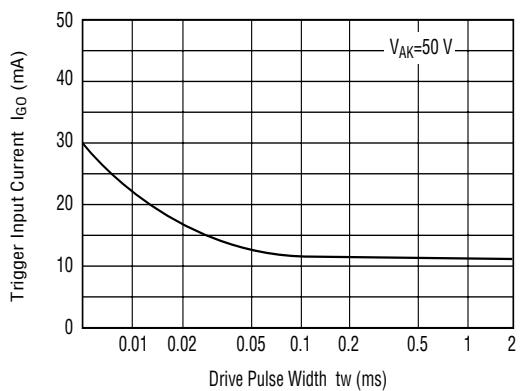

- Turn-On Time vs. LED Forward Current ( $T_a=25^\circ\text{C}$ )

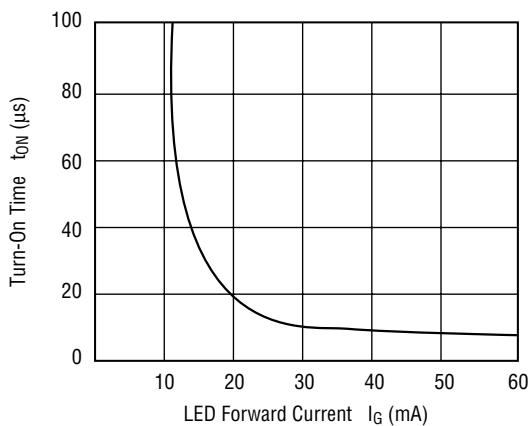

- dV/dt Capability vs. Ambient Temperature

