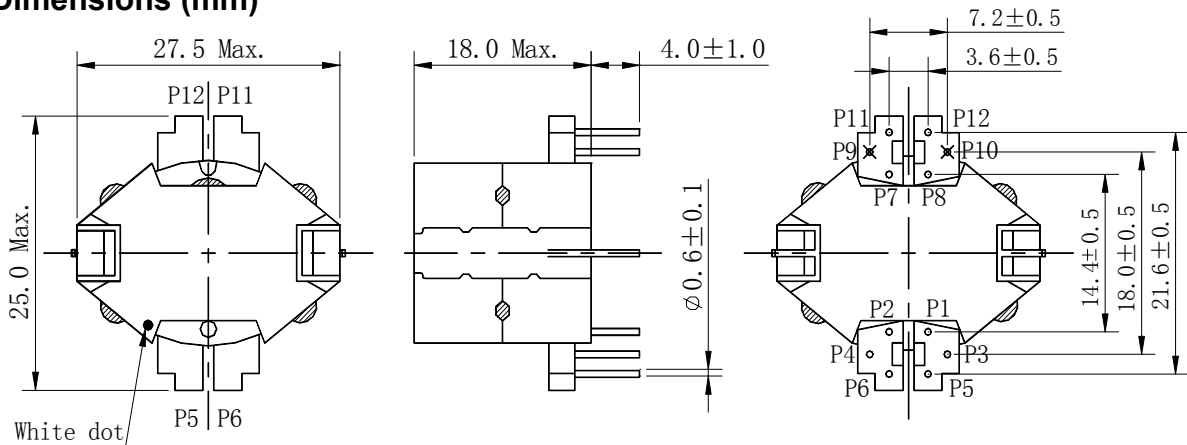
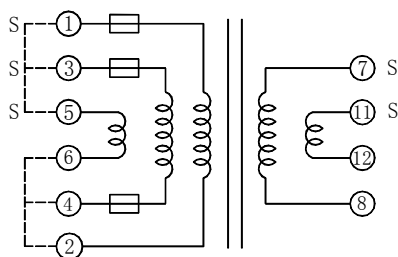


**Type: RM8/MS**
**◆ Product Description**


- 27.5×25.0mm Max.(L×W), 18.0mmMax. (Height)
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.


**◆ Feature**

- Max. Operating frequency 500kHz,Max. Operating Power 20.0W(300kHz).
- Ideally used as automotive HID transformer.
- RoHS Compliance

**◆ Dimensions (mm)**

**◆ Schematics (Bottom)**

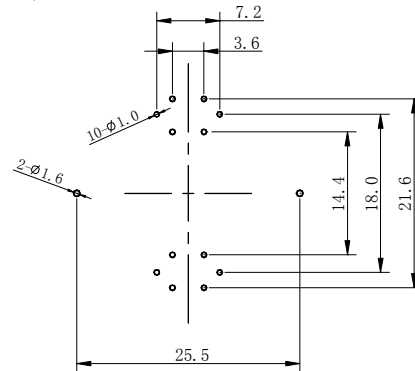
“S” indicates winding start.

**◆ Land Pattern**

**◆ Specification**

Sample No.	Inductance (11-12) 1kHz/0.25V	D.C.R. (11-12) Max.	D.C.R. (1,3,5-2,4,6) Max.	Hi-pot (1,3,5,2,4,6-7,8,11,12)
PS06-030	103 μ H ± 10%	420m Ω	6.0m Ω	DC500V/1min.(5mA)