

MOS INTEGRATED CIRCUIT

μ PD42S18165, 4218165

16 M-BIT DYNAMIC RAM

1 M-WORD BY 16-BIT, EDO, BYTE READ/WRITE MODE

Description

The μ PD42S18165, 4218165 are 1,048,576 words by 16 bits CMOS dynamic RAMs with optional EDO.

EDO is a kind of the page mode and is useful for the read operation.

Besides, the μ PD42S18165 can execute $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh.

The μ PD42S18165, 4218165 are packaged in 50-pin plastic TSOP (II) and 42-pin plastic SOJ.

Features

- EDO (Hyper page mode)
- 1,048,576 words by 16 bits organization
- Single +5.0 V $\pm$ 10 % power supply
- Fast access and cycle time

Part number	Power consumption Active (MAX.)	Access time (MAX.)	R/W cycle time (MIN.)	EDO (Hyper page mode) cycle time (MIN.)
μ PD42S18165-50, 4218165-50	935 mW	50 ns	84 ns	20 ns
μ PD42S18165-60, 4218165-60	880 mW	60 ns	104 ns	25 ns
μ PD42S18165-70, 4218165-70	825 mW	70 ns	124 ns	30 ns

- The μ PD42S18165 can execute $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh

Part number	Refresh cycle	Refresh	Power consumption at standby (MAX.)
μ PD42S18165	1,024 cycles/128 ms	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ only refresh, Hidden refresh	1.4 mW (CMOS level input)
μ PD4218165	1,024 cycles/16 ms	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ only refresh, Hidden refresh	5.5 mW (CMOS level input)


The information in this document is subject to change without notice.

Ordering Information


Part number	Access time (MAX.)	Package	Refresh
μ PD42S18165G5-50-7JF	50 ns	50-pin plastic TSOP (II) (400 mil)	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh $\overline{\text{RAS}}$ only refresh Hidden refresh
μ PD42S18165G5-60-7JF	60 ns		
μ PD42S18165G5-70-7JF	70 ns		
μ PD42S18165LE-50	50 ns	42-pin plastic SOJ (400 mil)	
μ PD42S18165LE-60	60 ns		
μ PD42S18165LE-70	70 ns		
μ PD4218165G5-50-7JF	50 ns	50-pin plastic TSOP (II) (400 mil)	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh $\overline{\text{RAS}}$ only refresh Hidden refresh
μ PD4218165G5-60-7JF	60 ns		
μ PD4218165G5-70-7JF	70 ns		
μ PD4218165LE-50	50 ns	42-pin plastic SOJ (400 mil)	
μ PD4218165LE-60	60 ns		
μ PD4218165LE-70	70 ns		

Pin Configurations (Marking Side)

50-pin Plastic TSOP (II) (400 mil)

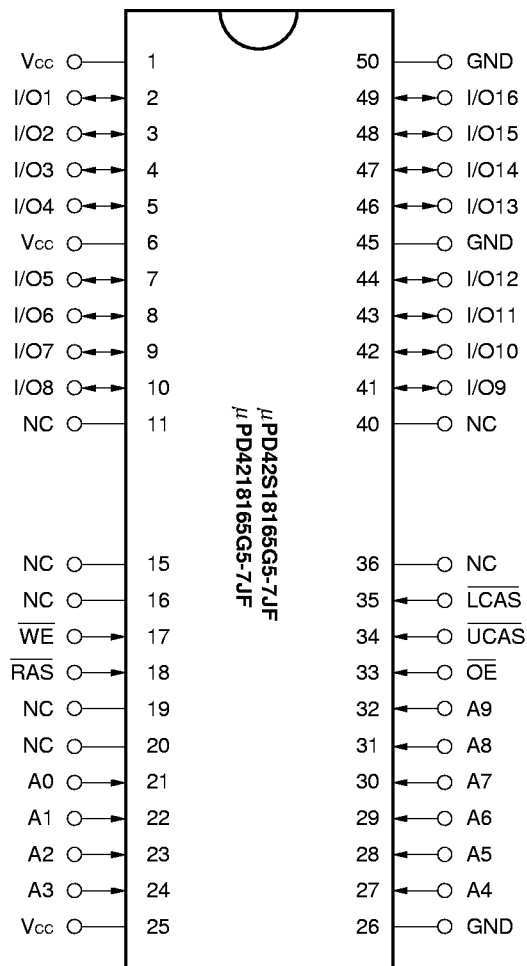


42-pin Plastic SOJ (400 mil)

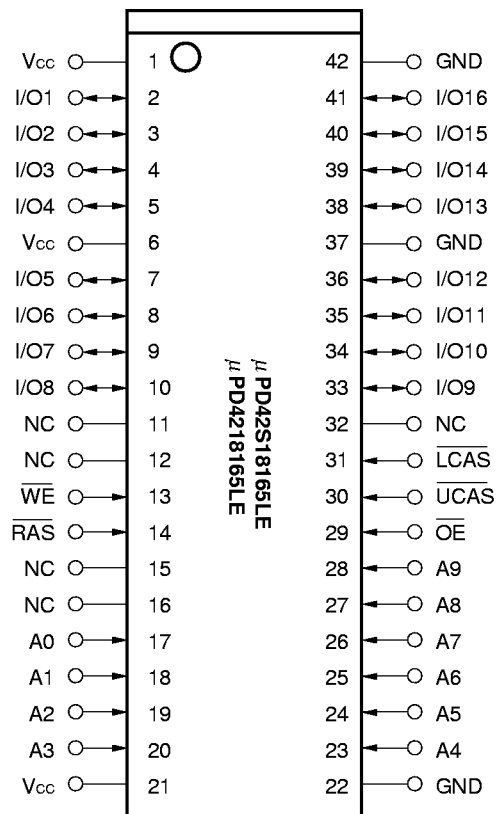

- A0 to A9 : Address Inputs
 I/O1 to I/O16 : Data Inputs/Outputs
 $\overline{\text{RAS}}$: Row Address Strobe
 $\overline{\text{UCAS}}$: Column Address Strobe (upper)
 $\overline{\text{LCAS}}$: Column Address Strobe (lower)
 $\overline{\text{WE}}$: Write Enable
 $\overline{\text{OE}}$: Output Enable
 Vcc : Power Supply
 GND : Ground
 NC : No Connection

Block Diagram

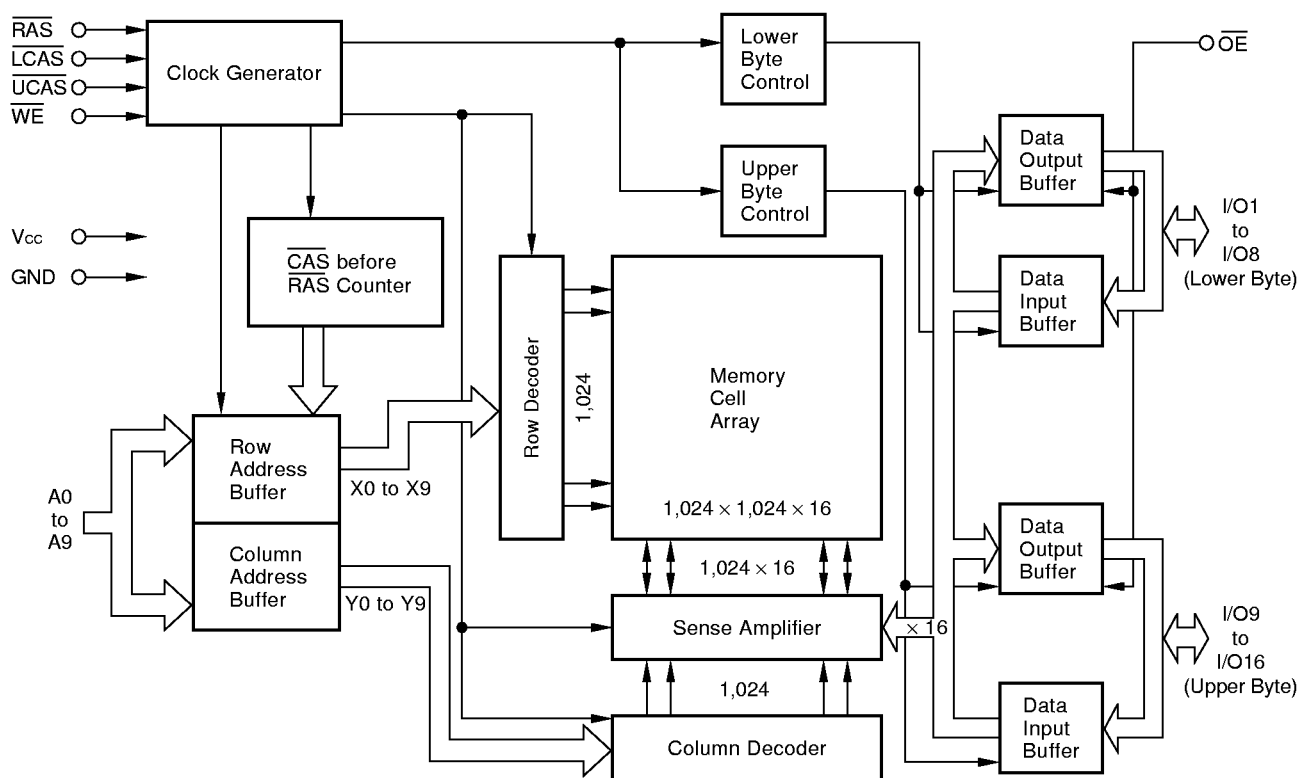

Input/Output Pin Functions

The μ PD42S18165, 4218165 have input pins $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ ^{Note}, $\overline{\text{WE}}$, $\overline{\text{OE}}$, A0 to A9 and input/output pins I/O1 to I/O16.

Pin name	Input/Output	Function
$\overline{\text{RAS}}$ (Row address strobe)	Input	$\overline{\text{RAS}}$ activates the sense amplifier by latching a row address and selecting a corresponding word line. It refreshes memory cell array of one line selected by the row address. It also selects the following function. $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh
$\overline{\text{CAS}}$ (Column address strobe)		$\overline{\text{CAS}}$ activates data input/output circuit by latching column address and selecting a digit line connected with the sense amplifier.
A0 to A9 (Address inputs)		Address bus. Input total 20-bit of address signal, upper 10-bit and lower 10-bit in sequence (address multiplex method). Therefore, one word is selected from 1,048,576-word by 16-bit memory cell array. In actual operation, latch row address by specifying row address and activating $\overline{\text{RAS}}$. Then, switch the address bus to column address and activate $\overline{\text{CAS}}$. Each address is taken into the device when $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are activated. Therefore, the address input setup time (t_{ASR} , t_{ASC}) and hold time (t_{RAH} , t_{CAH}) are specified for the activation of $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$.
$\overline{\text{WE}}$ (Write enable)		Write control signal. Write operation is executed by activating $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ and $\overline{\text{WE}}$.
$\overline{\text{OE}}$ (Output enable)		Read control signal. Read operation can be executed by activating $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ and $\overline{\text{OE}}$. If $\overline{\text{WE}}$ is activated during read operation, $\overline{\text{OE}}$ is to be ineffective in the device. Therefore, read operation cannot be executed.
I/O1 to I/O16 (Data inputs/outputs)	Input/Output	16-bit data bus. I/O1 to I/O16 are used to input/output data.

Note $\overline{\text{CAS}}$ means $\overline{\text{UCAS}}$ and $\overline{\text{LCAS}}$.

★ Hyper Page Mode (EDO)

The hyper page mode (EDO) is a kind of page mode with enhanced features. The two major features of the hyper page mode (EDO) are as follows.

1. Data output time is extended.

In the hyper page mode (EDO), the output data is held to the next $\overline{\text{CAS}}$ cycle's falling edge, instead of the rising edge. For this reason, valid data output time in the hyper page mode (EDO) is extended compared with the fast page mode (= data extend function). In the fast page mode, the data output time becomes shorter as the $\overline{\text{CAS}}$ cycle time becomes shorter. Therefore, in the hyper page mode (EDO), the timing margin in read cycle is larger than that of the fast page mode even if the $\overline{\text{CAS}}$ cycle time becomes shorter.

2. The $\overline{\text{CAS}}$ cycle time in the hyper page mode (EDO) is shorter than that in the fast page mode.


In the hyper page mode (EDO), due to the data extend function, the $\overline{\text{CAS}}$ cycle time can be shorter than in the fast page mode if the timing margin is the same.

Taking a device whose t_{RAC} is 60 ns as an example, the $\overline{\text{CAS}}$ cycle time in the fast page mode is 25 ns while that in the fast page mode is 40 ns.

In the hyper page mode (EDO), read (data out) and write (data in) cycles can be executed repeatedly during one $\overline{\text{RAS}}$ cycle. The hyper page mode (EDO) allows both read and write operations during one cycle.

The following shows a part of the hyper page mode (EDO) read cycle. Specifications to be observed are described in the next page.

Hyper Page Mode (EDO) Read Cycle

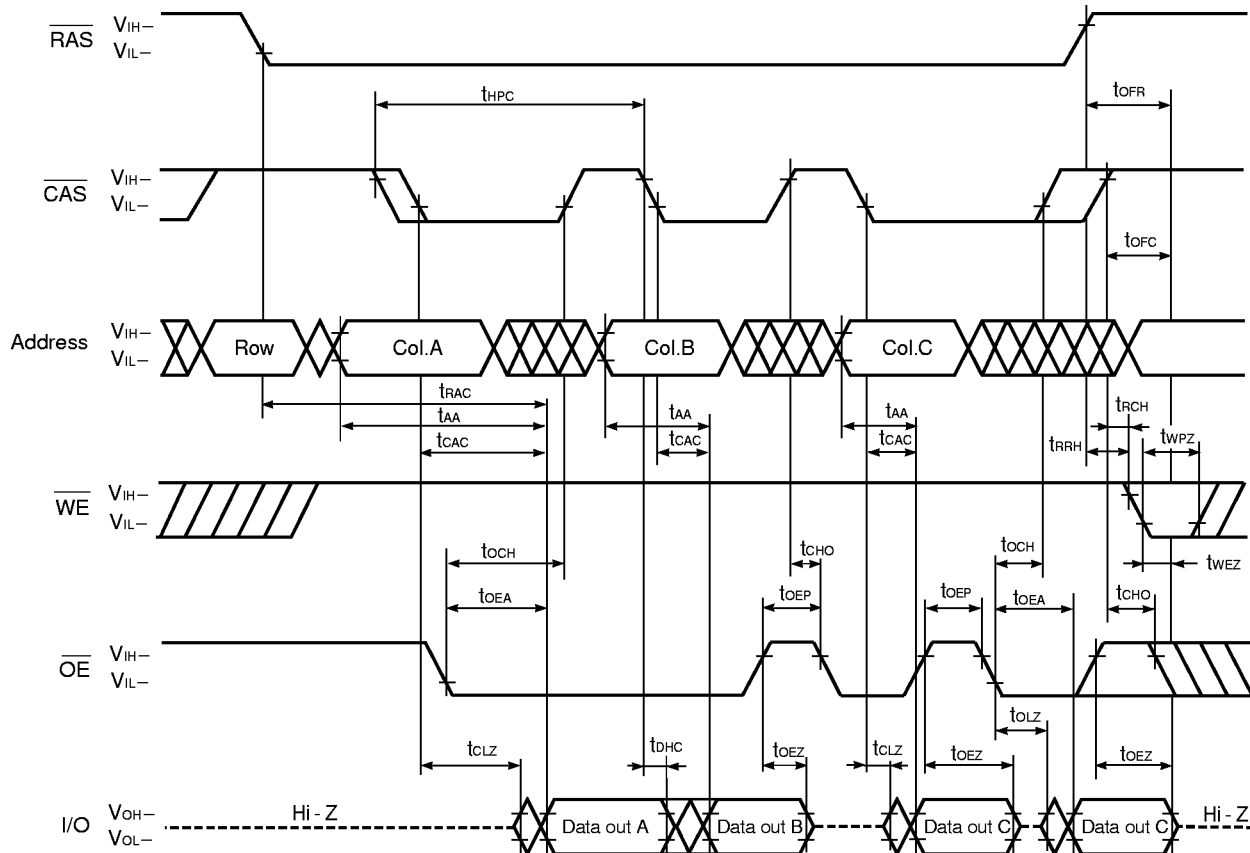

Cautions when using the hyper page mode (EDO)

1. $\overline{\text{CAS}}$ access should be used to operate t_{HPC} at the MIN. value.
2. To make I/Os to Hi-Z in read cycle, it is necessary to control $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$ as follows. The effective specification depends on the state of each signal.
 - (1) Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are inactive (at the end of read cycle)

$\overline{\text{WE}}$: inactive, $\overline{\text{OE}}$: active

t_{OFC} is effective when $\overline{\text{RAS}}$ is inactivated before $\overline{\text{CAS}}$ is inactivated.

t_{OFR} is effective when $\overline{\text{CAS}}$ is inactivated before $\overline{\text{RAS}}$ is inactivated.

The slower of t_{OFC} and t_{OFR} becomes effective.
 - (2) Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are active or either $\overline{\text{RAS}}$ or $\overline{\text{CAS}}$ is active (in read cycle)

$\overline{\text{WE}}$, $\overline{\text{OE}}$: inactive t_{OEZ} is effective.

Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are inactive or $\overline{\text{RAS}}$ is active and $\overline{\text{CAS}}$ is inactive (at the end of read cycle)

$\overline{\text{WE}}$, $\overline{\text{OE}}$: active and either t_{RRH} or t_{RCH} must be met t_{WEZ} and t_{WPZ} are effective.

The faster of t_{OEZ} and t_{WEZ} becomes effective.

The faster of (1) and (2) becomes effective.
3. In read cycle, the effective specification depends on the state of $\overline{\text{CAS}}$ signal when controlling data output with the $\overline{\text{OE}}$ signal.
 - (1) $\overline{\text{CAS}}$: inactive, $\overline{\text{OE}}$: active t_{CHO} is effective.
 - (2) $\overline{\text{CAS}}$, $\overline{\text{OE}}$: active t_{CH} is effective.

Electrical Specifications

- $\overline{\text{CAS}}$ means $\overline{\text{UCAS}}$ and $\overline{\text{LCAS}}$.
- All voltages are referenced to GND.
- After power up ($V_{CC} \geq V_{CC(MIN.)}$), wait more than 100 μs ($\overline{\text{RAS}}$, $\overline{\text{CAS}}$ inactive) and then, execute eight $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ or $\overline{\text{RAS}}$ only refresh cycles as dummy cycles to initialize internal circuit.

Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Voltage on any pin relative to GND	V_T		-1.0 to +7.0	V
Supply voltage	V_{CC}		-1.0 to +7.0	V
Output current	I_O		50	mA
Power dissipation	P_D		1	W
Operating ambient temperature	T_A		0 to +70	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-55 to +125	$^{\circ}\text{C}$

Caution Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply voltage	V_{CC}		4.5	5.0	5.5	V
High level input voltage	V_{IH}		2.4		$V_{CC} + 1.0$	V
Low level input voltage	V_{IL}		-1.0		+0.8	V
Operating ambient temperature	T_A		0		70	$^{\circ}\text{C}$

Capacitance ($T_A = 25^{\circ}\text{C}$, $f = 1\text{ MHz}$)

Parameter	Symbol	Test condition	MIN.	TYP.	MAX.	Unit
Input capacitance	C_{I1}	Address			5	pF
	C_{I2}	$\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$			7	
Data input/output capacitance	$C_{I/O}$	I/O			7	pF

DC Characteristics (Recommended operating conditions unless otherwise noted)


Parameter		Symbol	Test condition		MIN.	MAX.	Unit	Notes
Operating current		I _{CC1}	$\overline{\text{RAS}}, \overline{\text{CAS}}$ cycling $t_{\text{RC}} = t_{\text{RC (MIN.)}}, I_{\text{O}} = 0 \text{ mA}$	$t_{\text{RAC}} = 50 \text{ ns}$		170	mA	1, 2, 3
				$t_{\text{RAC}} = 60 \text{ ns}$		160		
				$t_{\text{RAC}} = 70 \text{ ns}$		150		
Standby current	$\mu\text{PD42S18165}$	I _{CC2}	$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{\text{IH (MIN.)}}, I_{\text{O}} = 0 \text{ mA}$			2.0	mA	
			$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{\text{CC}} - 0.2 \text{ V}, I_{\text{O}} = 0 \text{ mA}$			0.25		
	$\mu\text{PD4218165}$		$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{\text{IH (MIN.)}}, I_{\text{O}} = 0 \text{ mA}$			2.0		
			$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{\text{CC}} - 0.2 \text{ V}, I_{\text{O}} = 0 \text{ mA}$			1.0		
$\overline{\text{RAS}}$ only refresh current		I _{CC3}	$\overline{\text{RAS}}$ cycling, $\overline{\text{CAS}} \geq V_{\text{IH (MIN.)}}$ $t_{\text{RC}} = t_{\text{RC (MIN.)}}, I_{\text{O}} = 0 \text{ mA}$	$t_{\text{RAC}} = 50 \text{ ns}$		170	mA	1, 2, 3, 4
				$t_{\text{RAC}} = 60 \text{ ns}$		160		
				$t_{\text{RAC}} = 70 \text{ ns}$		150		
Operating current (Hyper page mode (EDO))		I _{CC4}	$\overline{\text{RAS}} \leq V_{\text{IL (MAX.)}}, \overline{\text{CAS}}$ cycling $t_{\text{HPC}} = t_{\text{HPC (MIN.)}}, I_{\text{O}} = 0 \text{ mA}$	$t_{\text{RAC}} = 50 \text{ ns}$		120	mA	1, 2, 5
				$t_{\text{RAC}} = 60 \text{ ns}$		110		
				$t_{\text{RAC}} = 70 \text{ ns}$		100		
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh current		I _{CC5}	$\overline{\text{RAS}}$ cycling $t_{\text{RC}} = t_{\text{RC (MIN.)}}, I_{\text{O}} = 0 \text{ mA}$	$t_{\text{RAC}} = 50 \text{ ns}$		170	mA	1, 2
				$t_{\text{RAC}} = 60 \text{ ns}$		160		
				$t_{\text{RAC}} = 70 \text{ ns}$		150		
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh current (1,024 cycles / 128 ms, only for the $\mu\text{PD42S18165}$)		I _{CC6}	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh : $t_{\text{RC}} = 125.0 \mu\text{s}$ $\overline{\text{RAS}}, \overline{\text{CAS}}$: $V_{\text{CC}} - 0.2 \text{ V} \leq V_{\text{IH}} \leq V_{\text{IH (MAX.)}}$ $0 \text{ V} \leq V_{\text{IL}} \leq 0.2 \text{ V}$ Standby: $\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{\text{CC}} - 0.2 \text{ V}$ Address: V_{IH} or V_{IL} $\overline{\text{WE}}, \overline{\text{OE}}$: V_{IH} $I_{\text{O}} = 0 \text{ mA}$	$t_{\text{RAS}} \leq 300 \text{ ns}$		350	μA	1, 2
				$t_{\text{RAS}} \leq 1 \mu\text{s}$		400	μA	1, 2
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh current (only for the $\mu\text{PD42S18165}$)		I _{CC7}	$\overline{\text{RAS}}, \overline{\text{CAS}}$: $t_{\text{RASS}} = 5 \text{ ms}$ $V_{\text{CC}} - 0.2 \text{ V} \leq V_{\text{IH}} \leq V_{\text{IH (MAX.)}}$ $0 \text{ V} \leq V_{\text{IL}} \leq 0.2 \text{ V}$ $I_{\text{O}} = 0 \text{ mA}$			250	μA	2
Input leakage current		I _{I (L)}	$V_{\text{I}} = 0 \text{ to } 5.5 \text{ V}$ All other pins not under test = 0 V		-10	+10	μA	
Output leakage current		I _{O (L)}	$V_{\text{O}} = 0 \text{ to } 5.5 \text{ V}$ Output is disabled (Hi-Z)		-10	+10	μA	
High level output voltage		V _{OH}	$I_{\text{O}} = -5.0 \text{ mA}$		2.4		V	
Low level output voltage		V _{OL}	$I_{\text{O}} = +4.2 \text{ mA}$			0.4	V	

- Notes 1.** I_{CC1}, I_{CC3}, I_{CC4}, I_{CC5} and I_{CC6} depend on cycle rates (t_{RC} and t_{HPC}).
- 2.** Specified values are obtained with outputs unloaded.
- 3.** I_{CC1} and I_{CC3} are measured assuming that address can be changed once or less during $\overline{\text{RAS}} \leq V_{\text{IL (MAX.)}}$ and $\overline{\text{CAS}} \geq V_{\text{IH (MIN.)}}$.
- 4.** I_{CC3} is measured assuming that all column address inputs are held at either high or low.
- 5.** I_{CC4} is measured assuming that all column address inputs are switched only once during each hyper page (EDO) cycle.

AC Characteristics (Recommended Operating Conditions unless otherwise noted)


AC Characteristics Test Conditions

(1) Input timing specification

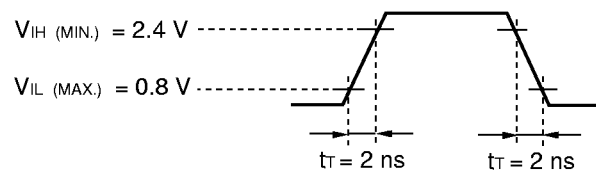


★ (2) Output timing specification


- μPD42S18165-50, 4218165-50



- μPD42S18165-60, 4218165-60
- μPD42S18165-70, 4218165-70



(3) Output loading conditions



Common to Read, Write, Read Modify Write Cycle

Parameter		Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Notes
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read / Write cycle time		t _{RC}	84	–	104	–	124	–	ns	
$\overline{\text{RAS}}$ precharge time		t _{RP}	30	–	40	–	50	–	ns	
$\overline{\text{CAS}}$ precharge time		t _{CPN}	8	–	10	–	10	–	ns	
$\overline{\text{RAS}}$ pulse width		t _{RAS}	50	10,000	60	10,000	70	10,000	ns	1
$\overline{\text{CAS}}$ pulse width		t _{CAS}	8	10,000	10	10,000	12	10,000	ns	
$\overline{\text{RAS}}$ hold time		t _{RSH}	10	–	10	–	12	–	ns	
$\overline{\text{CAS}}$ hold time		t _{CSH}	38	–	40	–	50	–	ns	
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time		t _{RCD}	11	37	14	45	14	52	ns	2
$\overline{\text{RAS}}$ to column address delay time		t _{RAD}	9	25	12	30	12	35	ns	2
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time		t _{CRP}	5	–	5	–	5	–	ns	3
Row address setup time		t _{ASR}	0	–	0	–	0	–	ns	
Row address hold time		t _{RAH}	7	–	10	–	10	–	ns	
Column address setup time		t _{ASC}	0	–	0	–	0	–	ns	
Column address hold time		t _{CAH}	7	–	10	–	12	–	ns	
$\overline{\text{OE}}$ lead time referenced to $\overline{\text{RAS}}$		t _{OES}	0	–	0	–	0	–	ns	
$\overline{\text{CAS}}$ to data setup time		t _{CLZ}	0	–	0	–	0	–	ns	
$\overline{\text{OE}}$ to data setup time		t _{OLZ}	0	–	0	–	0	–	ns	
$\overline{\text{OE}}$ to data delay time		t _{OED}	10	–	13	–	15	–	ns	
Masked byte write hold time referenced to $\overline{\text{RAS}}$		t _{MRH}	0	–	0	–	0	–	ns	
Transition time (rise and fall)		t _T	1	50	1	50	1	50	ns	
Refresh time	μPD42S18165	t _{REF}	–	128	–	128	–	128	ms	4
	μPD4218165		–	16	–	16	–	16	ms	

Notes 1. In $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles, $t_{\text{RAS}}(\text{MAX.})$ is 100 μs .

If 10 $\mu\text{s} < t_{\text{RAS}} < 100 \mu\text{s}$, $\overline{\text{RAS}}$ precharge time for $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh (t_{RPS}) is applied.

2. For read cycles, access time is defined as follows:

Input conditions	Access time	Access time from $\overline{\text{RAS}}$
$t_{\text{RAD}} \leq t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}} \leq t_{\text{RCD}}(\text{MAX.})$	$t_{\text{RAC}}(\text{MAX.})$	$t_{\text{RAC}}(\text{MAX.})$
$t_{\text{RAD}} > t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}} \leq t_{\text{RCD}}(\text{MAX.})$	$t_{\text{AA}}(\text{MAX.})$	$t_{\text{RAD}} + t_{\text{AA}}(\text{MAX.})$
$t_{\text{RCD}} > t_{\text{RCD}}(\text{MAX.})$	$t_{\text{CAC}}(\text{MAX.})$	$t_{\text{RCD}} + t_{\text{CAC}}(\text{MAX.})$

$t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}}(\text{MAX.})$ are specified as reference points only; they are not restrictive operating parameters. They are used to determine which access time (t_{RAC} , t_{AA} or t_{CAC}) is to be used for finding out when output data will be available. Therefore, the input conditions $t_{\text{RAD}} \geq t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}} \geq t_{\text{RCD}}(\text{MAX.})$ will not cause any operation problems.

3. $t_{\text{CRP}}(\text{MIN.})$ requirement is applied to $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ cycles.

4. This specification is applied only to the μ PD42S18165.

Read Cycle

Parameter	Symbol	$t_{RAC} = 50 \text{ ns}$		$t_{RAC} = 60 \text{ ns}$		$t_{RAC} = 70 \text{ ns}$		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Access time from $\overline{\text{RAS}}$	t_{RAC}	—	50	—	60	—	70	ns	1
Access time from $\overline{\text{CAS}}$	t_{CAC}	—	13	—	15	—	18	ns	1
Access time from column address	t_{AA}	—	25	—	30	—	35	ns	1
Access time from $\overline{\text{OE}}$	t_{OEA}	—	13	—	15	—	18	ns	
Column address lead time referenced to $\overline{\text{RAS}}$	t_{RAL}	25	—	30	—	35	—	ns	
Read command setup time	t_{RCS}	0	—	0	—	0	—	ns	
Read command hold time referenced to $\overline{\text{RAS}}$	t_{RRH}	0	—	0	—	0	—	ns	2
Read command hold time referenced to $\overline{\text{CAS}}$	t_{RCH}	0	—	0	—	0	—	ns	2
Output buffer turn-off delay time from $\overline{\text{OE}}$	t_{OEZ}	0	10	0	13	0	15	ns	3
$\overline{\text{CAS}}$ hold time to $\overline{\text{OE}}$	t_{CHO}	5	—	5	—	5	—	ns	4

Notes 1. For read cycles, access time is defined as follows:

Input conditions	Access time	Access time from $\overline{\text{RAS}}$
$t_{RAD} \leq t_{RAD}(\text{MAX.})$ and $t_{RCD} \leq t_{RCD}(\text{MAX.})$	$t_{RAC}(\text{MAX.})$	$t_{RAC}(\text{MAX.})$
$t_{RAD} > t_{RAD}(\text{MAX.})$ and $t_{RCD} \leq t_{RCD}(\text{MAX.})$	$t_{AA}(\text{MAX.})$	$t_{RAD} + t_{AA}(\text{MAX.})$
$t_{RCD} > t_{RCD}(\text{MAX.})$	$t_{CAC}(\text{MAX.})$	$t_{RCD} + t_{CAC}(\text{MAX.})$

$t_{RAD}(\text{MAX.})$ and $t_{RCD}(\text{MAX.})$ are specified as reference points only; they are not restrictive operating parameters. They are used to determine which access time (t_{RAC} , t_{AA} or t_{CAC}) is to be used for finding out when output data will be available. Therefore, the input conditions $t_{RAD} \geq t_{RAD}(\text{MAX.})$ and $t_{RCD} \geq t_{RCD}(\text{MAX.})$ will not cause any operation problems.

2. Either $t_{RCH}(\text{MIN.})$ or $t_{RRH}(\text{MIN.})$ should be met in read cycles.
3. $t_{OEZ}(\text{MAX.})$ defines the time when the output achieves the condition of Hi-Z and is not referenced to V_{OH} or V_{OL} .
4. $\overline{\text{WE}}$: inactive (in read cycle)
 $\overline{\text{CAS}}$: inactive, $\overline{\text{OE}}$: active t_{CHO} is effective.
 $\overline{\text{CAS}}$, $\overline{\text{OE}}$: active t_{OCH} is effective.

Write Cycle

Parameter	Symbol	$t_{\text{RAC}} = 50 \text{ ns}$		$t_{\text{RAC}} = 60 \text{ ns}$		$t_{\text{RAC}} = 70 \text{ ns}$		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
$\overline{\text{WE}}$ hold time referenced to $\overline{\text{CAS}}$	t_{WCH}	7	—	10	—	10	—	ns	1
$\overline{\text{WE}}$ pulse width	t_{WP}	8	—	10	—	10	—	ns	1
$\overline{\text{WE}}$ lead time referenced to $\overline{\text{RAS}}$	t_{RWL}	10	—	10	—	12	—	ns	
$\overline{\text{WE}}$ lead time referenced to $\overline{\text{CAS}}$	t_{CWL}	8	—	10	—	12	—	ns	
$\overline{\text{WE}}$ setup time	t_{WCS}	0	—	0	—	0	—	ns	2
$\overline{\text{OE}}$ hold time	t_{OEH}	0	—	0	—	0	—	ns	
Data-in setup time	t_{DS}	0	—	0	—	0	—	ns	3
Data-in hold time	t_{DH}	7	—	10	—	10	—	ns	3

- Notes**
1. $t_{\text{WP}} (\text{MIN.})$ is applied to late write cycles or read modify write cycles. In early write cycles, $t_{\text{WCH}} (\text{MIN.})$ should be met.
 2. If $t_{\text{WCS}} \geq t_{\text{WCS}} (\text{MIN.})$, the cycle is an early write cycle and the data out will remain Hi-Z through the entire cycle.
 3. $t_{\text{DS}} (\text{MIN.})$ and $t_{\text{DH}} (\text{MIN.})$ are referenced to the $\overline{\text{CAS}}$ falling edge in early write cycles. In late write cycles and read modify write cycles, they are referenced to the $\overline{\text{WE}}$ falling edge.

Read Modify Write Cycle

Parameter	Symbol	$t_{\text{RAC}} = 50 \text{ ns}$		$t_{\text{RAC}} = 60 \text{ ns}$		$t_{\text{RAC}} = 70 \text{ ns}$		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read modify write cycle time	t_{RWC}	107	—	133	—	157	—	ns	
$\overline{\text{RAS}}$ to $\overline{\text{WE}}$ delay time	t_{RWD}	64	—	77	—	89	—	ns	1
$\overline{\text{CAS}}$ to $\overline{\text{WE}}$ delay time	t_{CWD}	27	—	32	—	37	—	ns	1
Column address to $\overline{\text{WE}}$ delay time	t_{AWD}	39	—	47	—	54	—	ns	1

- Note**
1. If $t_{\text{WCS}} \geq t_{\text{WCS}} (\text{MIN.})$, the cycle is an early write cycle and the data out will remain Hi-Z through the entire cycle. If $t_{\text{RWD}} \geq t_{\text{RWD}} (\text{MIN.})$, $t_{\text{CWD}} \geq t_{\text{CWD}} (\text{MIN.})$, $t_{\text{AWD}} \geq t_{\text{AWD}} (\text{MIN.})$ and $t_{\text{CPWD}} \geq t_{\text{CPWD}} (\text{MIN.})$, the cycle is a read modify write cycle and the data out will contain data read from the selected cell. If neither of the above conditions is met, the state of the data out is indeterminate.

Hyper Page Mode (EDO)

Parameter	Symbol	$t_{RAC} = 50 \text{ ns}$		$t_{RAC} = 60 \text{ ns}$		$t_{RAC} = 70 \text{ ns}$		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read / Write cycle time	t_{HPC}	20	—	25	—	30	—	ns	1
$\overline{\text{RAS}}$ pulse width	t_{RASP}	50	125,000	60	125,000	70	125,000	ns	
★ $\overline{\text{CAS}}$ pulse width	t_{HCAS}	8	10,000	10	10,000	12	10,000	ns	
★ $\overline{\text{CAS}}$ precharge time	t_{CP}	8	—	10	—	10	—	ns	
Access time from $\overline{\text{CAS}}$ precharge	t_{ACP}	—	30	—	35	—	40	ns	
$\overline{\text{CAS}}$ precharge to $\overline{\text{WE}}$ delay time	t_{CPWD}	41	—	52	—	59	—	ns	2
$\overline{\text{RAS}}$ hold time from $\overline{\text{CAS}}$ precharge	t_{RHCP}	30	—	35	—	40	—	ns	
Read modify write cycle time	t_{HPRWC}	52	—	66	—	75	—	ns	
Data output hold time	t_{DHC}	5	—	5	—	5	—	ns	
$\overline{\text{OE}}$ to $\overline{\text{CAS}}$ hold time	t_{OCH}	5	—	5	—	5	—	ns	3
$\overline{\text{OE}}$ precharge time	t_{OEP}	5	—	5	—	5	—	ns	
Output buffer turn-off delay from $\overline{\text{WE}}$	t_{WEZ}	0	10	0	13	0	15	ns	4, 5
★ $\overline{\text{WE}}$ pulse width	t_{WPZ}	8	—	10	—	10	—	ns	5
Output buffer turn-off delay from $\overline{\text{RAS}}$	t_{OFR}	0	10	0	13	0	15	ns	4, 5
Output buffer turn-off delay from $\overline{\text{CAS}}$	t_{OFC}	0	10	0	13	0	15	ns	4, 5

Notes 1. t_{HPC} (MIN.) is applied to $\overline{\text{CAS}}$ access.


2. If $t_{WCS} \geq t_{WCS}(\text{MIN.})$, the cycle is an early write cycle and the data out will remain Hi-Z through the entire cycle. If $t_{RWD} \geq t_{RWD}(\text{MIN.})$, $t_{CWD} \geq t_{CWD}(\text{MIN.})$, $t_{AWD} \geq t_{AWD}(\text{MIN.})$ and $t_{CPWD} \geq t_{CPWD}(\text{MIN.})$, the cycle is a read modify write cycle and the data out will contain data read from the selected cell. If neither of the above conditions is met, the state of the data out is indeterminate.
 3. $\overline{\text{WE}}$: inactive (in read cycle)
 $\overline{\text{CAS}}$: inactive, $\overline{\text{OE}}$: active t_{CHO} is effective.
 $\overline{\text{CAS}}$, $\overline{\text{OE}}$: active t_{OCH} is effective.
 4. $t_{OFC}(\text{MAX.})$, $t_{OFR}(\text{MAX.})$ and $t_{WEZ}(\text{MAX.})$ define the time when the output achieves the conditions of Hi-Z and is not referenced to V_{OH} or V_{OL} .
 5. To make I/Os to Hi-Z in read cycle, it is necessary to control $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$ as follows. The effective specification depends on state of each signal.
 - (1) Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are inactive (at the end of the read cycle)
 $\overline{\text{WE}}$: inactive, $\overline{\text{OE}}$: active
 t_{OFC} is effective when $\overline{\text{RAS}}$ is inactivated before $\overline{\text{CAS}}$ is inactivated.
 t_{OFR} is effective when $\overline{\text{CAS}}$ is inactivated before $\overline{\text{RAS}}$ is inactivated.
 The slower of t_{OFC} and t_{OFR} becomes effective.
 - (2) Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are active or either $\overline{\text{RAS}}$ or $\overline{\text{CAS}}$ is active (in read cycle)
 $\overline{\text{WE}}$, $\overline{\text{OE}}$: inactive t_{WEZ} is effective.
 Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are inactive or $\overline{\text{RAS}}$ is active and $\overline{\text{CAS}}$ is inactive (at the end of read cycle)
 $\overline{\text{WE}}$, $\overline{\text{OE}}$: active and either t_{RRH} or t_{RCH} must be met t_{WEZ} and t_{WPZ} are effective.
 The faster of t_{OEZ} and t_{WEZ} becomes effective.
- The faster of (1) and (2) becomes effective.

Refresh Cycle


Parameter	Symbol	$t_{RAC} = 50 \text{ ns}$		$t_{RAC} = 60 \text{ ns}$		$t_{RAC} = 70 \text{ ns}$		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
$\overline{\text{CAS}}$ setup time	t_{CSR}	5	–	5	–	5	–	ns	
$\overline{\text{CAS}}$ hold time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh)	t_{CHR}	10	–	10	–	10	–	ns	
$\overline{\text{RAS}}$ precharge $\overline{\text{CAS}}$ hold time	t_{RPC}	5	–	5	–	5	–	ns	
$\overline{\text{RAS}}$ pulse width ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh)	t_{RASS}	100	–	100	–	100	–	μs	1
$\overline{\text{RAS}}$ precharge time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh)	t_{RPS}	90	–	110	–	130	–	ns	1
$\overline{\text{CAS}}$ hold time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh)	t_{CHS}	–50	–	–50	–	–50	–	ns	1
$\overline{\text{WE}}$ hold time	t_{WHR}	15	–	15	–	15	–	ns	

Note 1. This specification is applied only to the μ PD42S18165.

Read Cycle

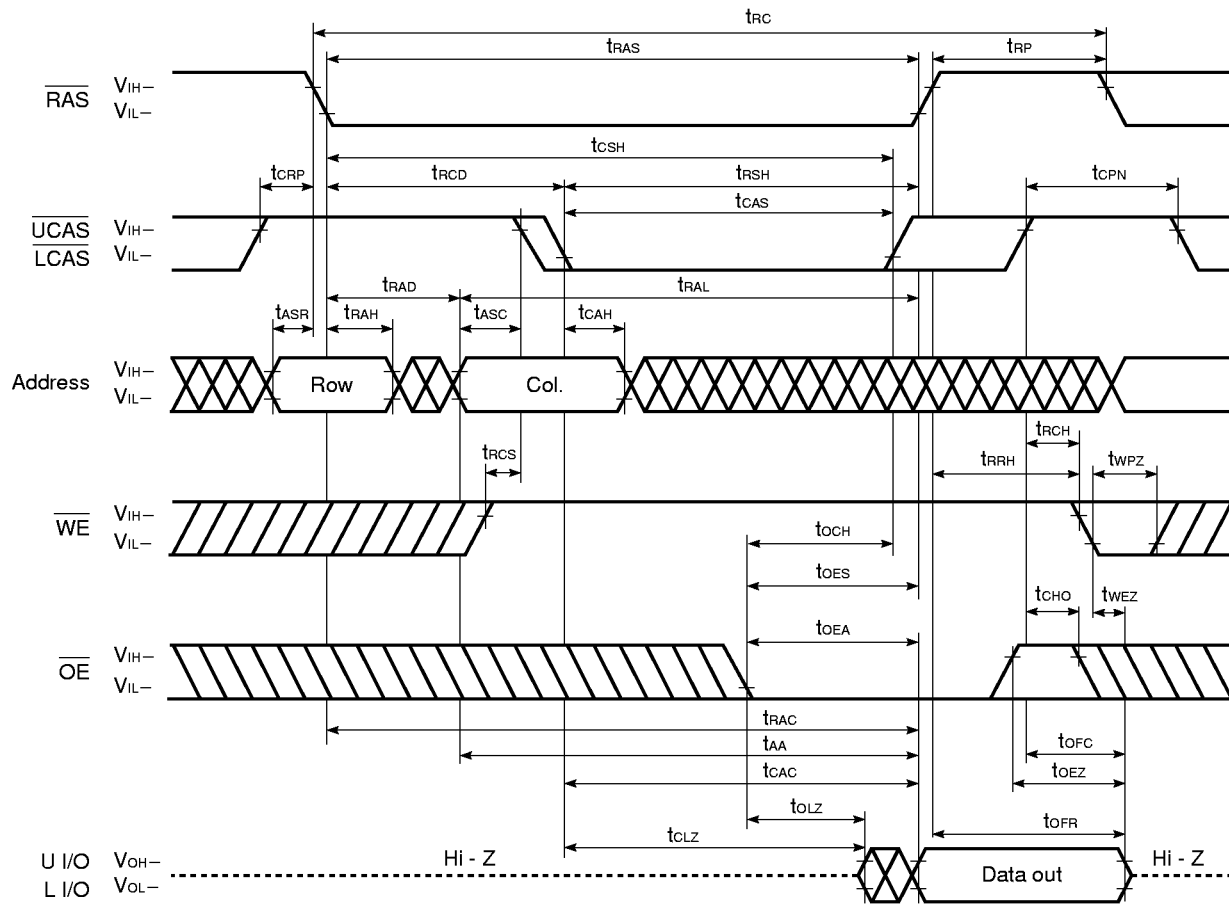


Upper Byte Read Cycle

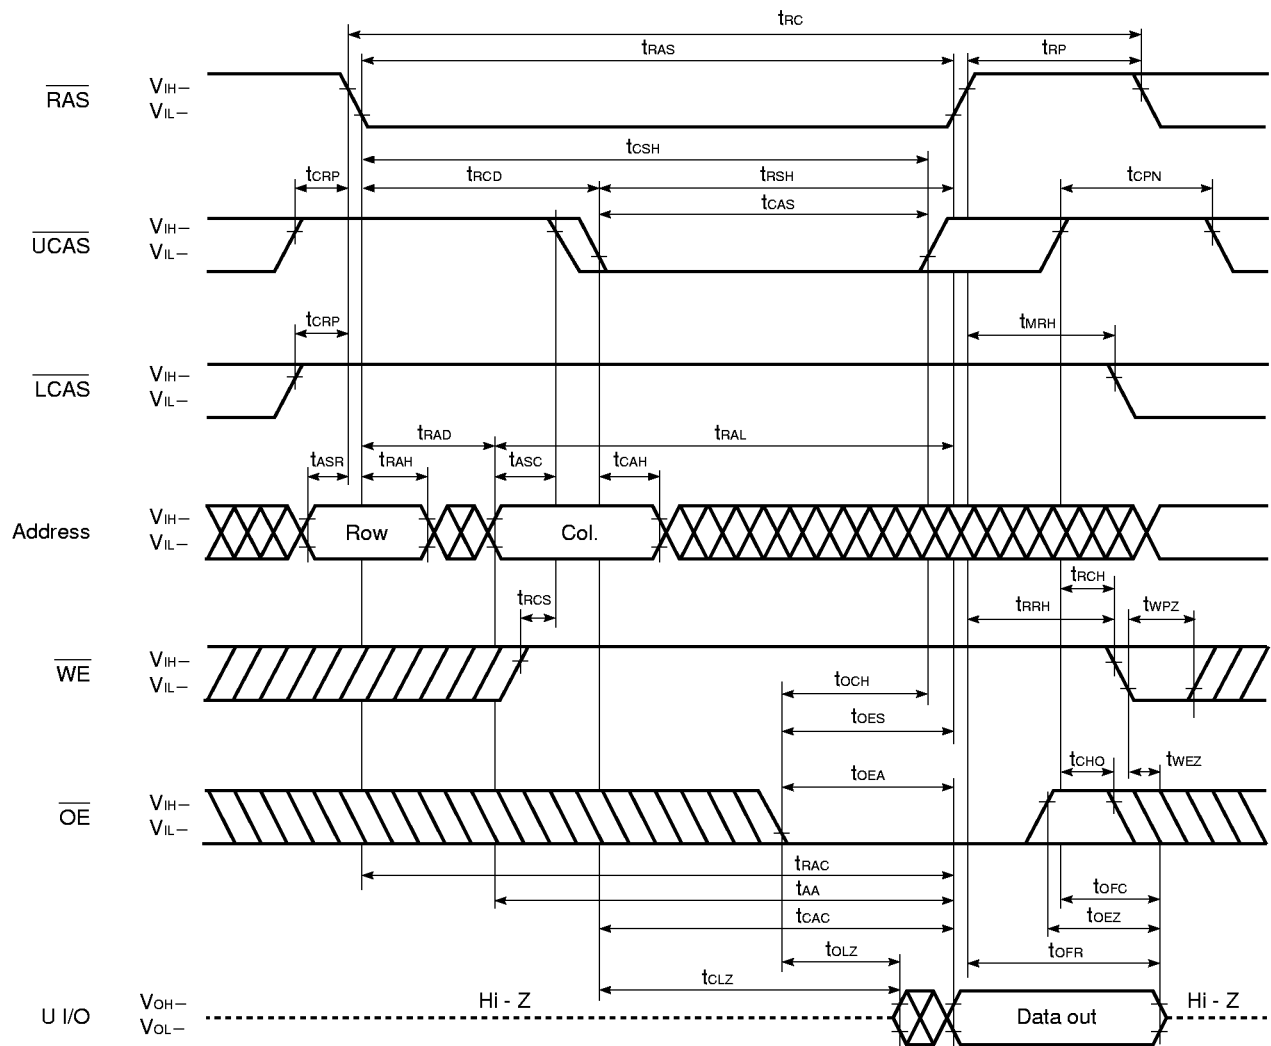


Remark L I/O: Hi-Z

Lower Byte Read Cycle

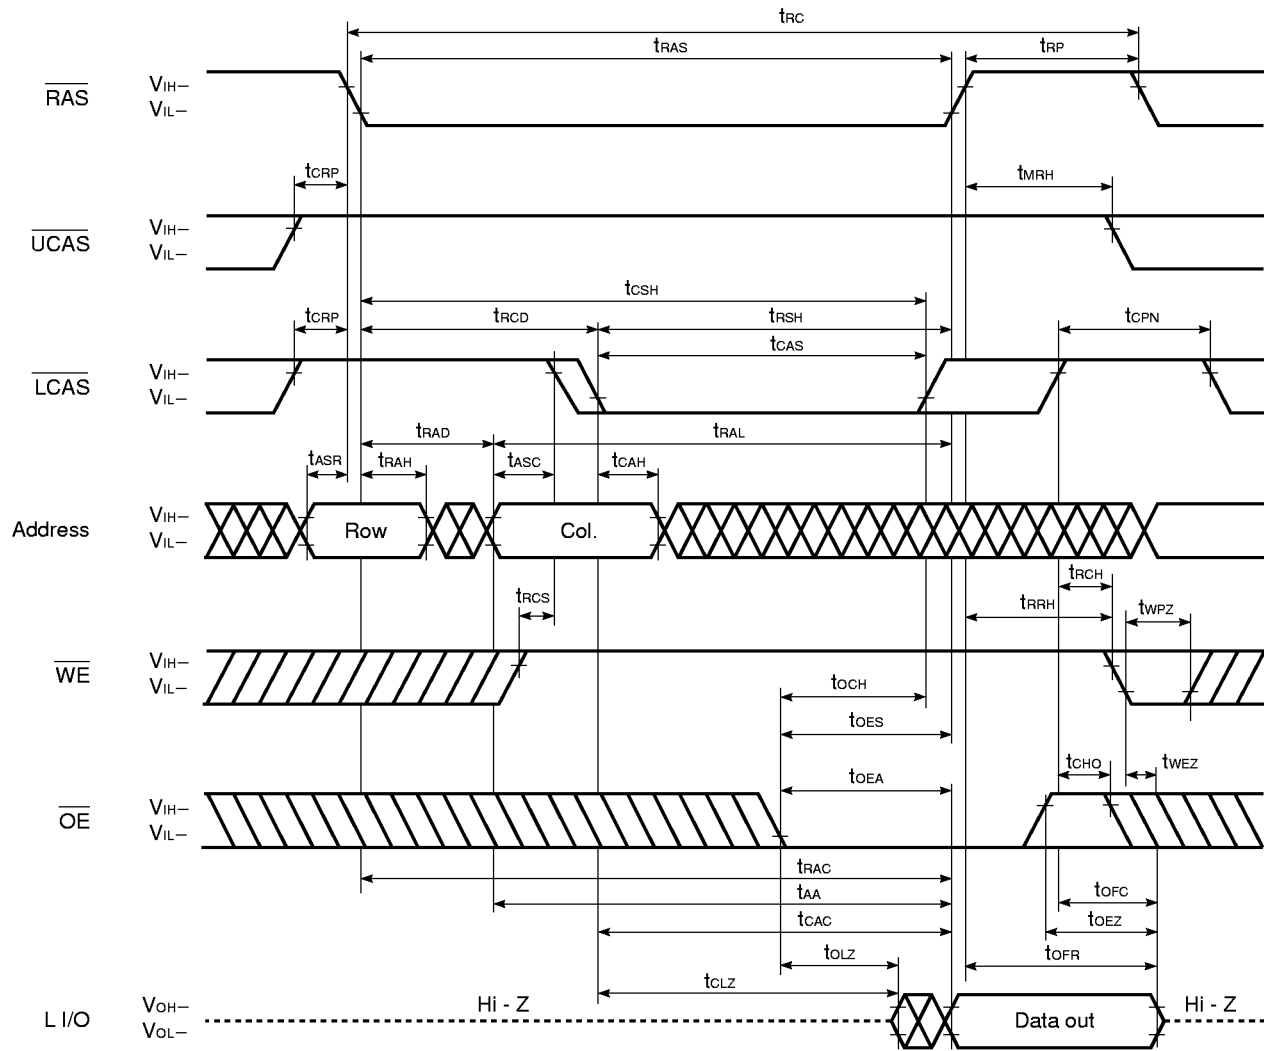


Remark U I/O: Hi-Z

Early Write Cycle

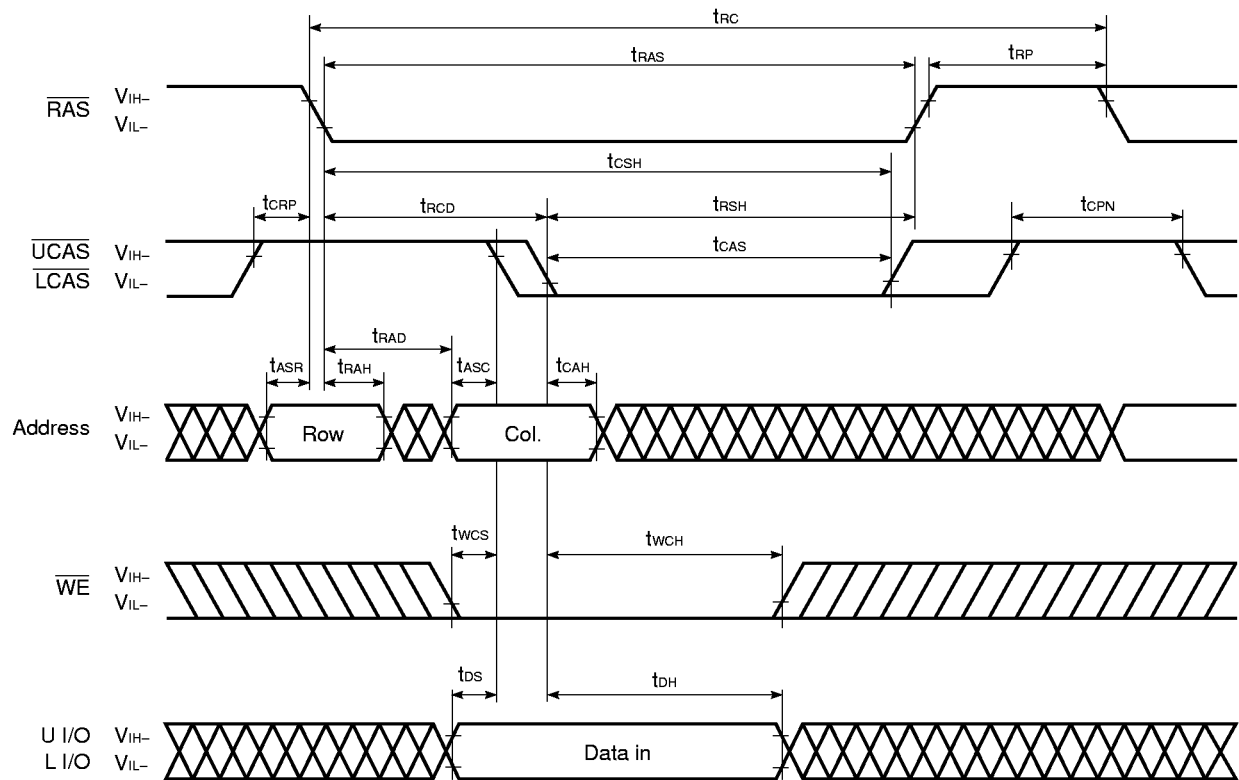


Remark $\overline{\text{OE}}$: Don't care

Upper Byte Early Write Cycle

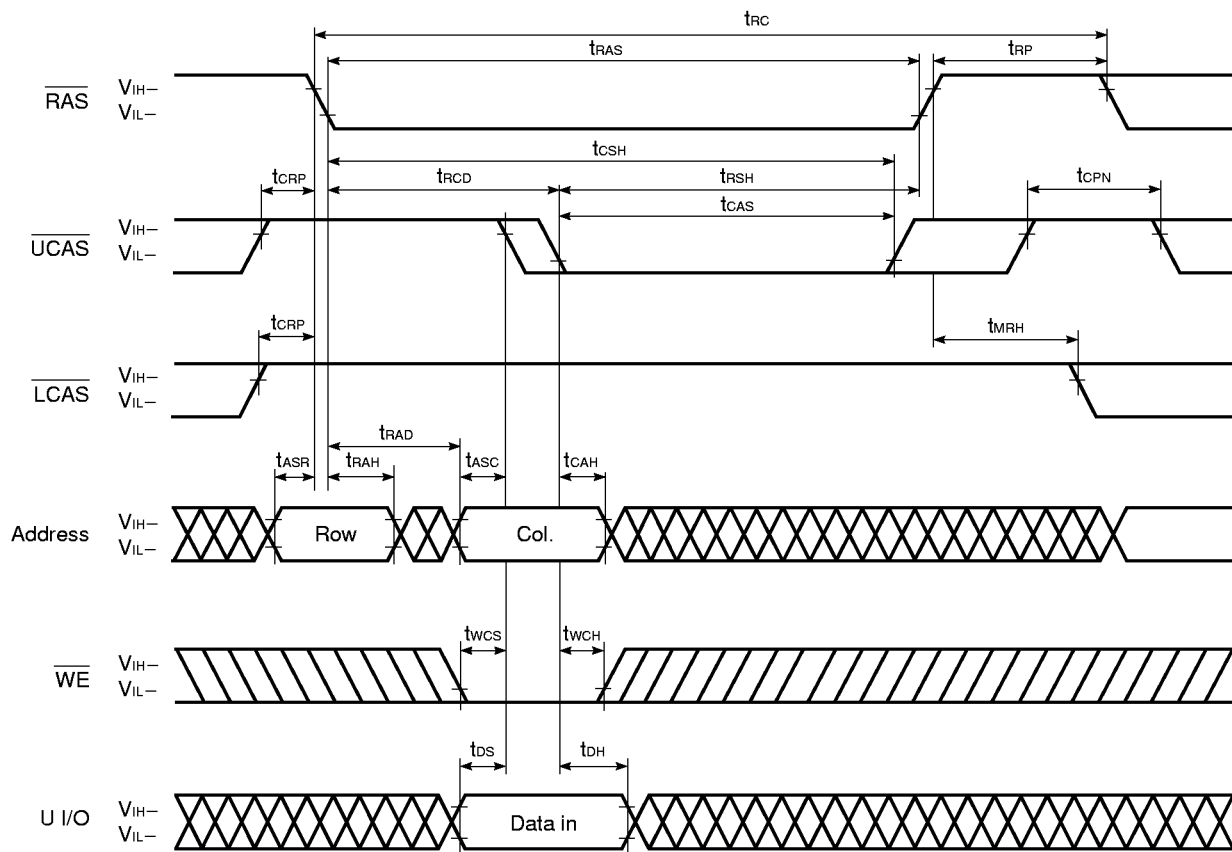


Remark $\overline{OE}$, L I/O: Don't care

Lower Byte Early Write Cycle

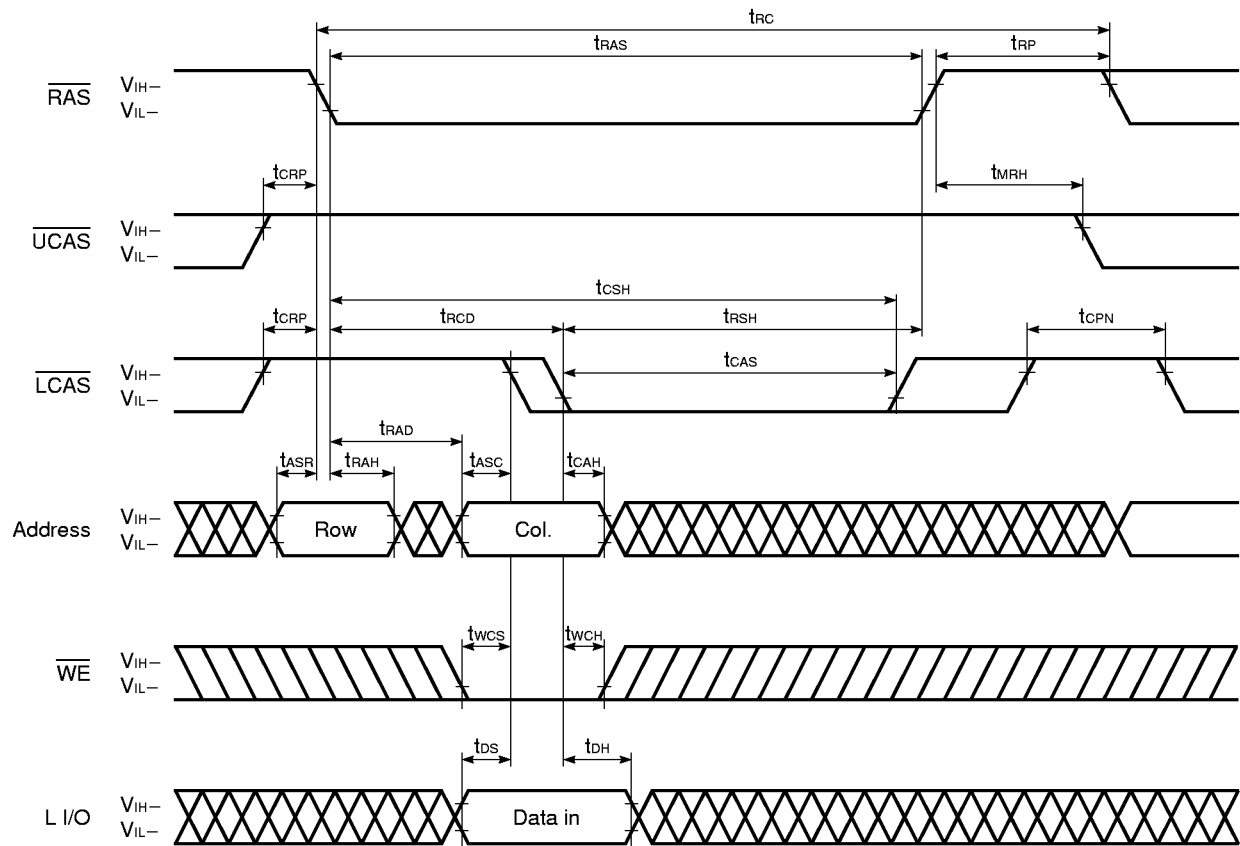


Remark $\overline{\text{OE}}$, U I/O: Don't care

Late Write Cycle

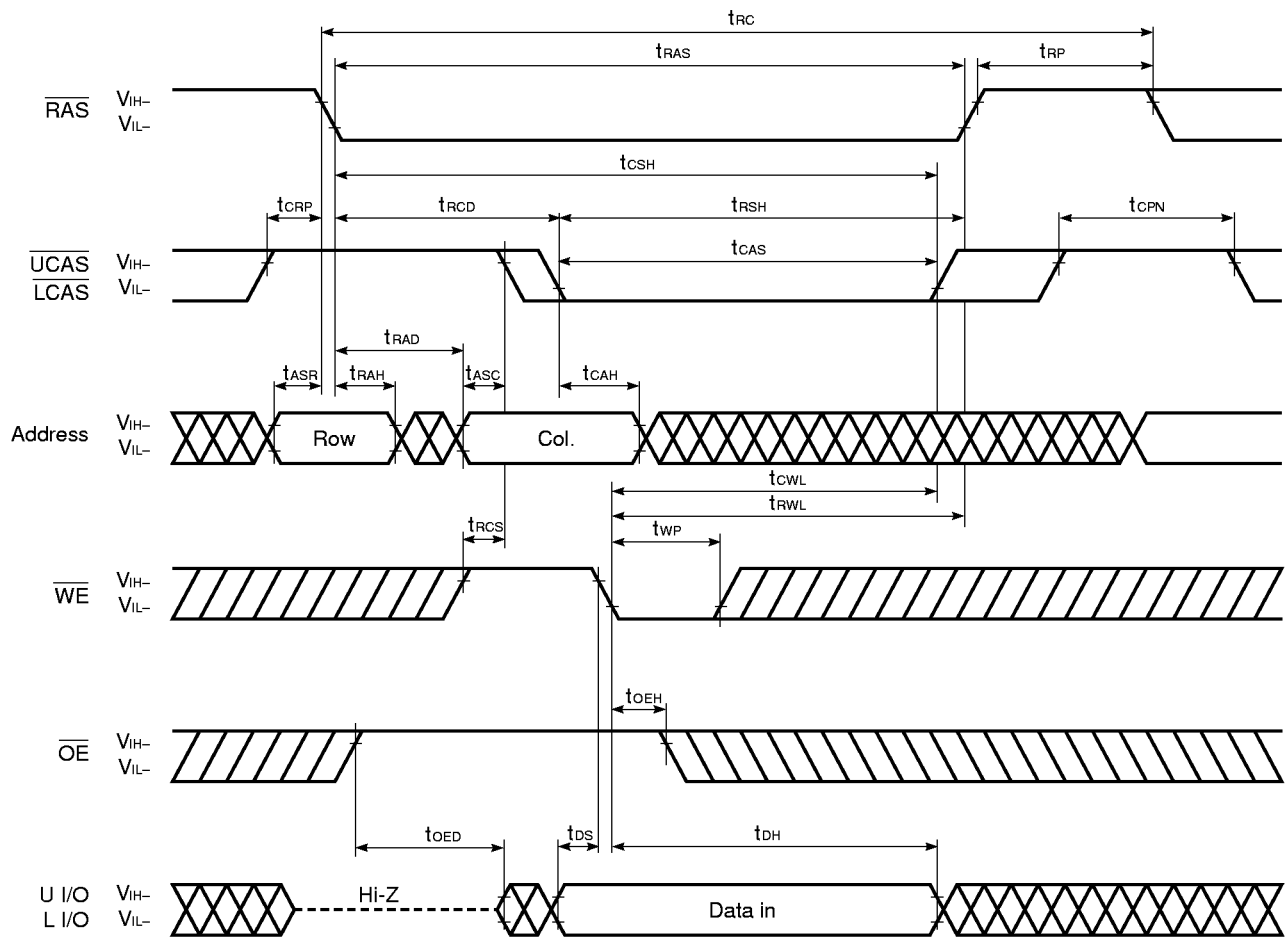


Upper Byte Late Write Cycle

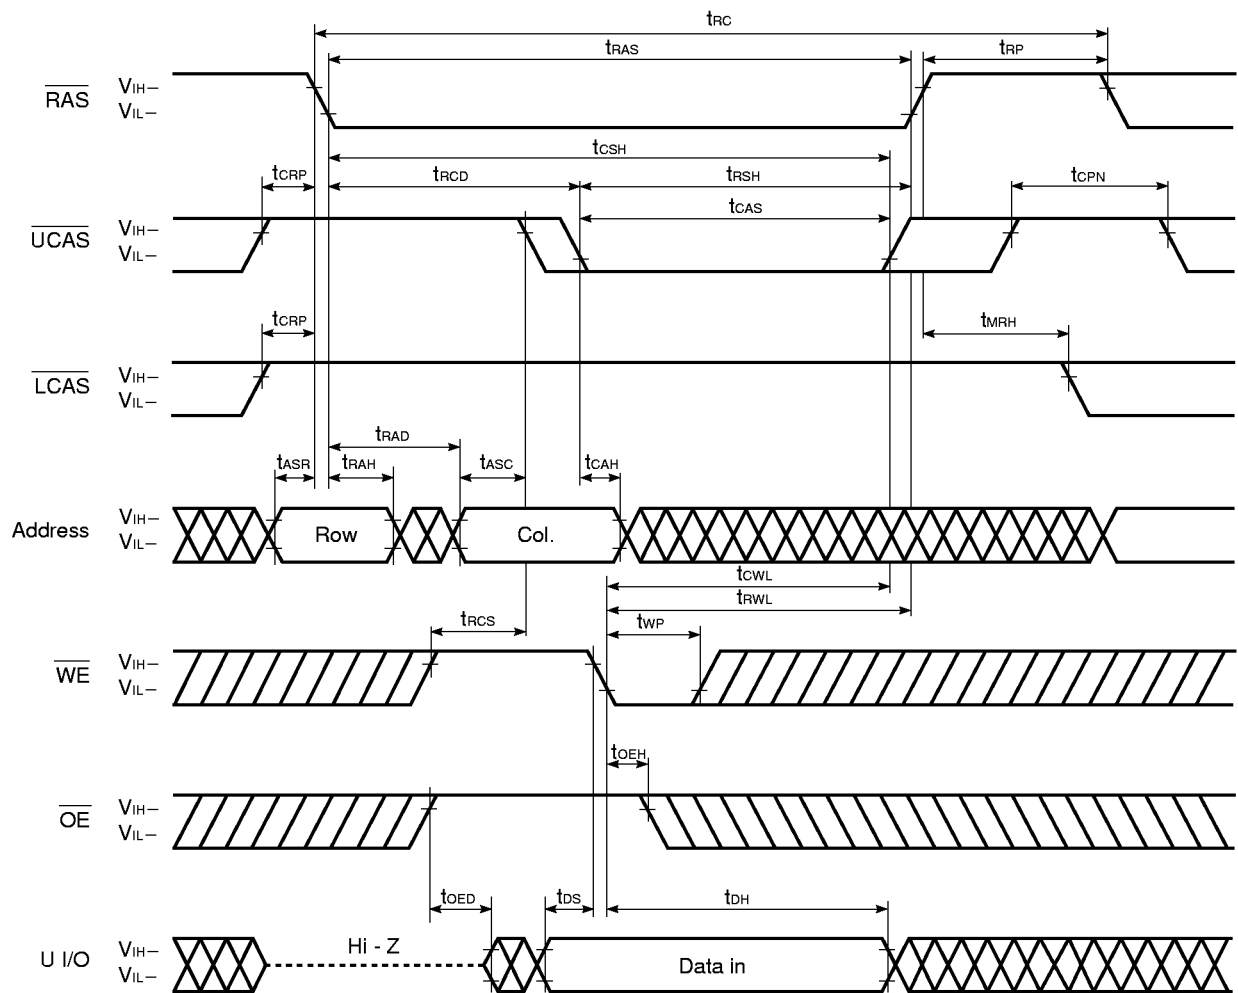


Remark L I/O: Don't care

Lower Byte Late Write Cycle

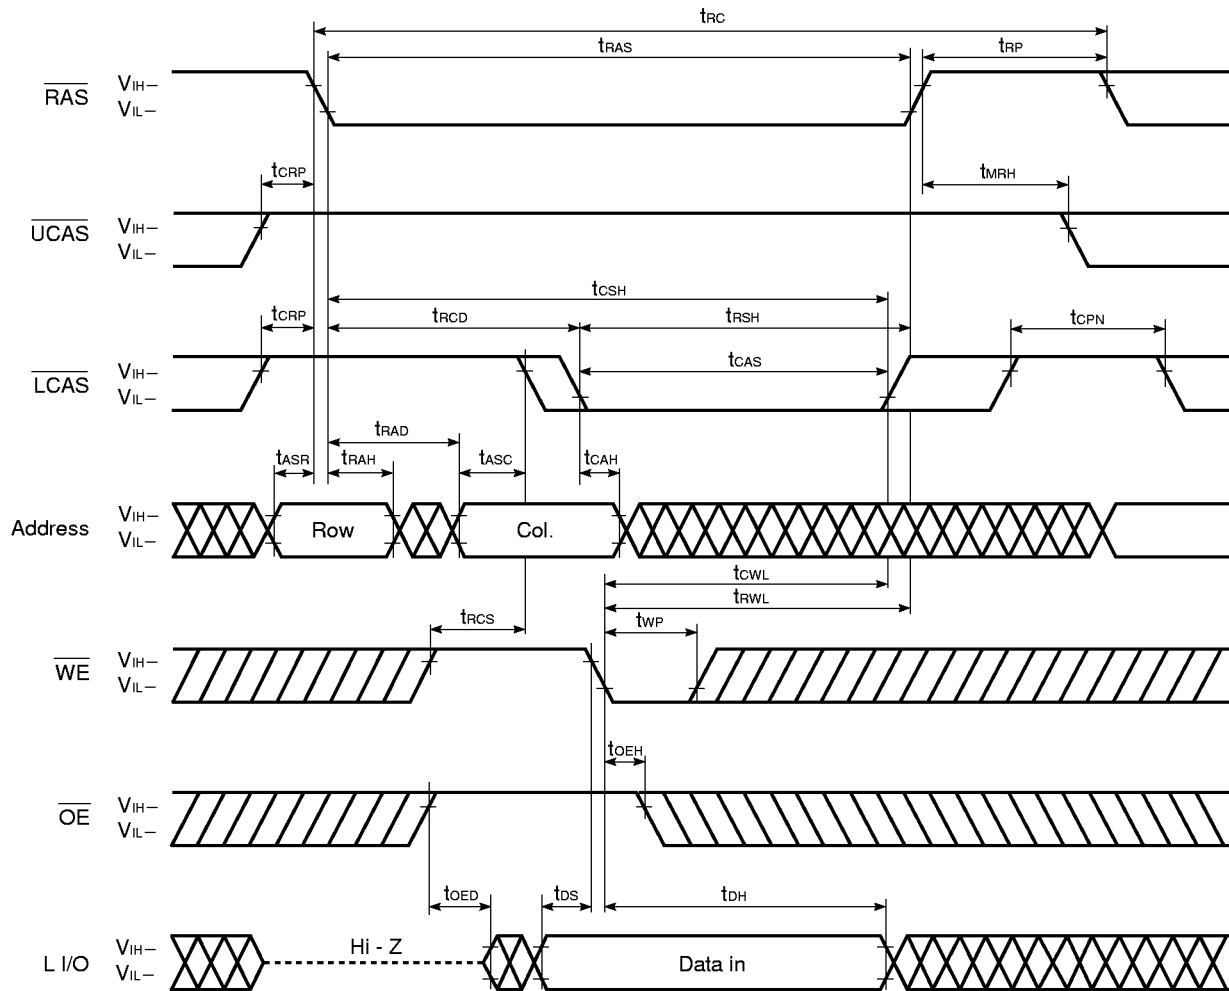


Remark U I/O: Don't care

Read Modify Write Cycle

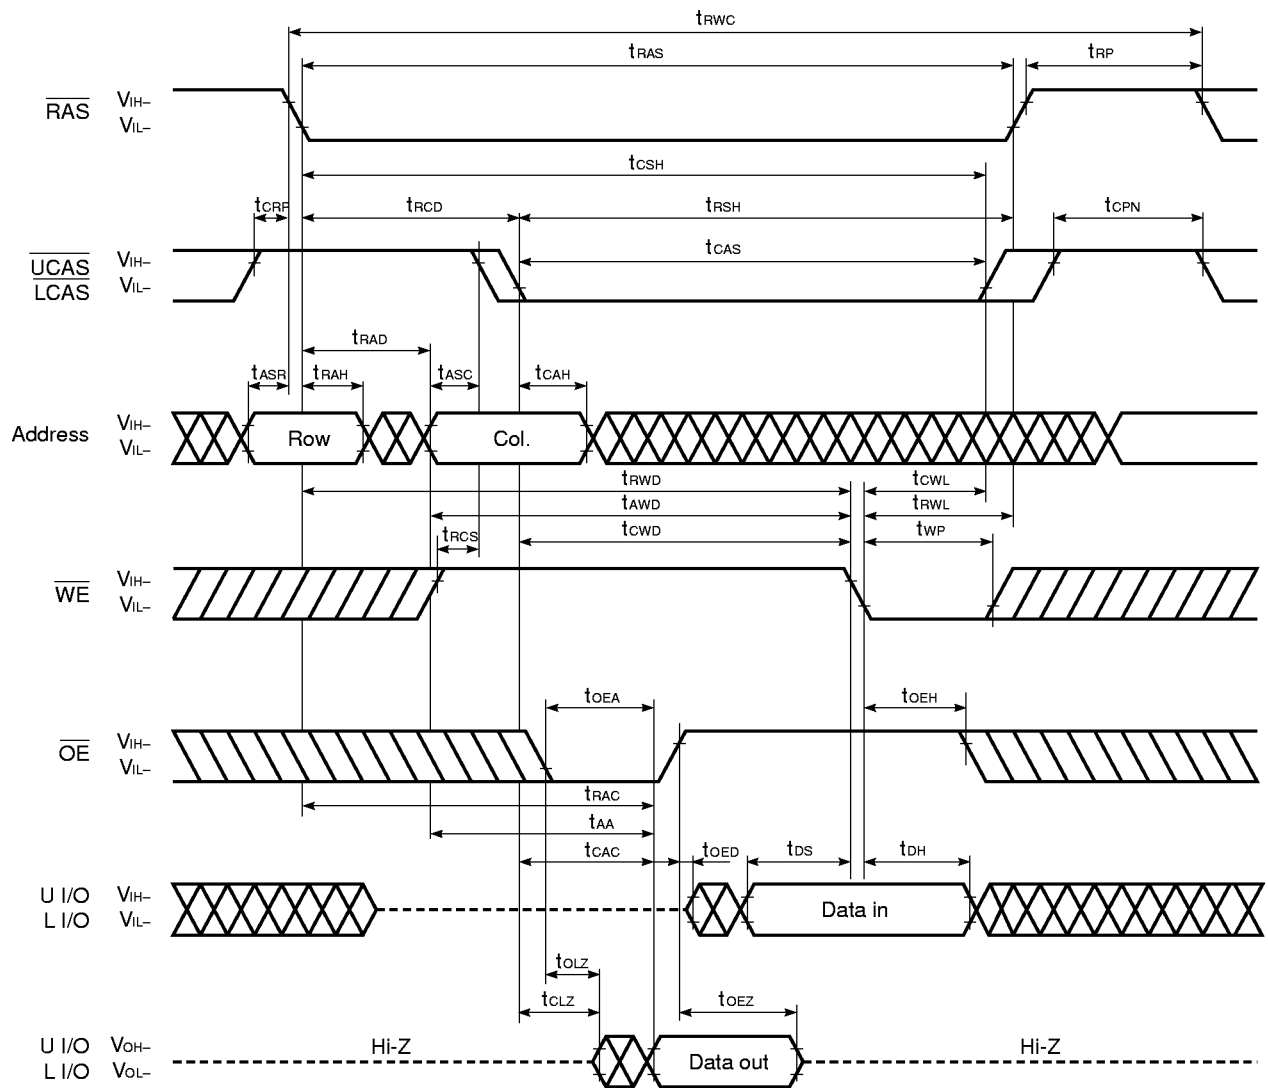


26

Lower Byte Read Modify Write Cycle

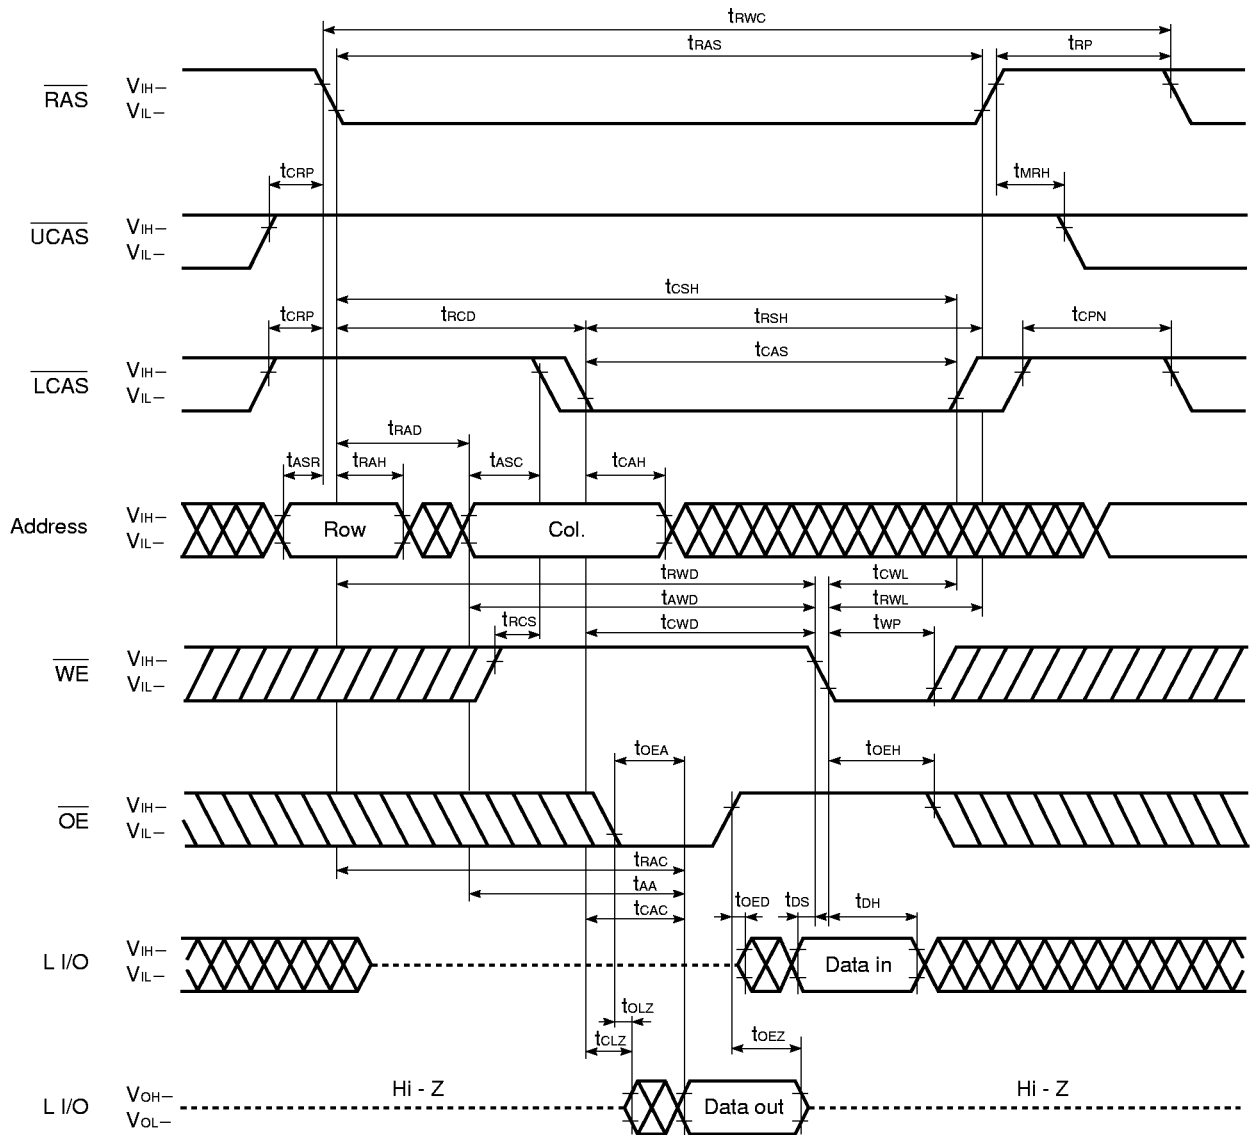

Remark In this cycle, the input data to Upper I/O is ineffective. The data out of that remains Hi-Z.

Hyper Page Mode (EDO) Byte Read Cycle

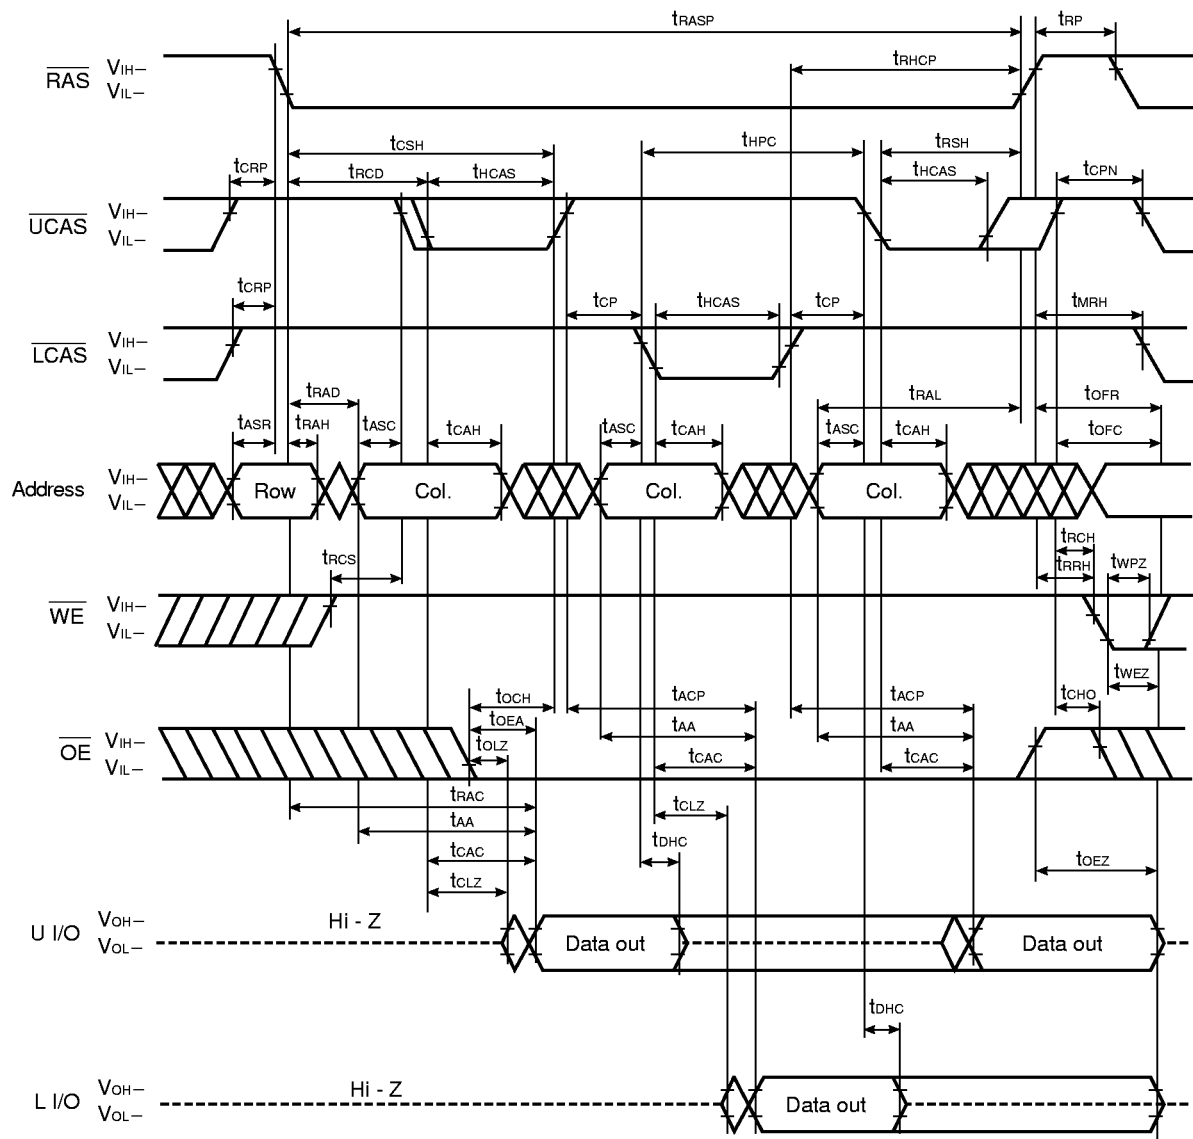

- Remark**
1. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.
 2. This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.

[illegible]

30

The diagram illustrates the timing relationships between several control and data signals during memory access operations. The signals shown are:


- RAS**: Row Address Strobe, active low.
- UCAS/LCAS**: Column Address Strobe / Local Column Address Strobe, active low.
- Address**: Memory address bus, showing Row, Col.A, Col.B, and Col.C segments.
- WE**: Write Enable, active low.
- OE**: Output Enable, active low.
- U I/O / L I/O**: Data bus, showing Hi-Z (high impedance) states and data output A, B, and C.

Key timing parameters indicated by arrows include:

- t_{RASP}**: RAS pulse width.
- t_{CRP}**: RAS-to-Column Address Strobe setup time.
- t_{CSDH}**: Column Address Strobe delay from RAS.
- t_{HCAS}**: Column Address Strobe pulse width.
- t_{CP}**: Column Address Strobe setup/hold times relative to data.
- t_{THPC}**: Tri-state High Pulse Width at Column Address Strobe.
- t_{TRSH}**: Tri-state High Setup Time at Column Address Strobe.
- t_{TPN}**: Tri-state Pulse Negation Time at Column Address Strobe.
- t_{RAD}**: Row Address Delay.
- t_{ASR}, t_{RAH}, t_{ASC}, t_{CAH}**: Various setup and hold times for Row and Column addresses.
- t_{TRAC}, t_{TAA}, t_{CAC}**: Access times for Row, Array, and Column.
- t_{CHS}**: Column Address Hold Setup Time.
- t_{TOES}, t_{TCAC}, t_{TAA}**: Output Enable setup times.
- t_{TOEP}, t_{TOEA}, t_{TOEZ}**: Output Enable pulse width and delay times.
- t_{TOFC}, t_{TOFR}**: Output Full Charge and Refresh Times.
- t_{RRH}**: Read Refresh Hold Time.

31


Hyper Page Mode (EDO) Early Write Cycle

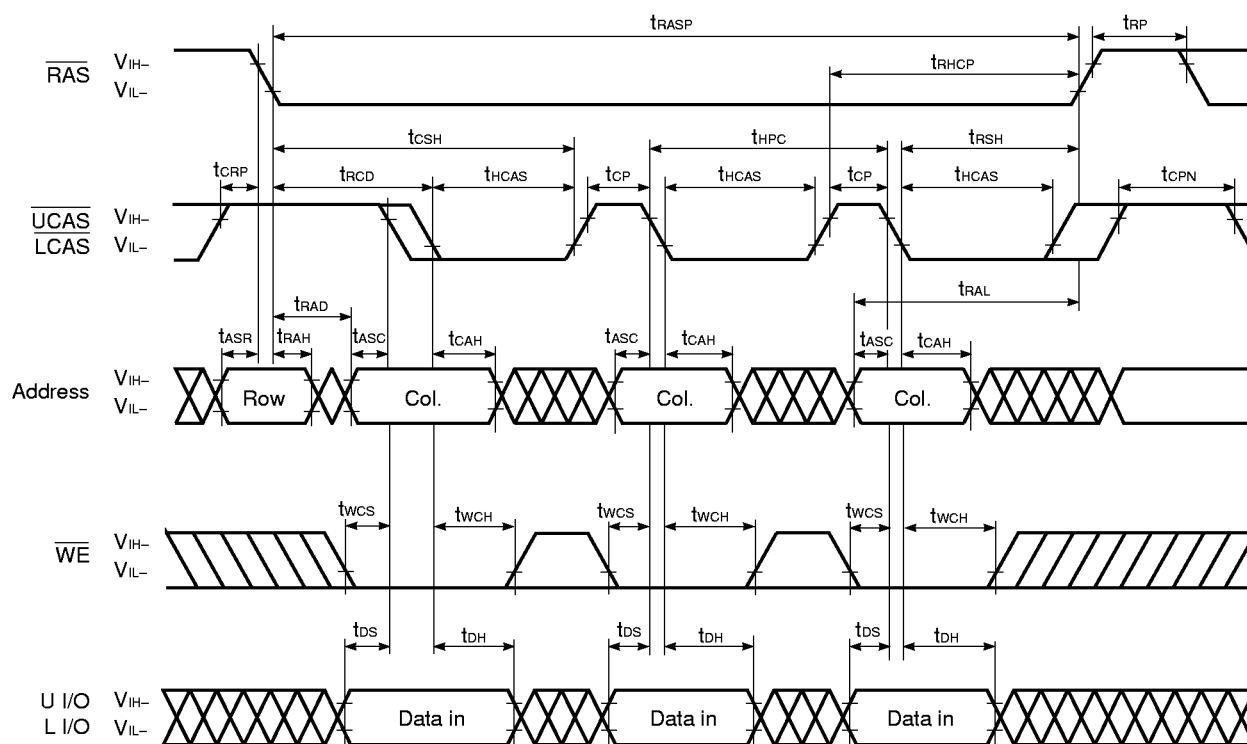

Remarks 1. $\overline{OE}$: Don't care

2. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{CAS}$ cycles within the same $\overline{RAS}$ cycle.


Hyper Page Mode (EDO) Byte Early Write Cycle

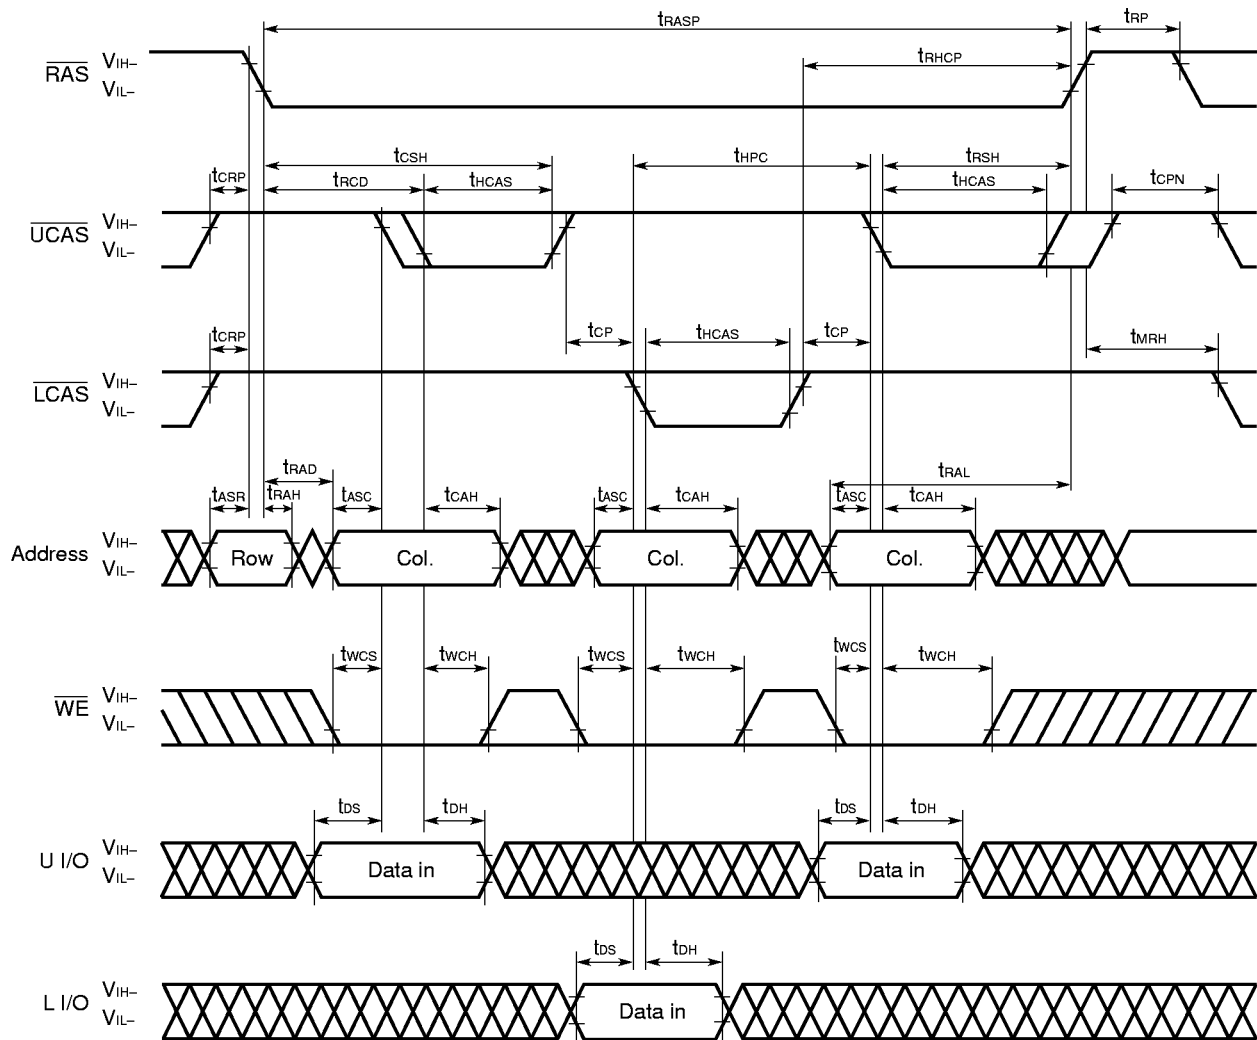

Remarks 1. $\overline{\text{OE}}$: Don't care


2. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.
3. This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.

Hyper Page Mode (EDO) Late Write Cycle

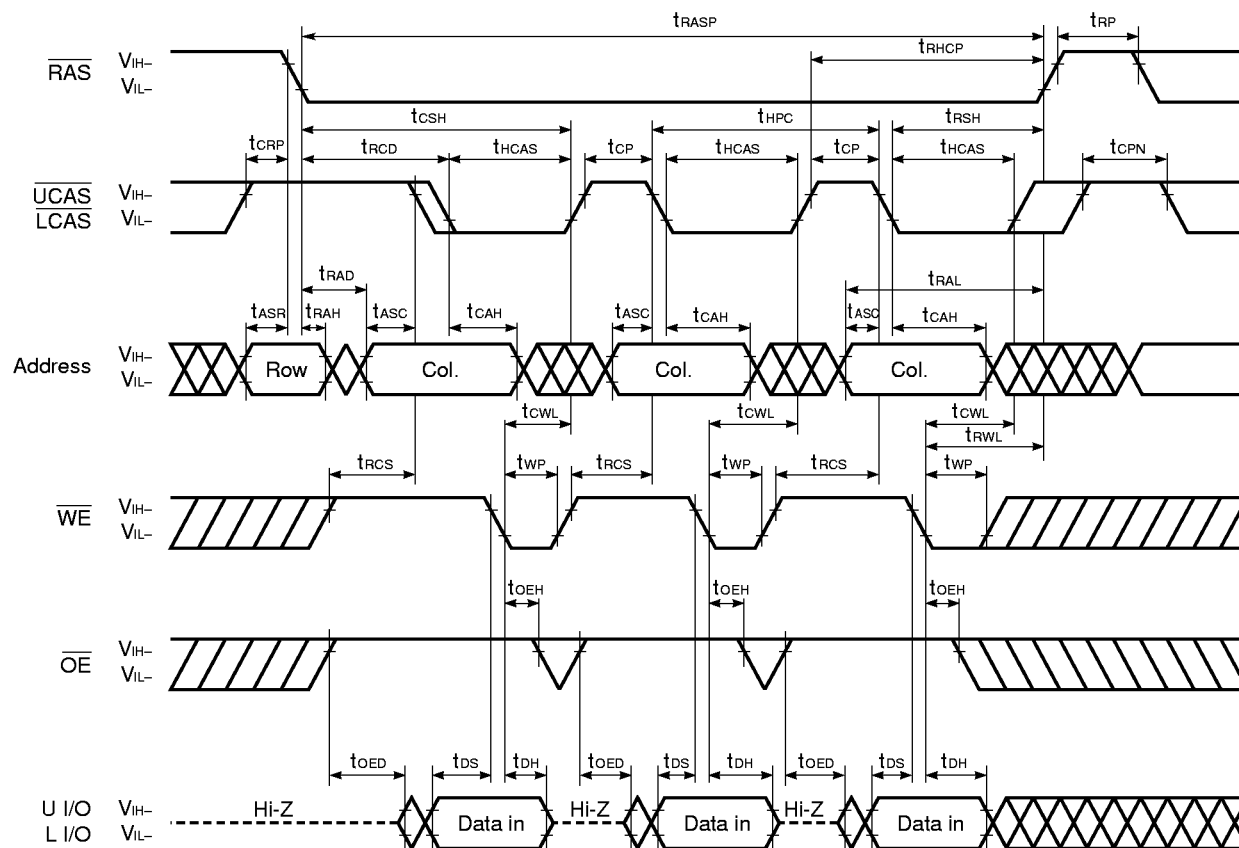

Remark In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.

Hyper Page Mode (EDO) Byte Late Write Cycle

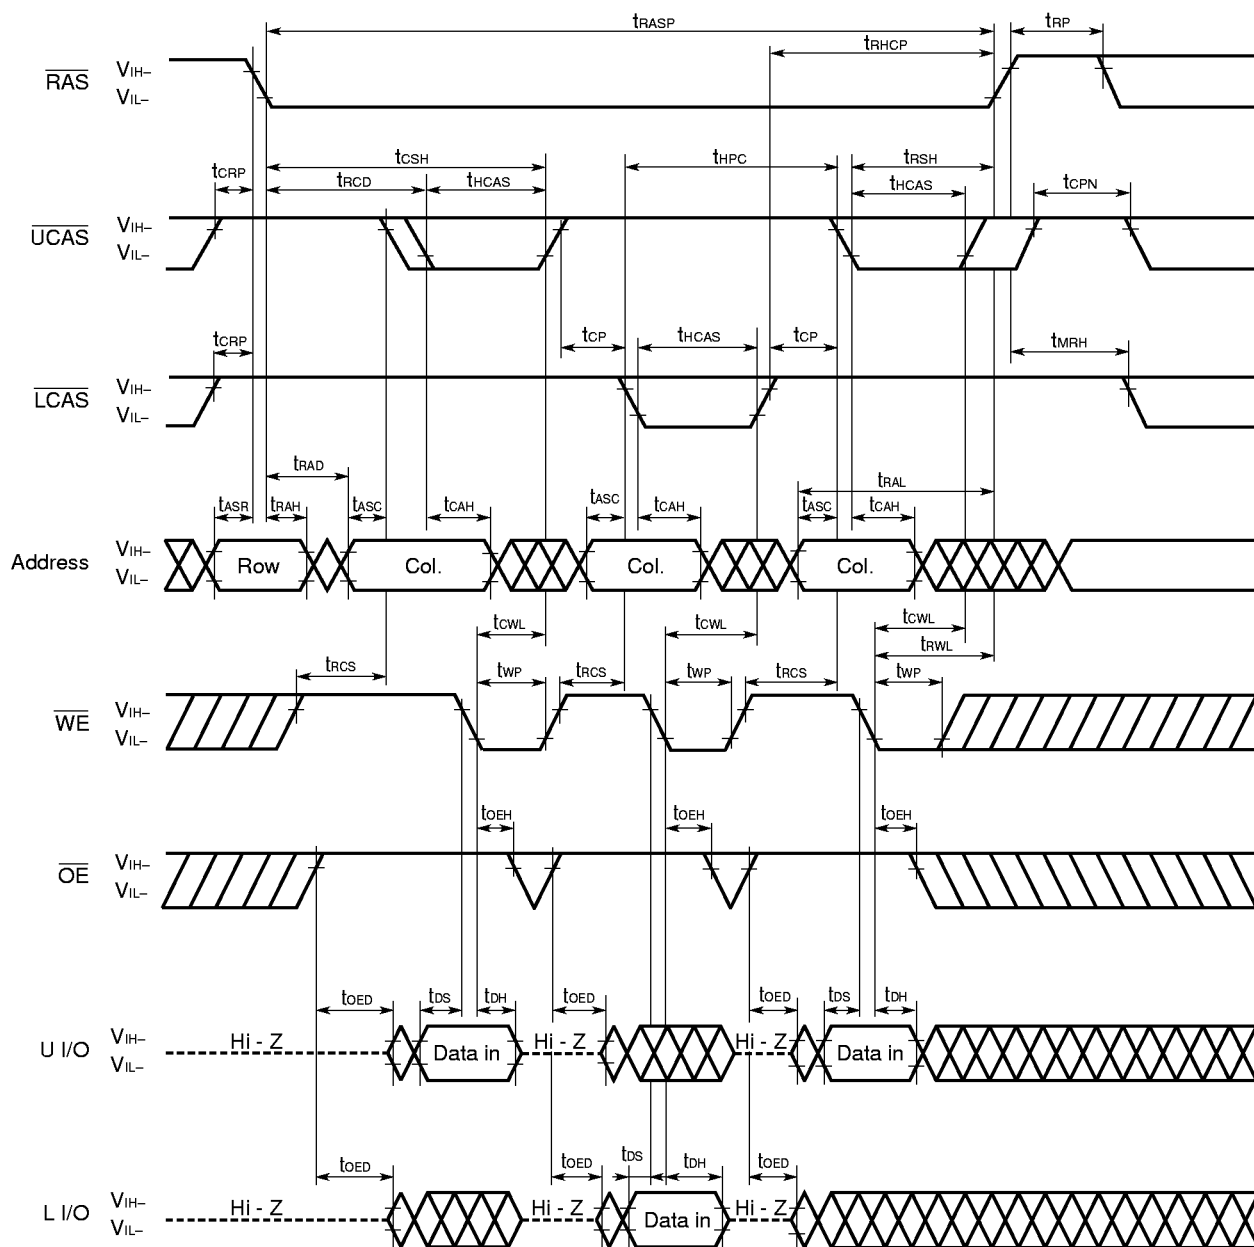


- Remarks 1.** In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.
- 2.** This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.

The timing diagram illustrates the sequence of signals for the 64K1602 LCD module. The signals and their timing parameters are as follows:

- RAS:** Active low signal. Timing parameters include t_{RAS} (pulse width), t_{RCD} (setup time before data), t_{RP} (return time to high), and t_{HPRWC} (hold time after data).
- UCAS/LCAS:** Active low signal. Timing parameters include t_{CRP} (setup time before RAS), t_{CP} (pulse width), t_{CAS} (setup time before RAS), and t_{CPN} (return time to high).
- Address:** Data bus for Row and Column addresses. Timing parameters include t_{RAD} (Row Address Decoding time), t_{ASC} (Address Setup time), t_{CAH} (Address Hold time), t_{RCS} (Row Command Setup time), t_{CWD} (Column Write Delay time), t_{WPD} (Write Pulse Width time), t_{ACPD} (Address Command Pulse Delay time), t_{CPWD} (Column Pulse Width Delay time), t_{CWL} (Column Write Latency time), t_{RFL} (Row Full Latency time), and t_{WFL} (Write Full Latency time).
- WE:** Active low signal. Timing parameters include t_{RAC} (Row Address Command time), t_{AA} (Address Afterglow time), t_{CAC} (Column Address Command time), t_{OEH} (Output Enable Hold time), and t_{OEA} (Output Enable Afterglow time).
- OE:** Active low signal. Timing parameters include t_{CLZ} (Clear Latency time), t_{OED} (Output Enable Delay time), t_{OLZ} (Output Latency time), t_{OEZ} (Output Enable Zero time), t_{DS} (Data Setup time), and t_{DH} (Data Hold time).
- I/O:** Data bus for input and output. The diagram shows three data cycles, each with an output phase (out) and an input phase (in). The input phase is marked with t_{DS} and t_{DH} .

36

Hyper Page Mode (EDO) Byte Read Modify Write Cycle

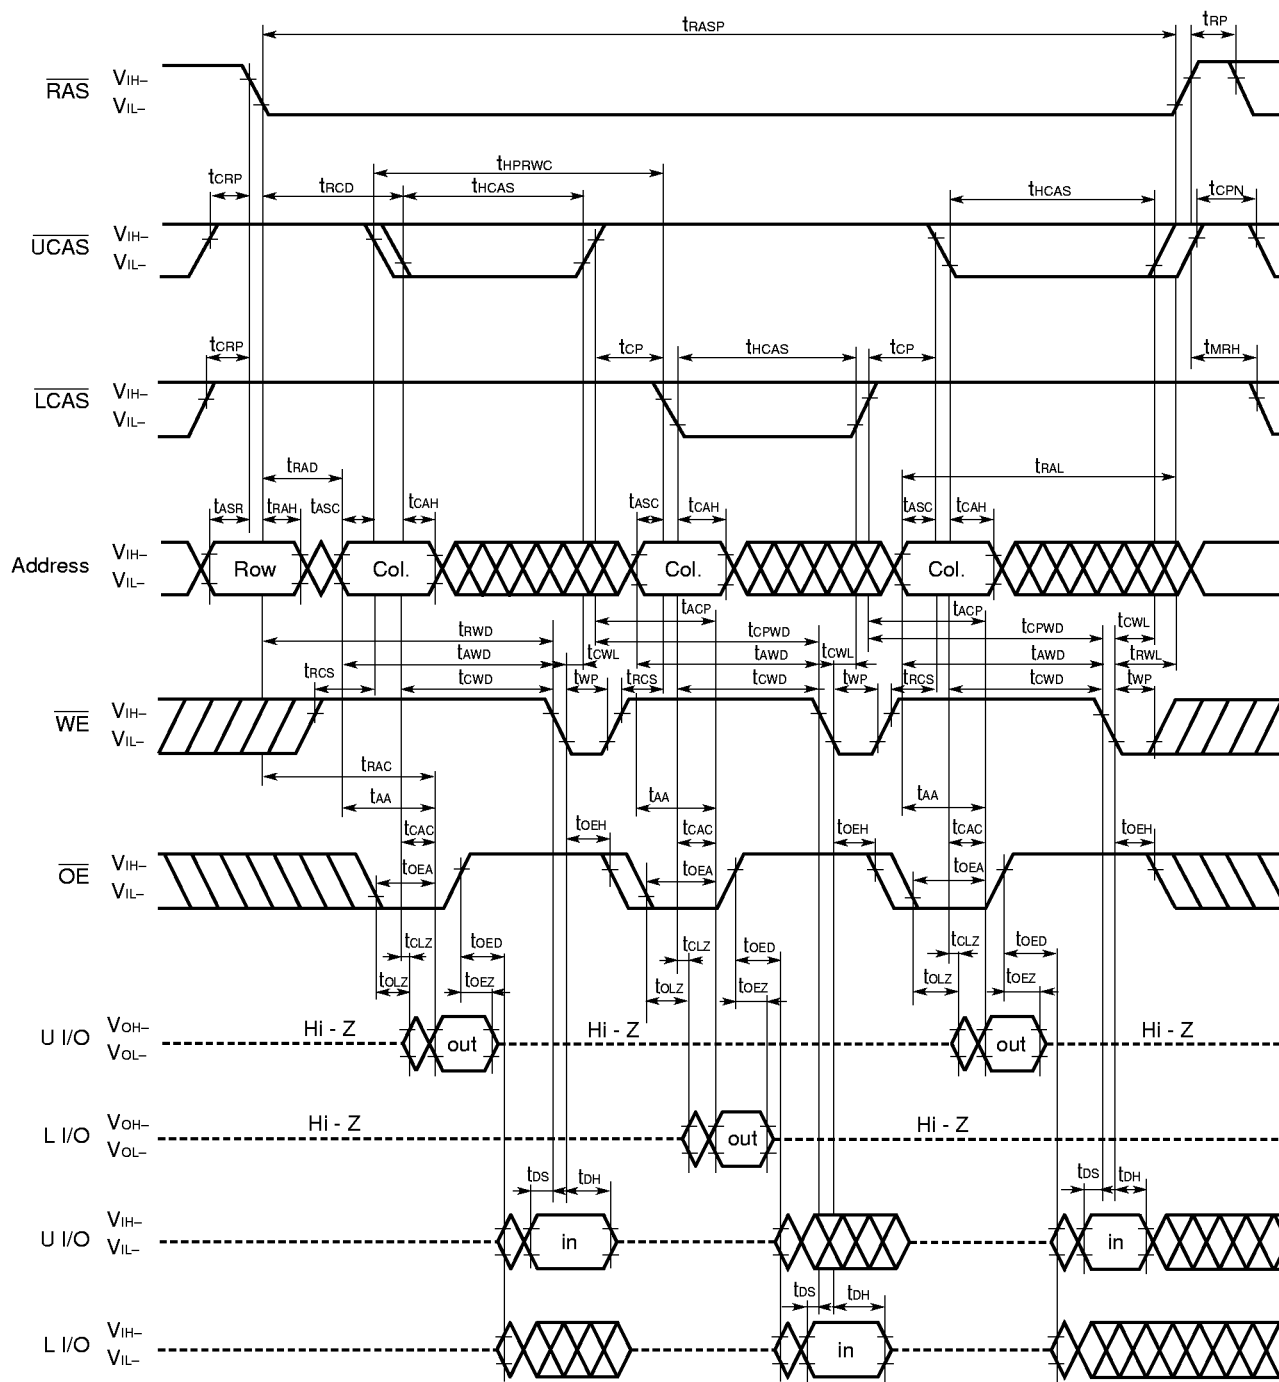


Remarks 1. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.

2. This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.

[illegible]

38

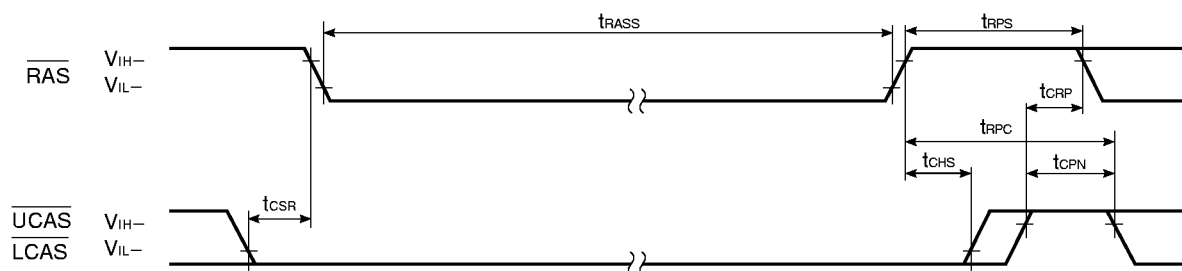$\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh Cycle (Only for the μ PD42S18165)

Remark Address, $\overline{\text{WE}}$, $\overline{\text{OE}}$: Don't care L I/O, U I/O: Hi-Z

Cautions on Use of $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh

$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh can be used independently when used in combination with distributed $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh; However, when used in combination with burst $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh or with long $\overline{\text{RAS}}$ only refresh (both distributed and burst), the following cautions must be observed.

(1) Normal Combined Use of $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh and Burst $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Long Refresh

When $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh and burst $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh are used in combination, please perform $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh 1,024 times within a 16 ms interval just before and after setting $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh.

(2) Normal Combined Use of $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh and Long $\overline{\text{RAS}}$ Only Refresh

When $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh and $\overline{\text{RAS}}$ only refresh are used in combination, please perform $\overline{\text{RAS}}$ only refresh 1,024 times within a 16 ms interval just before and after setting $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh.


(3) If $t_{\text{RASS(MIN.)}}$ is not satisfied at the beginning of $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh cycles ($t_{\text{RAS}} < 100 \mu\text{s}$), $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles will be executed one time.

If $10 \mu\text{s} < t_{\text{RAS}} < 100 \mu\text{s}$, $\overline{\text{RAS}}$ precharge time for $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh (t_{RPS}) is applied.

And refresh cycles (1,024/128 ms) should be met.


For details, please refer to **How to use DRAM** User's Manual.

CAS Before RAS Refresh Cycle

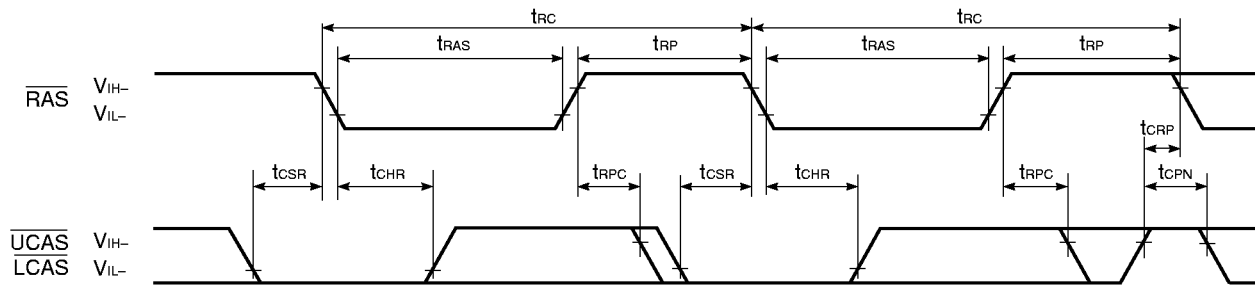


Remark Address, $\overline{WE}$, $\overline{OE}$: Don't care L I/O, U I/O: Hi-Z

RAS Only Refresh Cycle

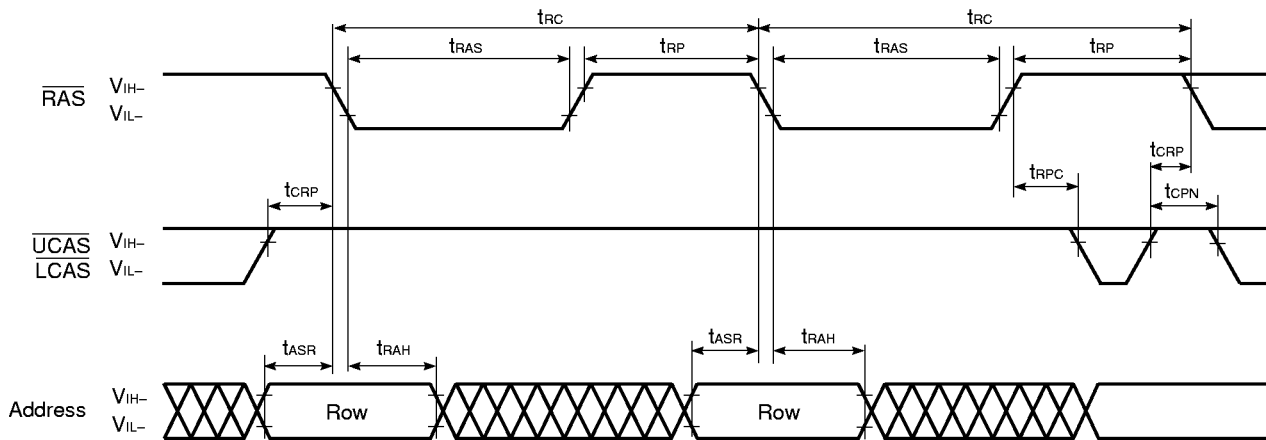


Remark $\overline{WE}$, $\overline{OE}$: Don't care L I/O, U I/O: Hi-Z

Hidden Refresh Cycle (Read)

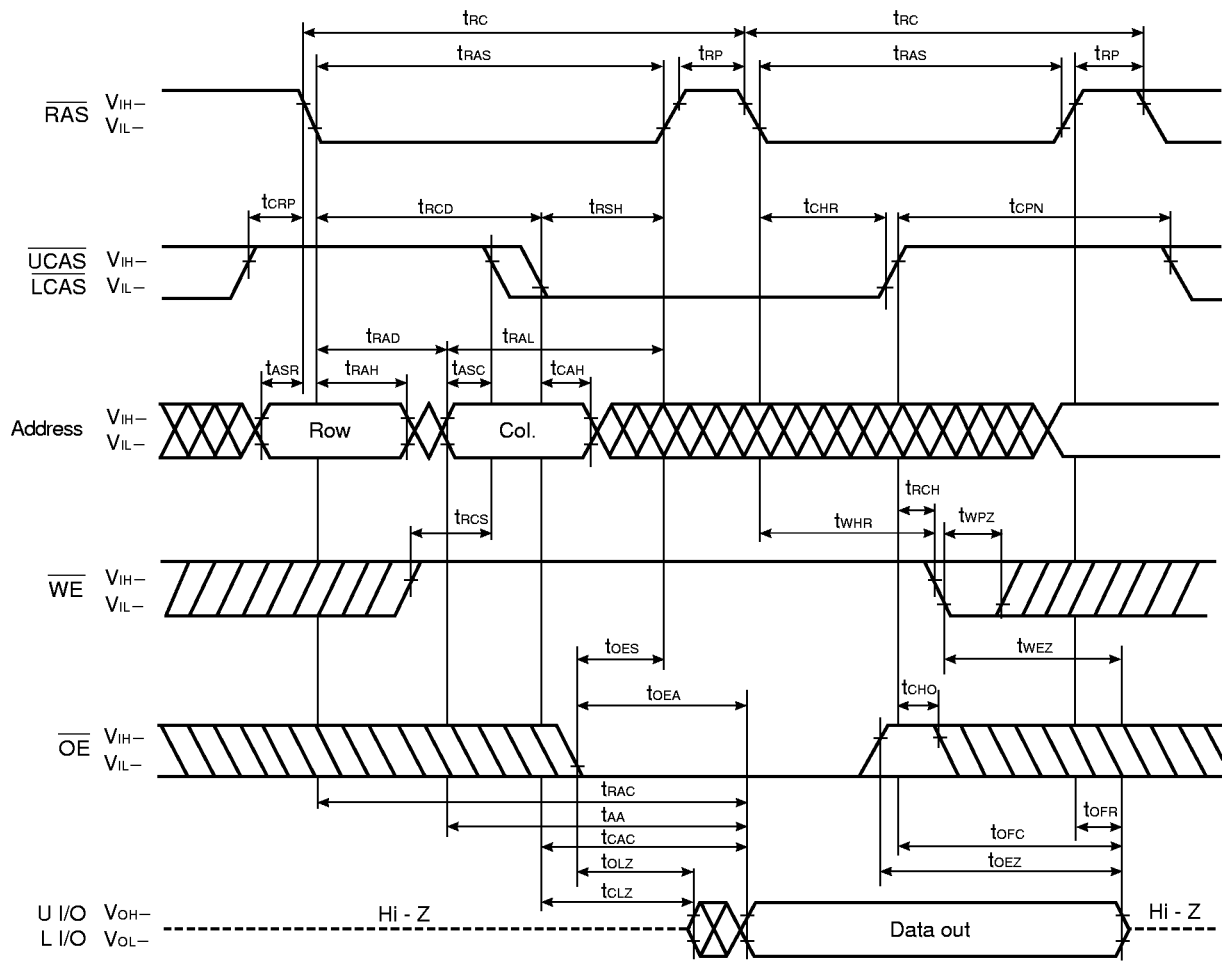


Hidden Refresh Cycle (Write)

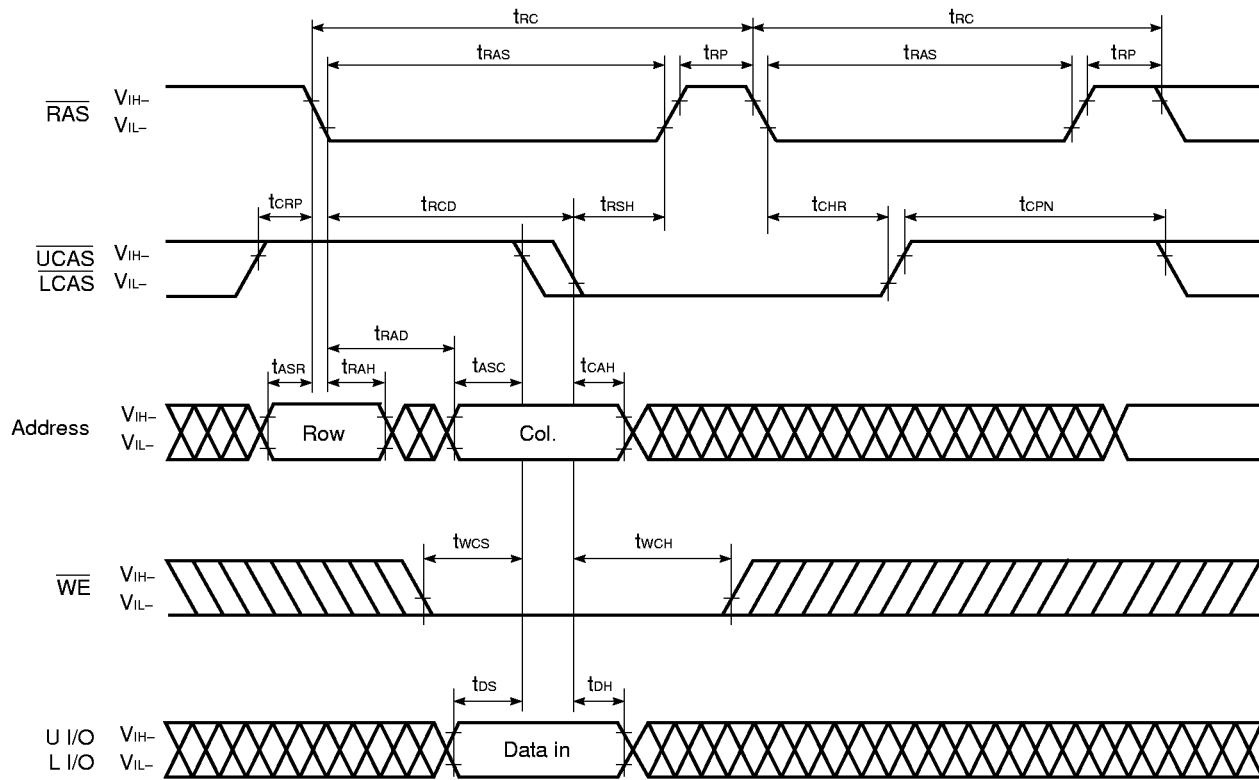

Remark $\overline{\text{OE}}$: Don't care

Package Drawings

50PIN PLASTIC TSOP(II) (400 mil)

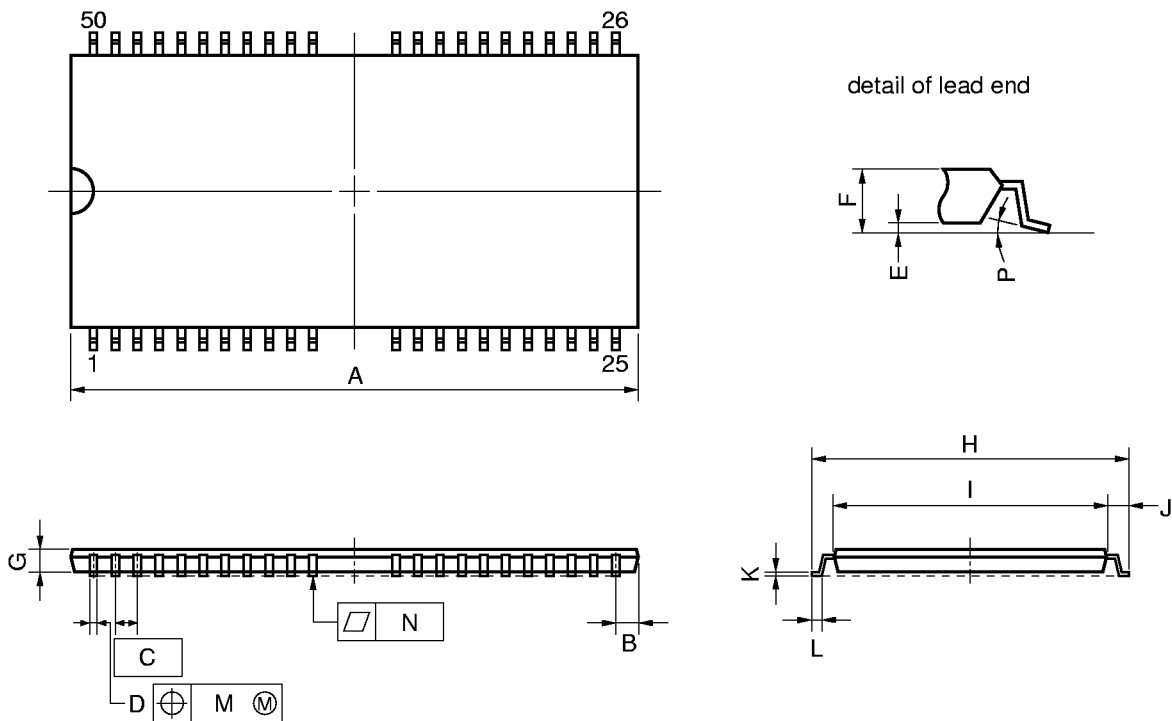


NOTE
Each lead centerline is located within 0.13 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	21.17 MAX.	0.834 MAX.
B	1.0 MAX.	0.040 MAX.
C	0.8 (T.P.)	0.031 (T.P.)
D	0.32 ^{+0.08} _{-0.07}	0.013±0.003
E	0.1±0.05	0.004±0.002
F	1.2 MAX.	0.048 MAX.
G	0.97	0.038
H	11.76±0.2	0.463±0.008
I	10.16±0.1	0.400±0.004
J	0.8±0.2	0.031 ^{+0.009} _{-0.008}
K	0.145 ^{+0.025} _{-0.015}	0.006±0.001
L	0.5±0.1	0.020 ^{+0.004} _{-0.005}
M	0.13	0.005
N	0.10	0.004
P	3° ^{+7°} _{-3°}	3° ^{+7°} _{-3°}

S50G5-80-7JF4

42 PIN PLASTIC SOJ (400 mil)

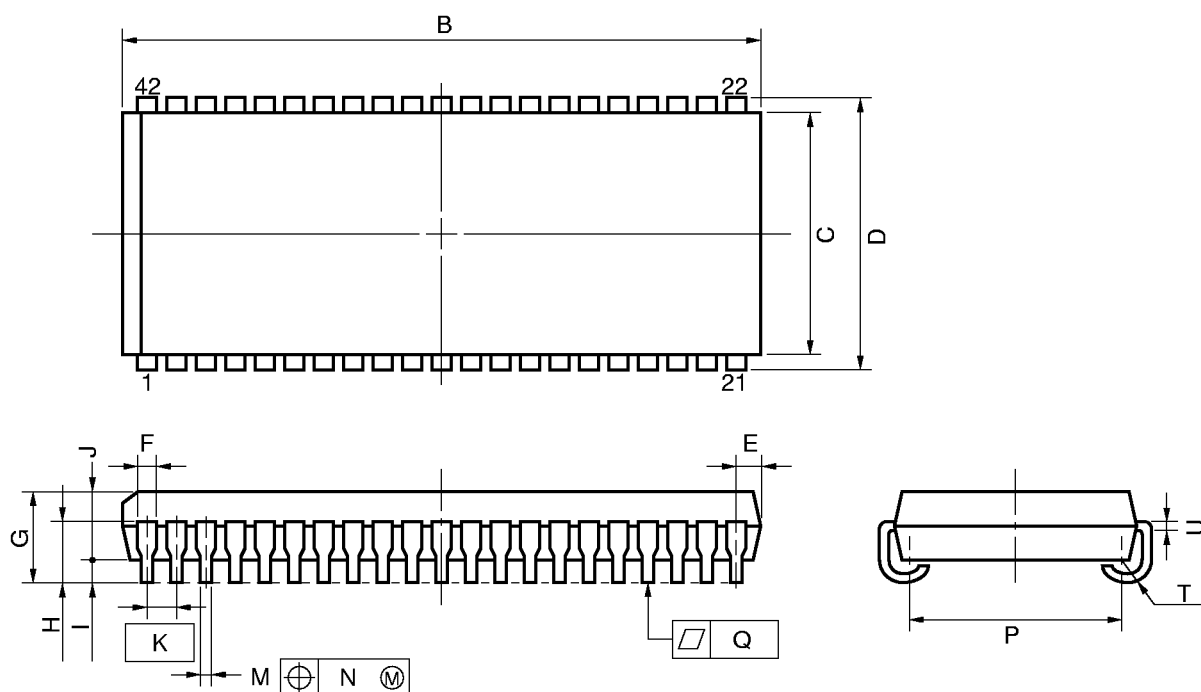**NOTE**

Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

P42LE-400A

ITEM	MILLIMETERS	INCHES
B	27.56 ^{+0.2} _{-0.35}	1.085 ^{+0.008} _{-0.014}
C	10.16	0.400
D	11.18±0.2	0.440±0.008
E	1.08±0.15	0.043 ^{+0.006} _{-0.007}
F	0.74	0.029
G	3.5±0.2	0.138±0.008
H	2.545±0.2	0.100±0.008
I	0.8 MIN.	0.031 MIN.
J	2.6	0.102
K	1.27 (T.P.)	0.050 (T.P.)
M	0.40±0.10	0.016 ^{+0.004} _{-0.005}
N	0.12	0.005
P	9.4±0.20	0.370±0.008
Q	0.10	0.004
T	R 0.85	R 0.033
U	0.20 ^{+0.10} _{-0.05}	0.008 ^{+0.004} _{-0.002}

★ Recommended Soldering Conditions

The following conditions (see tables below and next page) must be met for soldering conditions of the μPD42S18165, 4218165.

For more details, refer to our document “SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL” (C10535E).

Please consult with our sales offices in case other soldering process is used, or in case the soldering is done under different conditions.

Types of Surface Mount Device

μPD42S18165G5-7JF, 4218165G5-7JF: 50-pin plastic TSOP (II) (400 mil)

Soldering process	Soldering conditions	Symbol
Infrared ray reflow	Peak temperature of package surface: 235 °C or lower, Reflow time: 30 seconds or less (210 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (10 hours pre-baking is required at 125 °C afterwards)	IR35-107-3
VPS	Peak temperature of package: 215 °C or lower, Reflow time: 40 seconds or less (200 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (10 hours pre-baking is required at 125 °C afterwards)	VP15-107-3
Partial heating method	Terminal temperature: 300 °C or lower, Time: 3 seconds or lower (Per side of the package).	—

Note Exposure limit before soldering after dry-pack package is opened.

Storage conditions: 25 °C and relative humidity at 65 % or less.

Caution Do not apply more than one soldering method at any one time, except for “Partial heating method”.

μPD42S18165LE, 4218165LE: 42-pin plastic SOJ (400 mil)

Soldering process	Soldering conditions	Symbol
Infrared ray reflow	Peak temperature of package surface: 235 °C or lower, Reflow time: 30 seconds or less (210 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (20 hours pre-baking is required at 125 °C afterwards)	IR35-207-3
VPS	Peak temperature of package: 215 °C or lower, Reflow time: 40 seconds or less (200 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (20 hours pre-baking is required at 125 °C afterwards)	VP15-207-3
Partial heating method	Terminal temperature: 300 °C or lower, Time: 3 seconds or less (Per side of the package).	—

Note Exposure limit before soldering after dry-pack package is opened.
Storage conditions: 25 °C and relative humidity at 65 % or less.

Caution Do not apply more than one soldering method at any one time, except for “Partial heating method”.