

UR6225

CMOS IC

POSITIVE VOLTAGE REGULATOR

■ DESCRIPTION

The UTC **UR6225** is a positive voltage output, three-pin regulator, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The UTC **UR6225** consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series.

■ FEATURES

- * Maximum output current: 250mA
(within max. power dissipation, $V_{OUT} = 5.0V$)
- * Output voltage range: 1.2V ~ 6.0V in 0.1V increments
(1.2V ~ 1.9V for custom products)
- * Highly accurate: output voltage $\pm 2\%$
($\pm 1\%$ for semi-custom products)
- * Low power consumption: Typ. $2.0\mu A$ @ $V_{OUT}=5.0V$
- * Output voltage temperature characteristics :
Typ. $\pm 100ppm/V$
- * Input stability : Typ. $0.2\%/V$
- * Small input-output differential :
 $I_{OUT} = 100mA$ @ $V_{OUT} = 5.0V$ with a 0.12V differential.
- * Over temperature protection

■ ORDERING INFORMATION

Order Number		Package	Pin Assignment					Packing
Normal	Lead Free Plating		1	2	3	4	5	
UR6225-xx-AB3-C-R	UR6225L-xx-AB3-C-R	SOT-89	G	I	O	-	-	Tape Reel
UR6225-xx-AE3-3-R	UR6225L-xx-AE3-3-R	SOT-23	O	G	I	-	-	Tape Reel
UR6225-xx-AF5-F-R	UR6225L-xx-AF5-F-R	SOT-25	G	I	O	N	N	Tape Reel
UR6225-xx-T92-C-K	UR6225L-xx-T92-C-K	TO-92	G	I	O	-	-	Bulk
UR6225-xx-T92-C-B	UR6225L-xx-T92-C-B	TO-92	G	I	O	-	-	Tape Box

Note: Pin Assignment: I: V_{IN} O: V_{OUT} G: V_{SS} N: No Connection


xx: Output Voltage, refer to Marking Information.

UR6225L-xx-AB3-C-R	(1)Packing Type (2)Pin Assignment (3)Package Type (4)Output Voltage Code (5)Lead Plating	(1) R:Tape Reel, K:Bulk, B:Tape Box (2) refer to Pin Assignment (3) AB3:SOT-89, AE3:SOT-23, AF5:SOT-25, T92:TO-92 (4) xx:refer to Marking Information (5) L:Lead Free Plating, Blank:Pb/Sn
--------------------	--	--

■ MARKING INFORMATION

PACKAGE	VOLTAGE CODE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 4	MARKING
SOT-89	12:1.2V	V _{SS}	V _{IN}	V _{OUT}	-	-	
	15:1.5V						
SOT-25	18:1.8V	V _{SS}	V _{IN}	V _{OUT}	NC	NC	
	20:2.0V						
SOT-23	21:2.1V	V _{OUT}	V _{SS}	V _{IN}	-	-	
	25:2.5V						
TO-92	26:2.6V	V _{SS}	V _{IN}	V _{OUT}	-	-	
	27:2.7V						
	28:2.8V						
	2J:2.85V						
	30:3.0V						
	33:3.3V						
	35:3.5V						
	40:4.0V						
	45:4.5V						
	50:5.0V						
	60:6.0V						

■ BLOCK DIAGRAM

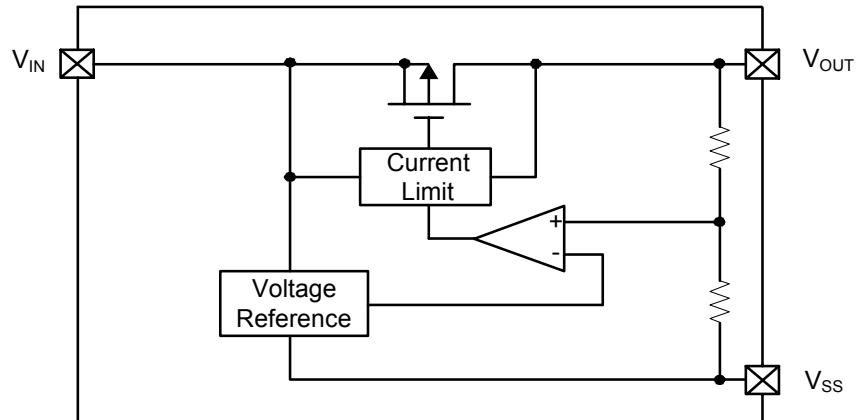

■ ABSOLUTE MAXIMUM RATING (Ta=25 °C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	12	V
Output Current	I _{OUT}	500	mA
Output Voltage	V _{OUT}	V _{SS} -0.3 ~ V _{IN} +0.3	V
Continuous Total Power Dissipation	SOT-25	P _D	150
	SOT-23		150
	SOT-89		500
	TO-92		300
Junction Temperature	T _J	+125	
Operating Temperature	T _{OPR}	-40 ~ +85	
Storage Temperature	T _{STG}	-40 ~ +150	

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta=25 °C, unless otherwise specified)

UR6225-6.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V _{OUT} (E)(Note2)	I _{OUT} =40mA, V _{IN} =7.0V	5.880	6.000	6.120	V
Maximum Output Current	1	I _{OUT(MAX)}	V _{IN} =7.0V V _{OUT} (E)≥4.5V	250			mA
Load Stability	1	V _{OUT}	V _{IN} =7.0V 1mA≤I _{OUT} ≤100mA		40	80	mV
Input-Output Voltage Differential(Note3)	1	V _{DIF1}	I _{OUT} =100mA		120	300	mV
	1	V _{DIF2}	I _{OUT} =200mA		380	600	mV
Supply Current	2	I _{SS}	V _{IN} =7.0V		2.0	4.5	µA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	I _{OUT} =40mA 7.0V≤V _{IN} ≤10.0V		0.2	0.3	%/V
Input Voltage		V _{IN}				10	V
Thermal Shutdown						150	
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	I _{OUT} =40mA -40 ≤ T _{OPR} ≤85		±100		ppm/

UR6225-5.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V _{OUT} (E)(Note2)	I _{OUT} =40mA, V _{IN} =6.0V	4.900	5.000	5.100	V
Maximum Output Current	1	I _{OUT(MAX)}	V _{IN} =6.0V V _{OUT} (E)≥4.5V	250			mA
Load Stability	1	V _{OUT}	V _{IN} =6.0V 1mA≤I _{OUT} ≤100mA		40	80	mV
Input-Output Voltage Differential(Note3)	1	V _{DIF1}	I _{OUT} =100mA		120	300	mV
	1	V _{DIF2}	I _{OUT} =200mA		380	600	mV
Supply Current	2	I _{SS}	V _{IN} =6.0V		2.0	4.5	µA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	I _{OUT} =40mA 6.0V≤V _{IN} ≤10.0V		0.2	0.3	%/V
Input Voltage		V _{IN}				10	V
Thermal Shutdown						150	
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	I _{OUT} =40mA -40 ≤ T _{OPR} ≤85		±100		ppm/

■ ELECTRICAL CHARACTERISTICS(Cont.) ($T_a=25^\circ C$, unless otherwise specified)

UR6225-4.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=5.5V$	4.410	4.500	4.59	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=5.5V, V_{OUT}(E)\geq 3.6V$	200			mA
Load Stability	1	V_{OUT}	$V_{IN}=5.5V$ $1mA\leq I_{OUT}\leq 100mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=100mA$		170	330	mV
	1	V_{DIF2}	$I_{OUT}=200mA$		400	630	mV
Supply Current	2	I_{SS}	$V_{IN}=5.5V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $5.5V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-4.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=5.0V$	3.920	4.000	4.080	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=5.0V, V_{OUT}(E)\geq 3.6V$	200			mA
Load Stability	1	V_{OUT}	$V_{IN}=5.0V$ $1mA\leq I_{OUT}\leq 100mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=100mA$		170	330	mV
	1	V_{DIF2}	$I_{OUT}=200mA$		400	630	mV
Supply Current	2	I_{SS}	$V_{IN}=5.0V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $5.0V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-3.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=4.5V$	3.430	3.500	3.570	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=4.5V, V_{OUT}(E)\geq 2.97V$	165			mA
Load Stability	1	V_{OUT}	$V_{IN}=4.5V$ $1mA\leq I_{OUT}\leq 86mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=86mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=172mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=4.5V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $4.5V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

■ ELECTRICAL CHARACTERISTICS(Cont.) ($T_a=25^\circ C$, unless otherwise specified)

UR6225-3.3V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=4.3V$	3.234	3.300	3.366	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=4.3V, V_{OUT}(E)\geq 2.97V$	165			mA
Load Stability	1	V_{OUT}	$V_{IN}=4.3V$ $1mA\leq I_{OUT}\leq 86mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=86mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=172mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=4.3V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $4.3V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-3.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=4.0V$	2.940	3.000	3.060	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=4.0V, V_{OUT}(E)\geq 2.7V$	150			mA
Load Stability	1	V_{OUT}	$V_{IN}=4.0V$ $1mA\leq I_{OUT}\leq 80mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=80mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=160mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=4.0V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $4.0V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-2.85V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.85V$	2.793	2.85	2.907	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.85V, V_{OUT}(E)\geq 2.565V$	150			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.85V$ $1mA\leq I_{OUT}\leq 77mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=77mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=154mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.85V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.85V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

■ ELECTRICAL CHARACTERISTICS(Cont.) ($T_a=25^\circ C$, unless otherwise specified)

UR6225-2.8V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.8V$	2.744	2.800	2.856	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.8V, V_{OUT}(E)\geq 2.52V$	150			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.8V$ $1mA\leq I_{OUT}\leq 76mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=76mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=152mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.8V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.8V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-2.7V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.7V$	2.646	2.700	2.754	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.7V, V_{OUT}(E)\geq 2.52V$	150			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.7V$ $1mA\leq I_{OUT}\leq 76mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=76mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=152mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.7V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.7V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-2.6V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.6V$	2.548	2.600	2.652	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.6V, V_{OUT}(E)\geq 2.34V$	150			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.6V$ $1mA\leq I_{OUT}\leq 72mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=72mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=144mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.6V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.6V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

■ ELECTRICAL CHARACTERISTICS(Cont.) ($T_a=25^\circ C$, unless otherwise specified)

UR6225-2.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.5V$	2.45	2.500	2.55	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.5V, V_{OUT}(E)\geq 2.25V$	125			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.5V$ $1mA\leq I_{OUT}\leq 70mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=70mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=140mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.5V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.5V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-2.1V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.1V$	2.058	2.100	2.142	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.1V, V_{OUT}(E)\geq 1.89V$	125			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.1V$ $1mA\leq I_{OUT}\leq 62mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=62mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=124mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.1V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.1V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-2.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=3.0V$	1.960	2.000	2.040	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=3.0V, V_{OUT}(E)\geq 1.8V$	100			mA
Load Stability	1	V_{OUT}	$V_{IN}=3.0V$ $1mA\leq I_{OUT}\leq 60mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=60mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=120mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=3.0V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $3.0V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

■ ELECTRICAL CHARACTERISTICS(Cont.) ($T_a=25^\circ C$, unless otherwise specified)

UR6225-1.8V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=2.8V$	1.764	1.800	1.836	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=2.8V, V_{OUT}(E)\geq 1.62V$	100			mA
Load Stability	1	V_{OUT}	$V_{IN}=2.8V$ $1mA\leq I_{OUT}\leq 60mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=56mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=112mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=2.8V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $2.8V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-1.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=2.5V$	1.470	1.500	1.530	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=2.5V, V_{OUT}(E)\geq 1.62V$	100			mA
Load Stability	1	V_{OUT}	$V_{IN}=2.5V$ $1mA\leq I_{OUT}\leq 60mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=56mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=112mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=2.5V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $2.5V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

UR6225-1.2V (Note1)


PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$ (Note2)	$I_{OUT}=40mA, V_{IN}=2.5V$	1.176	1.200	1.224	V
Maximum Output Current	1	$I_{OUT(MAX)}$	$V_{IN}=2.2V, V_{OUT}(E)\geq 1.62V$	100			mA
Load Stability	1	V_{OUT}	$V_{IN}=2.2V$ $1mA\leq I_{OUT}\leq 60mA$		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF1}	$I_{OUT}=56mA$		180	360	mV
	1	V_{DIF2}	$I_{OUT}=112mA$		400	700	mV
Supply Current	2	I_{SS}	$V_{IN}=2.2V$		2.0	4.5	μA
Input Stability	1	$\frac{V_{OUT}}{V_{IN} \times V_{OUT}}$	$I_{OUT}=40mA$ $2.2V\leq V_{IN}\leq 10.0V$		0.2	0.3	%/V
Input Voltage		V_{IN}				10	V
Thermal Shutdown					150		
Output Voltage Temperature Characteristics	1	$\frac{V_{OUT}}{T_{OPR} \times V_{OUT}}$	$I_{OUT}=40mA$ $-40^\circ C \leq T_{OPR} \leq 85^\circ C$		± 100		ppm/

Note:


1. $V_{OUT}(T)$ =Specified Output Voltage.
2. $V_{OUT}(E)$ =Effective Output Voltage (i.e. the output voltage when " $V_{OUT}(T)+1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).
3. $V_{DIF} = \{V_{IN1}^{(Note4)} - V_{OUT}(E)\}$
4. V_{IN1} = The input voltage at the time 98% of $V_{OUT}(E)$ is output (input voltage has been gradually reduced).

■ TEST CIRCUITS


Circuit 1

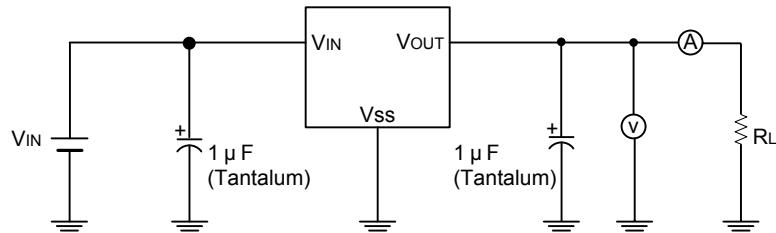


Circuit 2

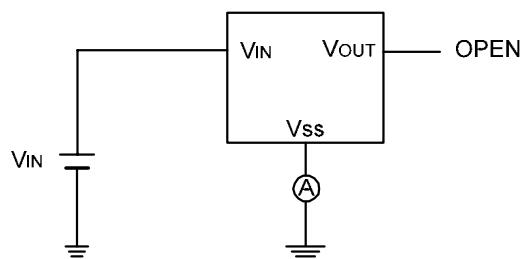





■ TYPICAL APPLICATION CIRCUIT

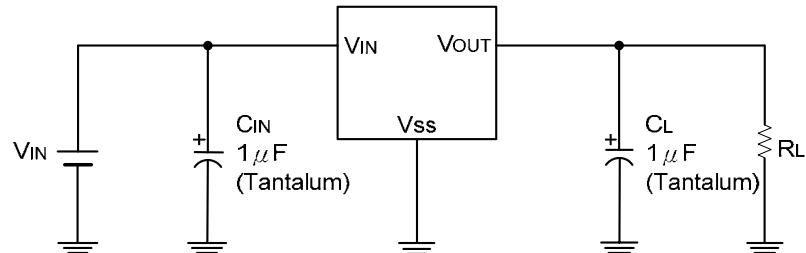

■ TYPICAL CHARACTERISTIC

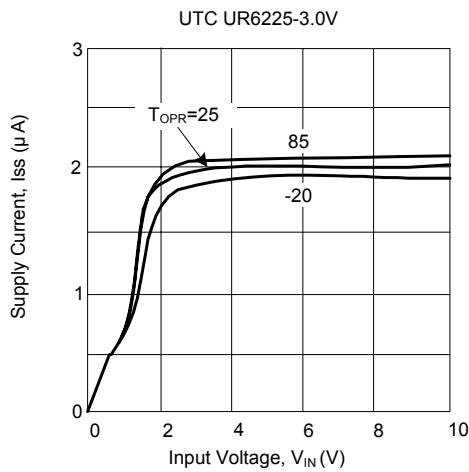


(1) OUTPUT VOLTAGE VS. OUTPUT CURRENT

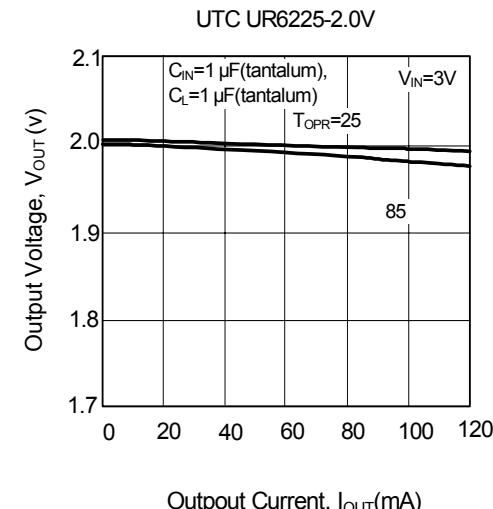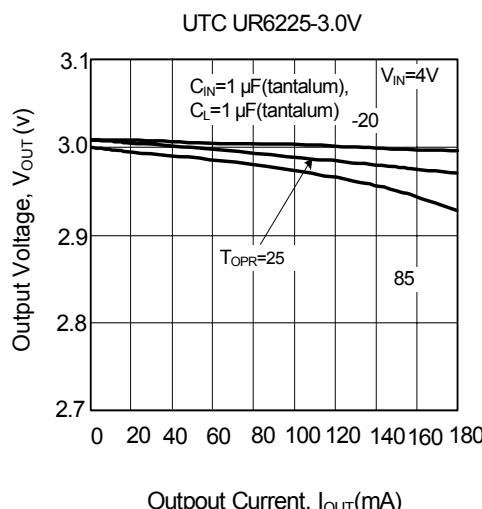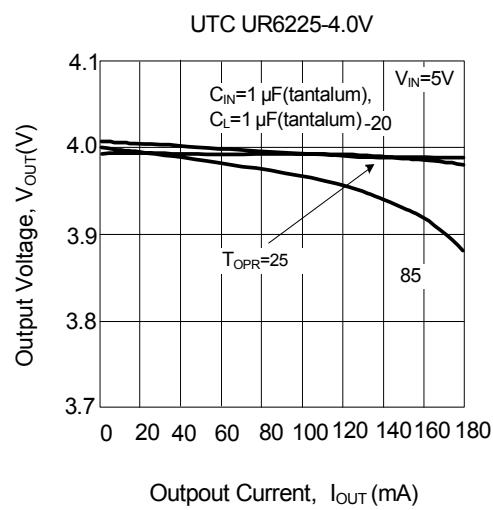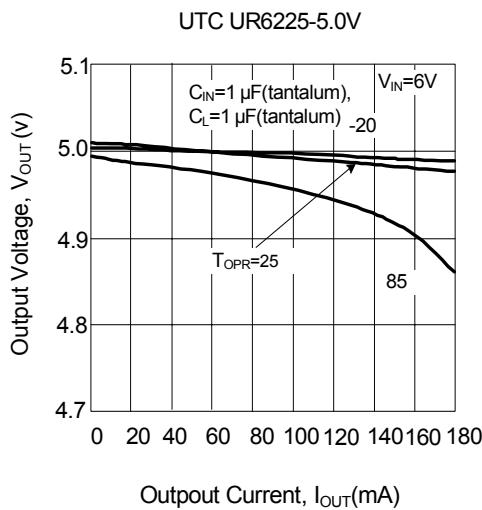


■ TYPICAL CHARACTERISTIC(Cont.)

(2) OUTPUT VOLTAGE VS. INPUT VOLTAGE


UTC UR6225-5.0V

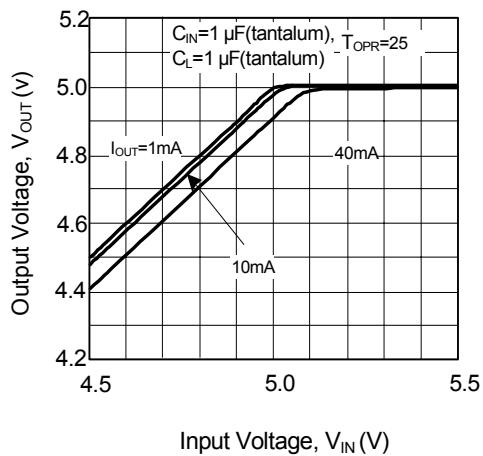


UTC UR6225-5.0V

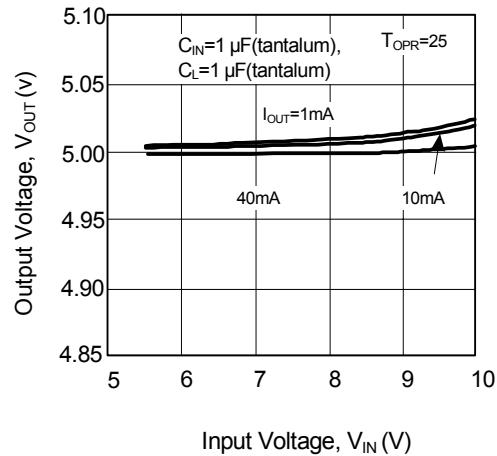


UTC UR6225-4.0V

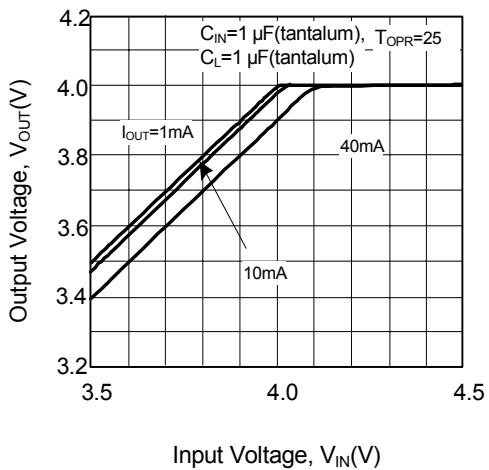


UTC UR6225-4.0V

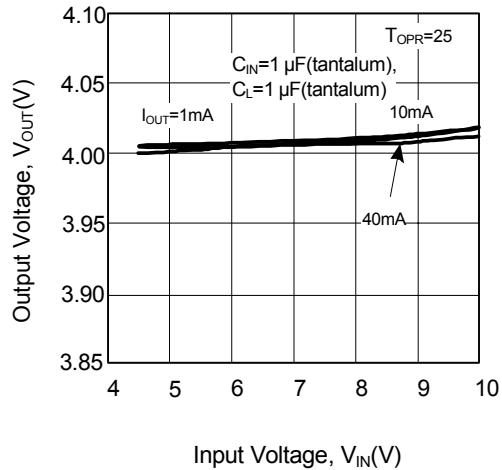



UTC UR6225-3.0V

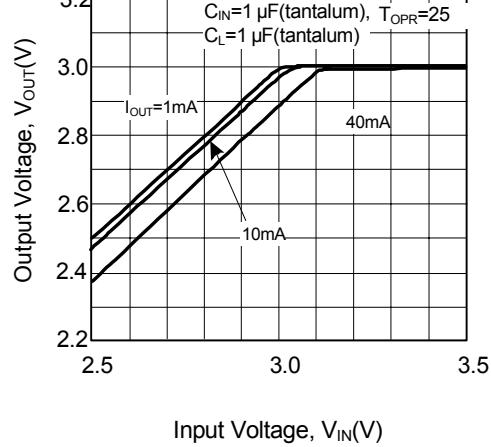





UTC UR6225-3.0V

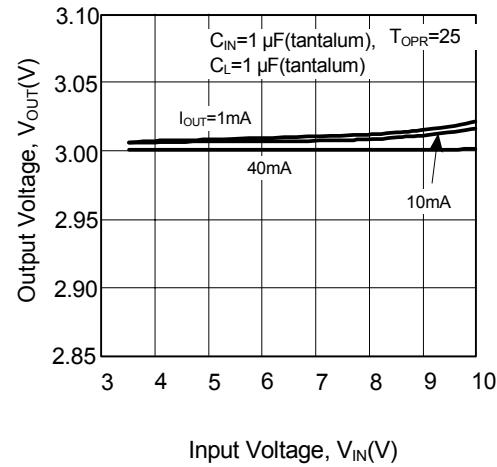

■ TYPICAL CHARACTERISTIC(Cont.)





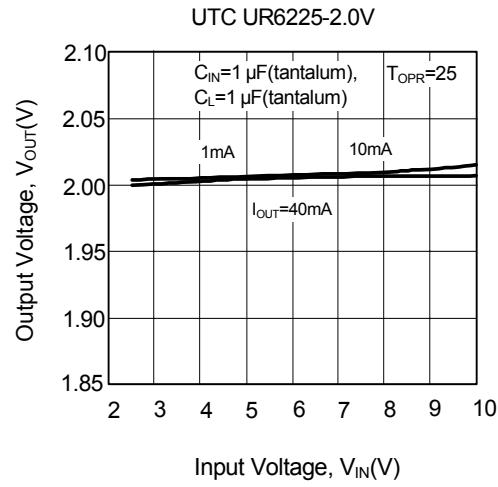
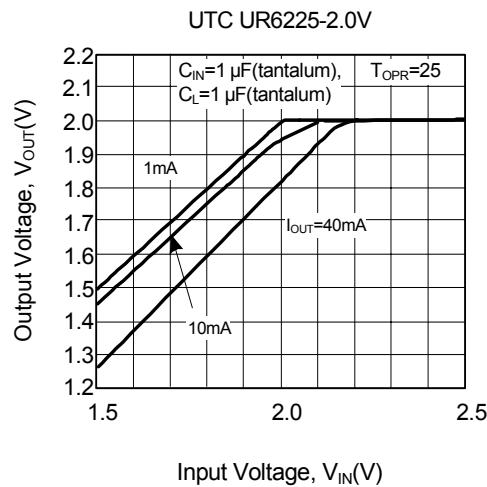


(3) INPUT/OUTPUT VOLTAGE DIFFERENTIAL VS. OUTPUT CURRENT

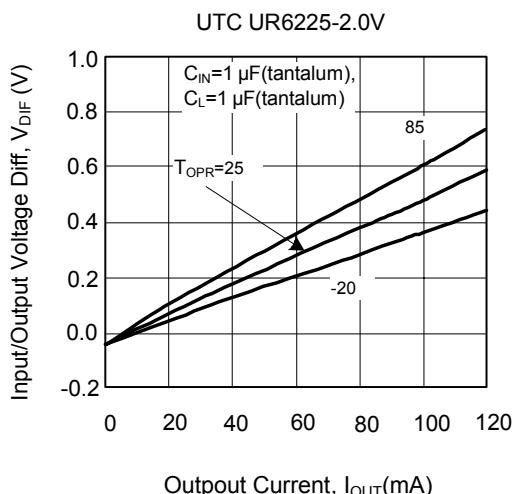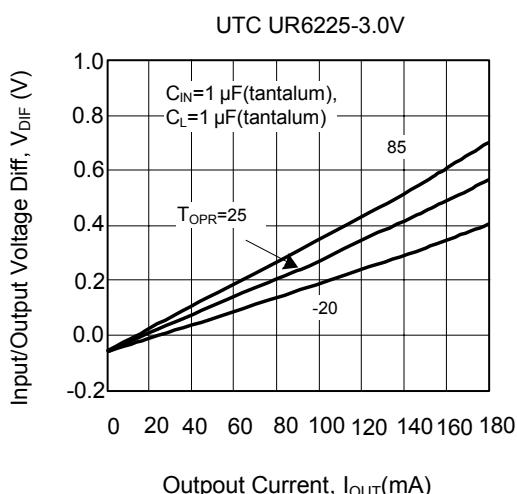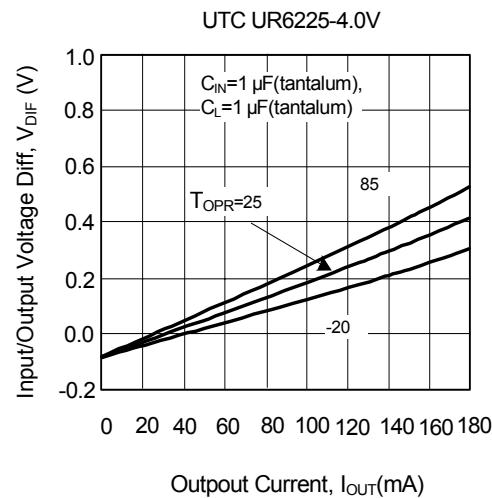
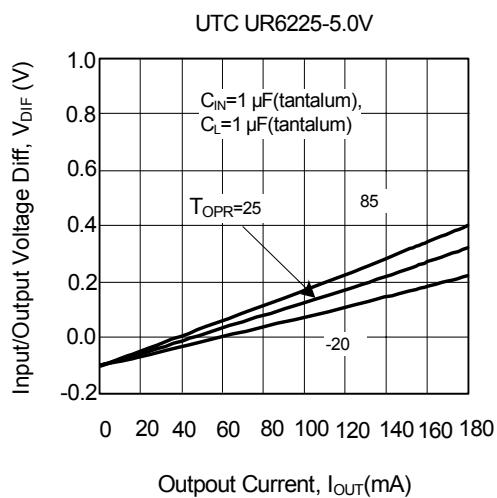


■ TYPICAL CHARACTERISTIC(Cont.)





(4) SUPPLY CURRENT VS. INPUT VOLTAGE

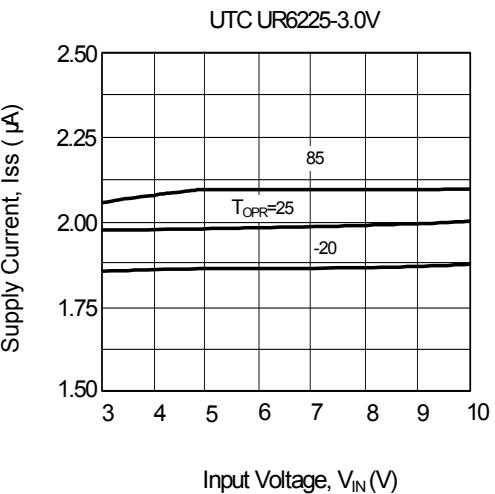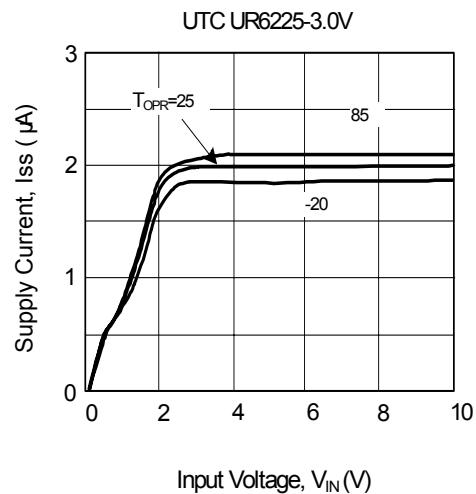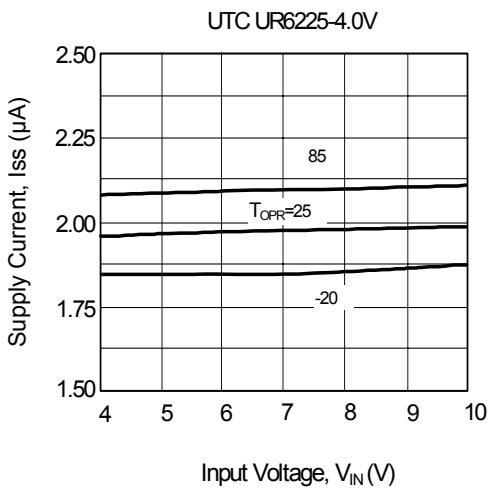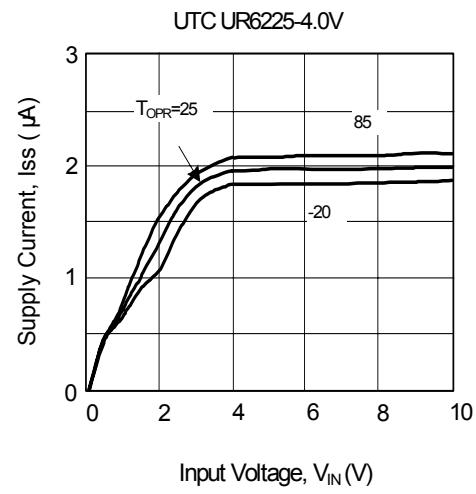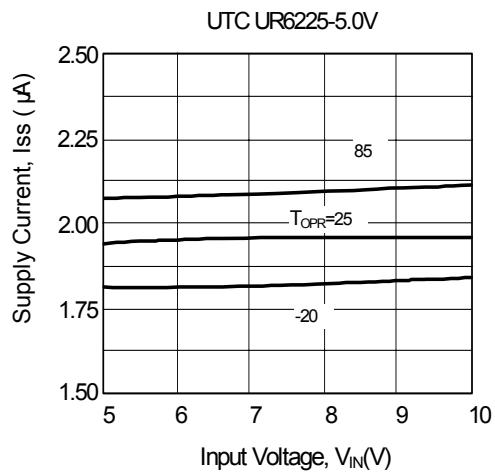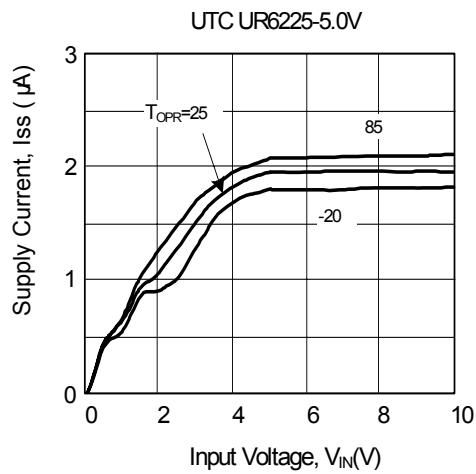

■ TYPICAL CHARACTERISTIC(Cont.)



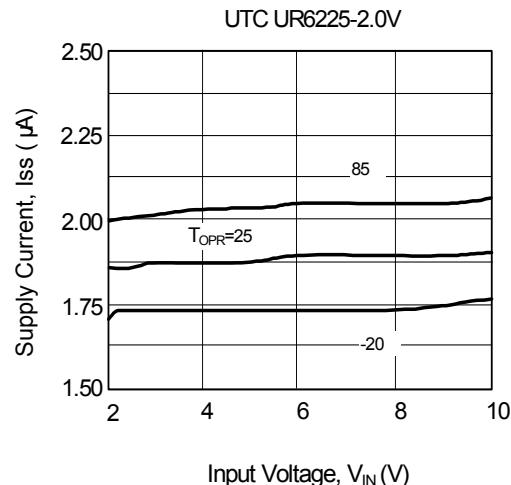
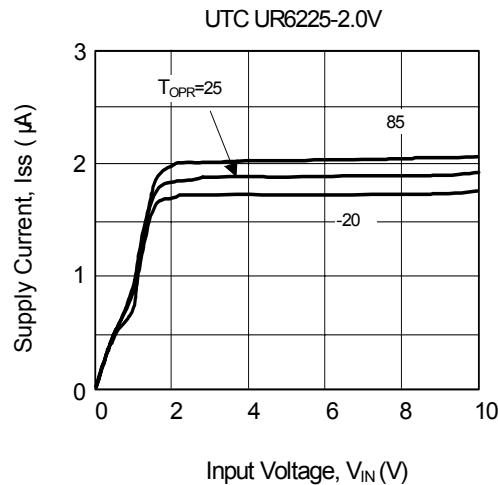


(5) OUTPUT VOLTAGE VS. AMBIENT TEMPERATURE

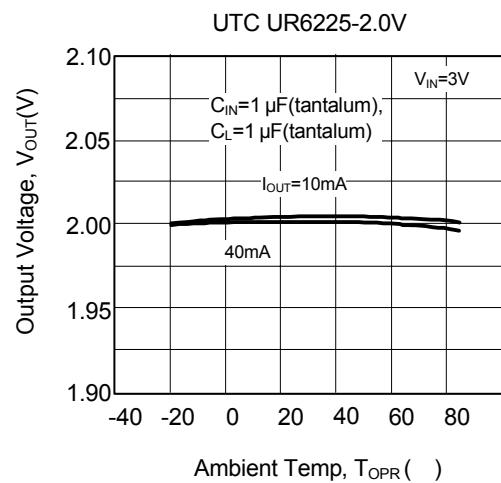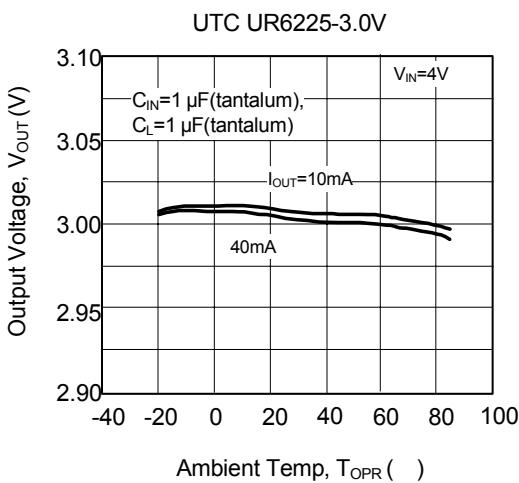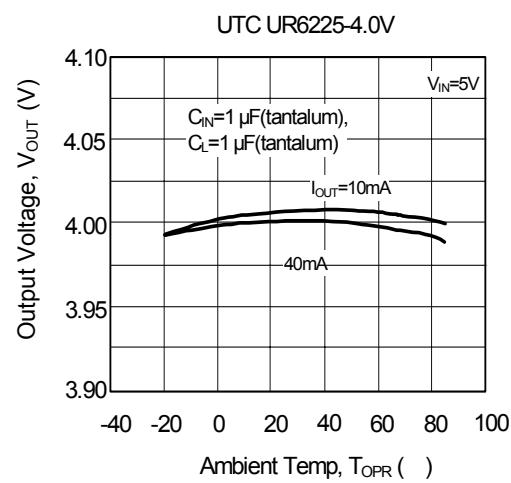
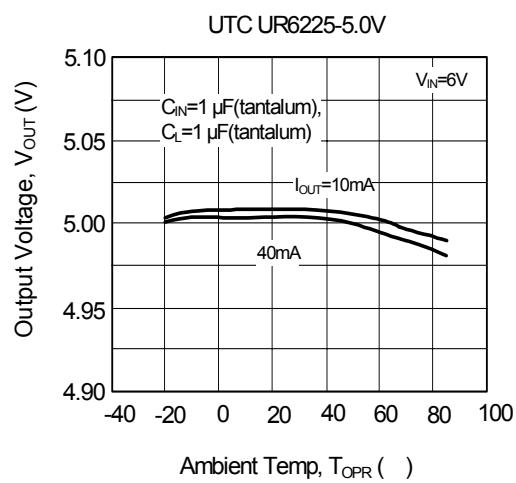


■ TYPICAL CHARACTERISTIC(Cont.)







(6) SUPPLY CURRENT VS. AMBIENT TEMPERATURE

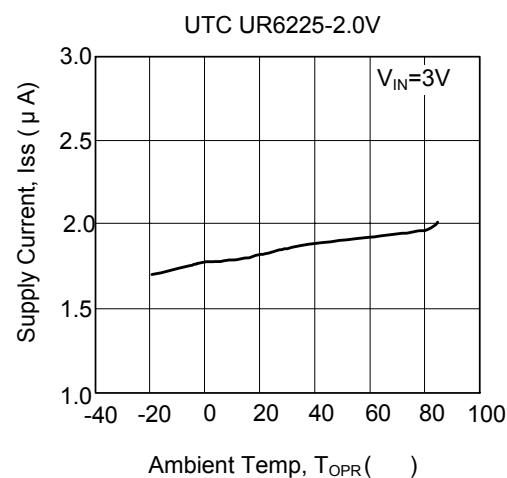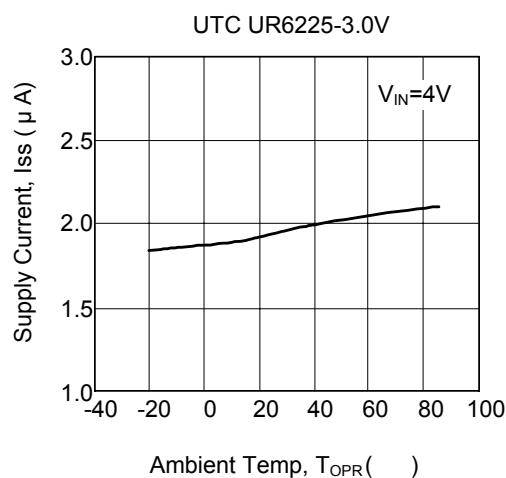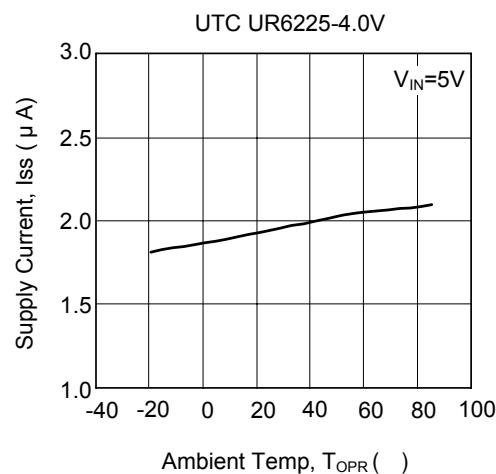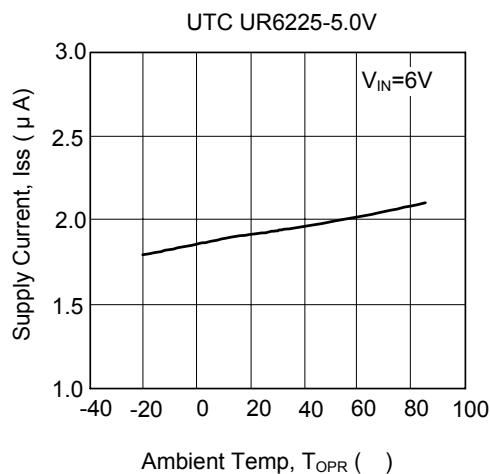

(7) INPUT TRANSIENT RESPONSE 1





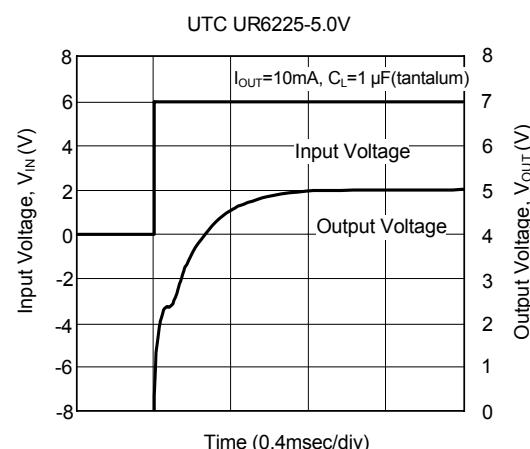
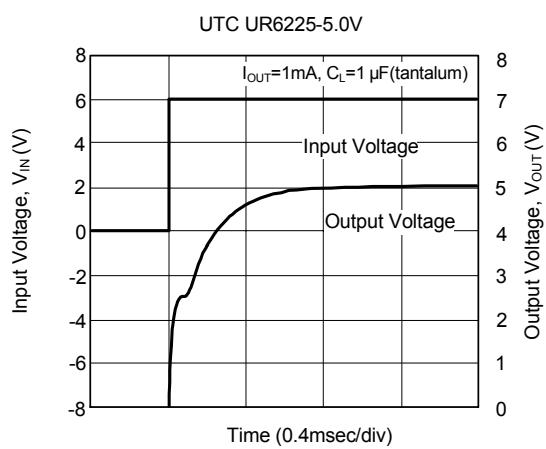


■ TYPICAL CHARACTERISTIC(Cont.)

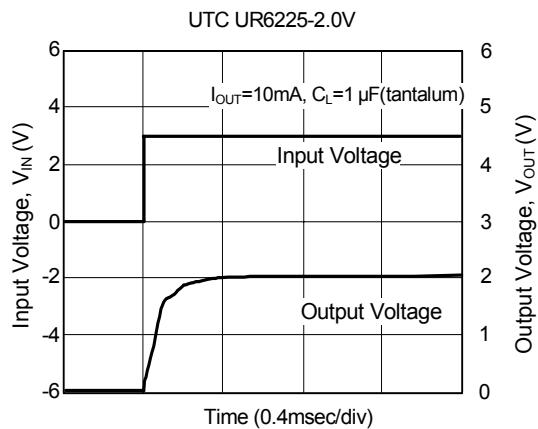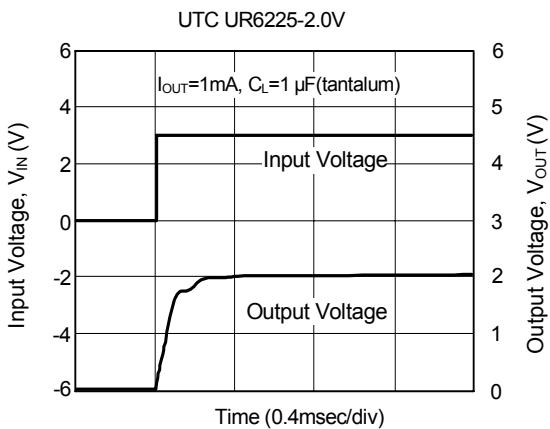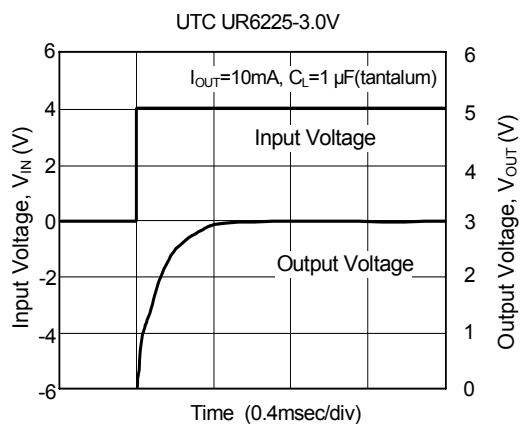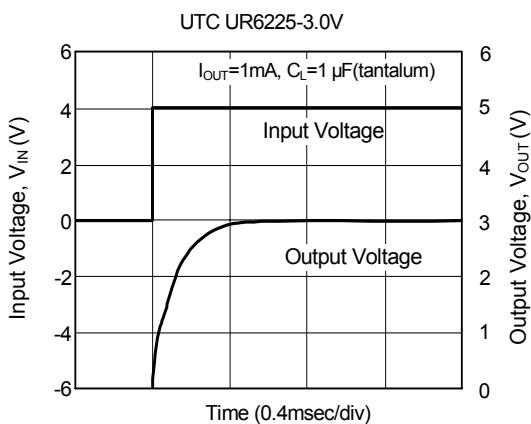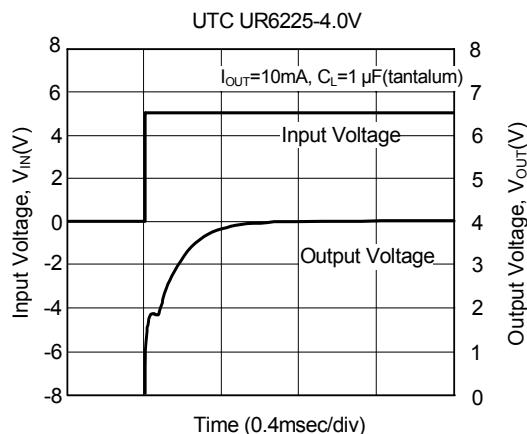
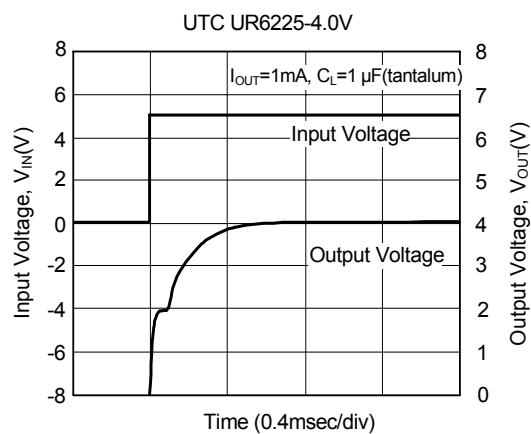


■ TYPICAL CHARACTERISTIC(Cont.)





(8) INPUT TRANSIENT RESPONSE 2

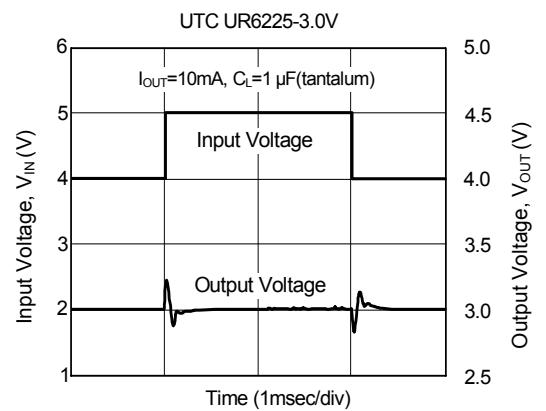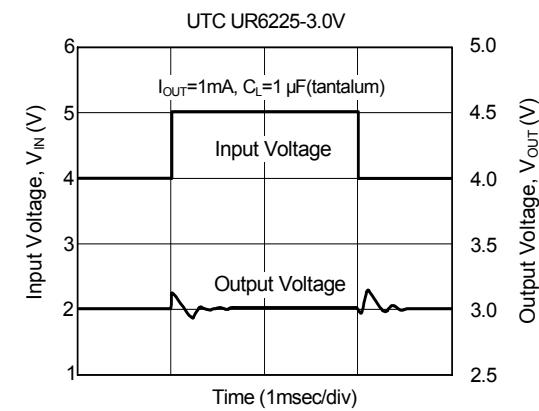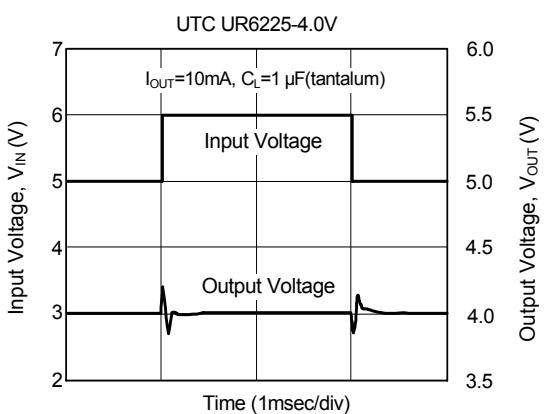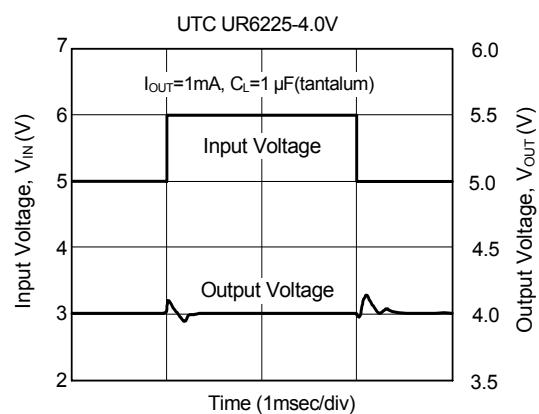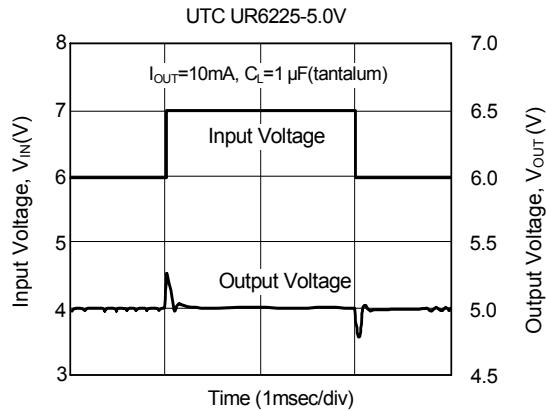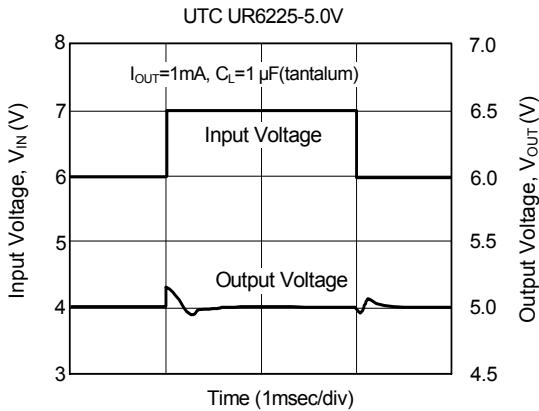

■ TYPICAL CHARACTERISTIC(Cont.)



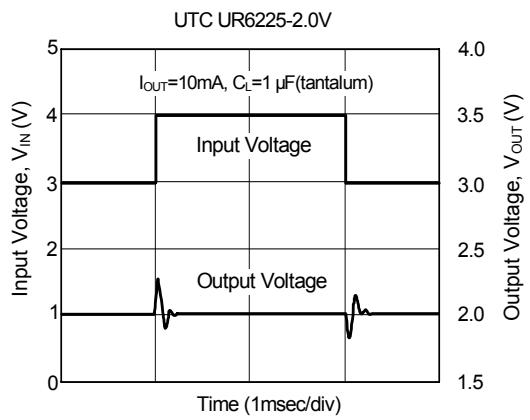
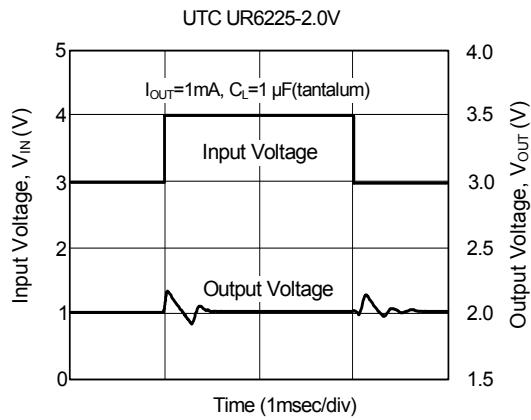


(9) LOAD TRANSIENT RESPONSE

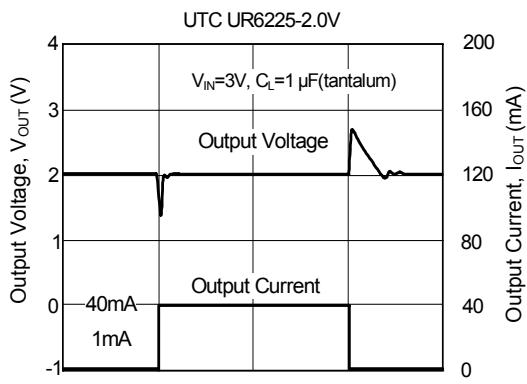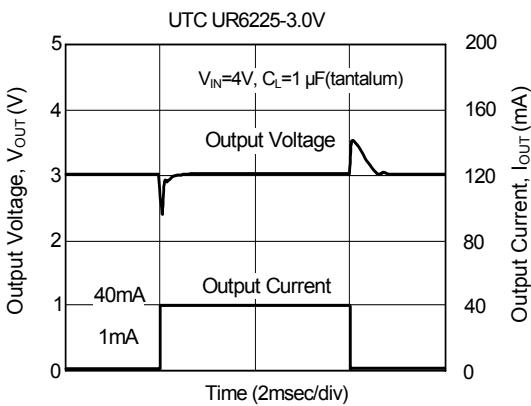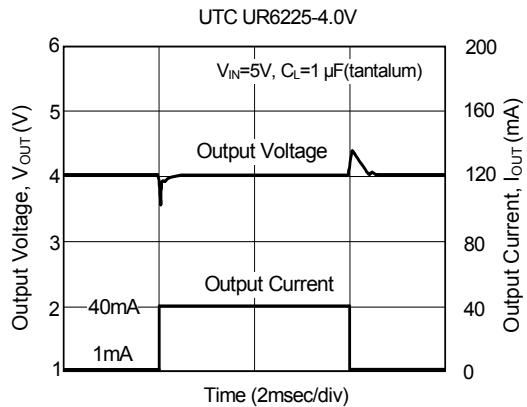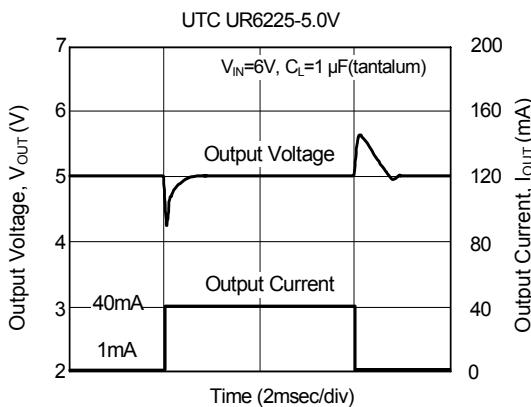

■ TYPICAL CHARACTERISTIC(Cont.)

(10) RIPPLE REJECTION RATE

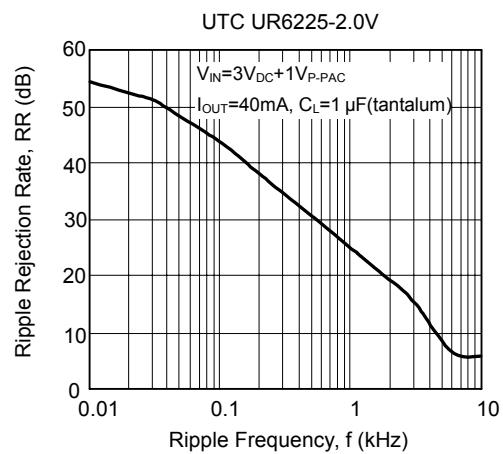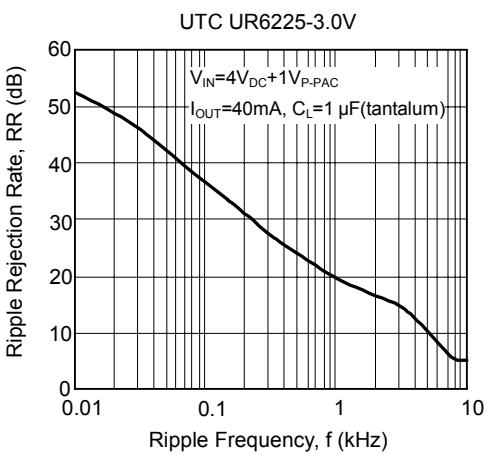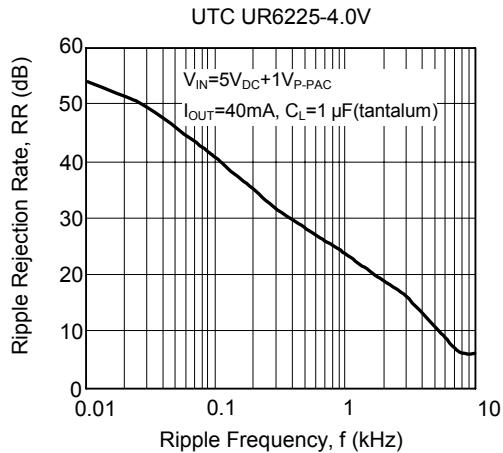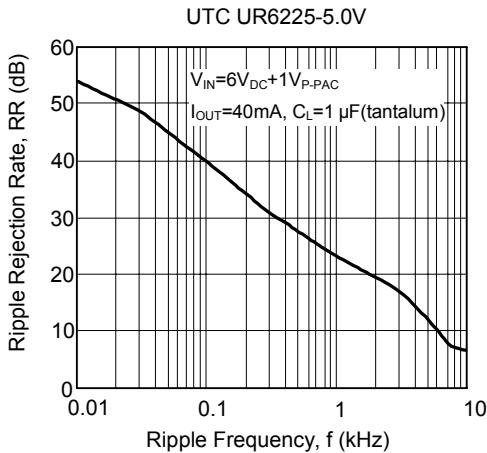

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.