

EPA3193S


- 2000 Vrms Isolation •
- Package in Tubes or Tape and Reel •

Electrical Parameters @ 25° C


Primary OCL (mH Min.)	Leakage Inductance (μ H Max.)	Interwinding Capacitance (pF Max.)	DCR (Ω Max.)
@ 100 KHz, 100 m Vrms	T1 & T2	Between Pri & Sec. winding	---
1.2	0.80 & 0.50	35	0.80
Pins 1-2 & 7-8	@Pri. with Sec. shorted	---	Pins 1-2 or Pins 7-8

• *For 60 seconds • Lead Coplanarity .003 at seating plane •

Schematic

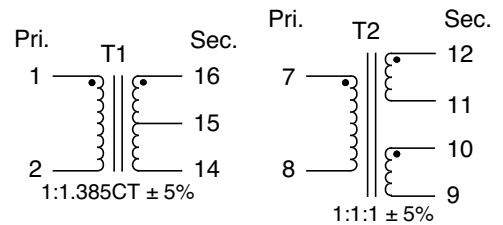

Package

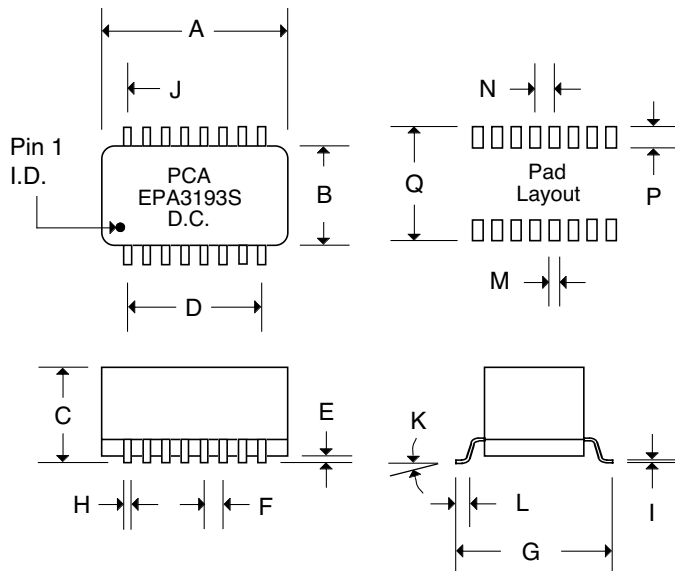

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.480	.500	.490	12.19	12.70	12.45
B	.260	.280	.270	6.60	7.11	6.86
C	.230	.250	.240	5.84	6.35	6.10
D	---	---	.350	---	---	8.89
E	.005	.015	.010	.127	.381	.254
F	---	---	.050	---	---	1.27
G	.370	.390	.380	9.40	9.91	9.65
H	.018	.022	.020	.457	.559	.508
I	---	---	.010	---	---	.254
J	---	---	.070	---	---	1.78
K	0°	8°	---	0°	8°	---
L	.025	.045	.035	.635	1.14	.889
M	---	---	.030	---	---	.762
N	---	---	.050	---	---	1.27
P	---	---	.085	---	---	2.29
Q	---	---	.440	---	---	10.92