

# Surface Mount Power Splitter/Combiner

## SP-2C+

2 Way-0° 50Ω

780 to 960 MHz



### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.

### Pin Connections

SUM PORT	5
PORT 1	1
PORT 2	3
GROUND	2,4,6

### Features

- low insertion loss, 0.4 dB typ.
- good isolation, 28 dB typ.
- excellent VSWR, 1.20:1 typ.
- excellent power handling, 1.5W
- small size
- aqueous washable

### Applications

- cellular
- GSM
- Land Mobile
- ISM
- PDC

CASE STYLE: CA531  
PRICE: \$ 0.99 ea. QTY (25)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
	Typ.	Min.	Typ.	Max.			S-Port Typ.	Output Ports Typ.
780-960	28	17	0.4	0.6	2	0.2	1.20	1.20

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
780.00	3.37	3.38	0.01	22.00	0.05	1.22	1.11	1.11
800.00	3.37	3.38	0.01	24.99	0.04	1.20	1.11	1.11
820.00	3.37	3.38	0.01	29.45	0.04	1.18	1.13	1.12
840.00	3.37	3.38	0.01	37.94	0.04	1.17	1.14	1.14
860.00	3.37	3.38	0.01	36.99	0.04	1.16	1.16	1.16
870.00	3.38	3.38	0.01	32.35	0.04	1.16	1.18	1.18
880.00	3.38	3.39	0.01	29.21	0.04	1.17	1.19	1.19
890.00	3.38	3.39	0.01	26.90	0.05	1.17	1.20	1.20
900.00	3.39	3.39	0.01	25.08	0.04	1.17	1.22	1.21
910.00	3.39	3.40	0.01	23.59	0.04	1.18	1.23	1.23
920.00	3.40	3.40	0.01	22.33	0.04	1.19	1.25	1.24
930.00	3.40	3.41	0.01	21.24	0.03	1.20	1.26	1.26
940.00	3.41	3.42	0.01	20.29	0.03	1.21	1.27	1.27
950.00	3.42	3.43	0.01	19.43	0.02	1.23	1.29	1.29
960.00	3.43	3.43	0.01	18.66	0.02	1.24	1.30	1.30


### Outline Drawing

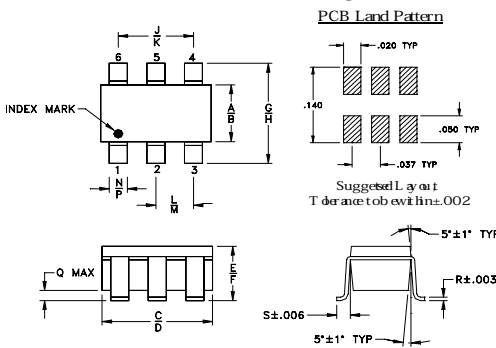




### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
.052	.067	.106	.122	.035	.064	.087	.118	.067	.083	.033	.042	.012	.020	.012	.006	.018	grams
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70	2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020


### Demo Board MCL P/N: TB-374 Suggested PCB Layout (PL-232)



- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

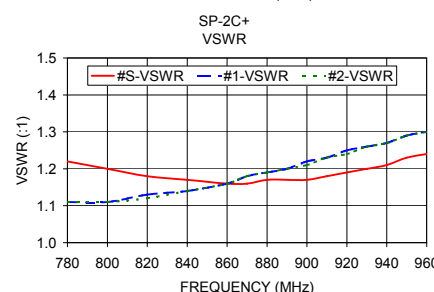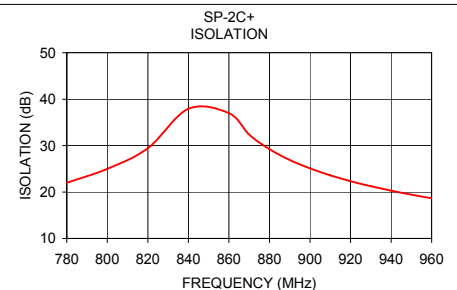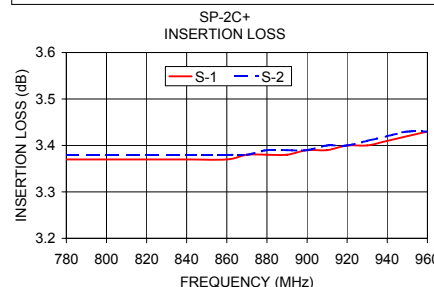

### electrical schematic

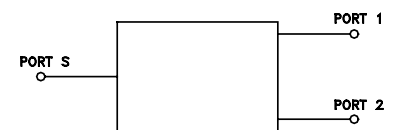

### ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001  
Machine Model (MM): Class M1 (< 100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. A  
M107210  
ED-12348C/1+  
SP-2C+  
P/I/L/C/P/AM  
070420