

SUBMINIATURE FUSE HOLDERS

- Fuse holders allow for quick changing of subminiature fuses
- Ideal for high density circuit board applications
- Standard or low profile versions available
- Reliable spring tension assures low contact resistance

SPECIFICATIONS

Base: Thermoplastic, UL Rated 94V-0

Springs: Beryllium Copper, Gold Plate

Pins: Brass, Tin Plate


Current Rating: 5 Amps @ 250V AC

For .335 (8.5) × .158 (4.0) FUSE

For Littelfuse 392/395 Type TE5®
Bussmann: PC Series

STURDI-MOUNT


- Securely mounts to PCB
- Barrier protects leads from arcing



CAT. NO. 3552


SPACE SAVER

- Designed to maximize PC Board Capacity
- Allows components to be placed underneath the holder
- Ideal when board space is more important than board height



CAT. NO. 3553

Mounting Detail




For .335 (8.5) DIA. FUSE

For Littelfuse 370 Type TR5®
Bussmann: BK-EFF series

STURDI-MOUNT


- Securely mounts to PCB
- Lead-in chamfer body aides in fuse assembly

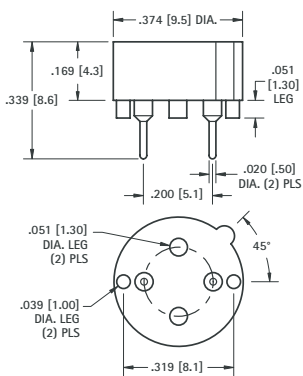

CAT. NO. 3556


LOW PROFILE

- Securely mounts to PCB

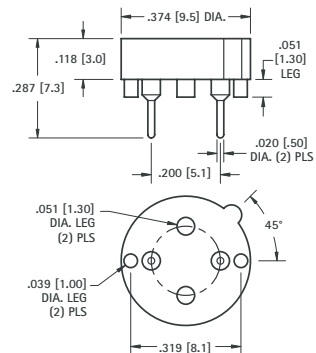

CAT. NO. 3554

Mounting Detail



NOTES
