

## HIGH VOLTAGE FASTSWITCHING NPN POWER TRANSISTOR

- SGS-THOMSON PREFERRED SALES TYPE
- HIGH VOLTAGE CAPABILITY
- U.L. RECOGNISED ISOWATT218 PACKAGE (U.L. FILE # E81734 (N)).



**APPLICATIONS:**

- HORIZONTAL DEFLECTION FOR COLOUR TV
- SWITCH MODE POWER SUPPLIES

**DESCRIPTION**

The BUH313 is manufactured using Multiepitaxial Mesa technology for cost-effective high performance and uses a Hollow Emitter structure to enhance switching speeds.

The BUH series is designed for use in horizontal deflection circuits in televisions and monitors.

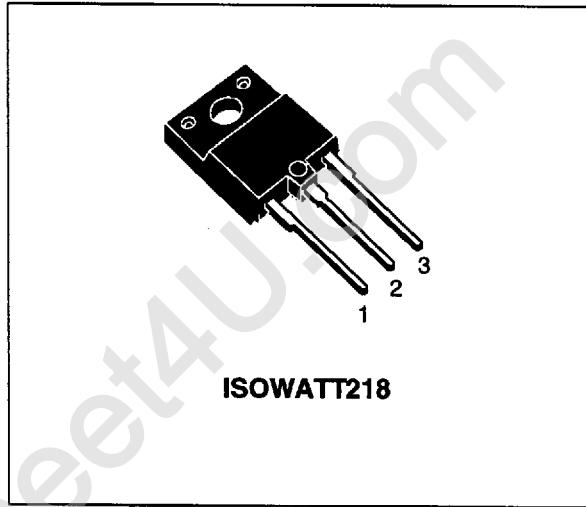
**INTERNAL SCHEMATIC DIAGRAM**


SCD696D

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage ( $I_E = 0$ )	1300	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	600	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	10	V
$I_C$	Collector Current	5	A
$I_{CM}$	Collector Peak Current ( $t_p < 5 \text{ ms}$ )	8	A
$I_B$	Base Current	3	A
$I_{BM}$	Base Peak Current ( $t_p < 5 \text{ ms}$ )	5	A
$P_{tot}$	Total Dissipation at $T_c = 25^\circ\text{C}$	44	W
$T_{stg}$	Storage Temperature	-65 to 150	$^\circ\text{C}$
$T_j$	Max. Operating Junction Temperature	150	$^\circ\text{C}$

## THERMAL DATA


R <sub>thj-case</sub>	Thermal Resistance Junction-case	Max	2.8	°C/W
-----------------------	----------------------------------	-----	-----	------

ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^\circ\text{C}$  unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I <sub>CES</sub>	Collector Cut-off Current ( $V_{BE} = 0$ )	$V_{CE} = 1300 \text{ V}$ $V_{CE} = 1300 \text{ V} \quad T_j = 125^\circ\text{C}$			1 2	mA mA
I <sub>EBO</sub>	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 5 \text{ V}$			100	μA
V <sub>CEO(sus)</sub>	Collector-Emitter Sustaining Voltage	$I_C = 100 \text{ mA}$	600			V
V <sub>EBO</sub>	Emitter-Base Voltage ( $I_C = 0$ )	$I_E = 10 \text{ mA}$	10			V
V <sub>CE(sat)*</sub>	Collector-Emitter Saturation Voltage	$I_C = 3 \text{ A} \quad I_B = 0.75 \text{ A}$			1.5	V
V <sub>BE(sat)*</sub>	Base-Emitter Saturation Voltage	$I_C = 3 \text{ A} \quad I_B = 0.75 \text{ A}$			1.3	V
$h_{FE}^*$	DC Current Gain	$I_C = 3 \text{ A} \quad V_{CE} = 5 \text{ V}$ $I_C = 3 \text{ A} \quad V_{CE} = 5 \text{ V} \quad T_j = 100^\circ\text{C}$	5.5 3.5			
t <sub>s</sub> t <sub>f</sub>	RESISTIVE LOAD Storage Time Fall Time	$V_{CC} = 400 \text{ V} \quad I_C = 3 \text{ A}$ $I_{B1} = 0.75 \text{ A} \quad I_{B2} = 1.5 \text{ A}$		1.6 110	2.4 200	μs ns
t <sub>s</sub> t <sub>f</sub>	INDUCTIVE LOAD Storage Time Fall Time	$I_C = 3 \text{ A} \quad f = 15625 \text{ Hz}$ $I_{B1} = 0.75 \text{ A} \quad I_{B2} = -1.5 \text{ A}$ $V_{cefflyback} = 1050 \sin\left(\frac{\pi}{5} \cdot 10^6\right) t \text{ V}$		3.5 340		μs ns
t <sub>s</sub> t <sub>f</sub>	INDUCTIVE LOAD Storage Time Fall Time	$I_C = 3 \text{ A} \quad f = 31250 \text{ Hz}$ $I_{B1} = 0.75 \text{ A} \quad I_{B2} = -1.5 \text{ A}$ $V_{cefflyback} = 1200 \sin\left(\frac{\pi}{5} \cdot 10^6\right) t \text{ V}$		3.5 270		μs ns

\* Pulsed: Pulse duration = 300 μs, duty cycle 1.5 %


## Safe Operating Area

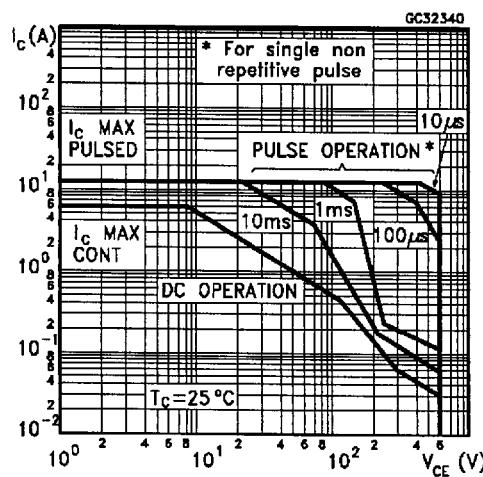


## Thermal Impedance

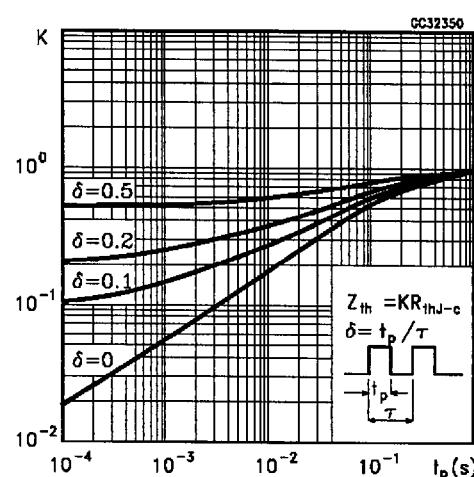


Derating Curve

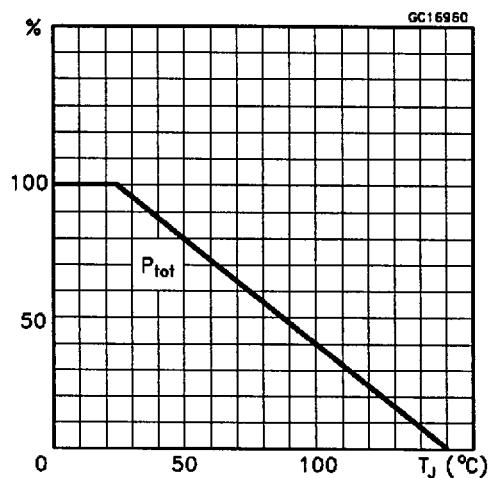


DC Current Gain

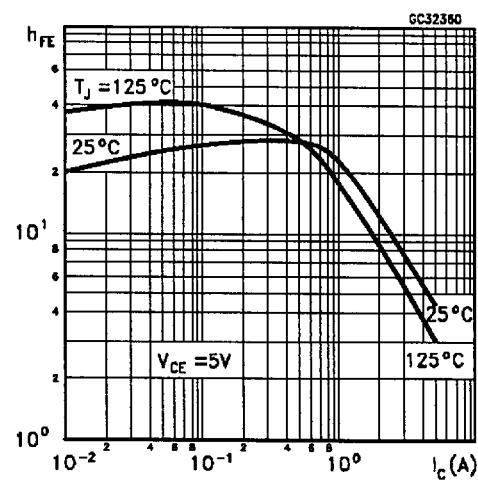



Collector Emitter Saturation Voltage

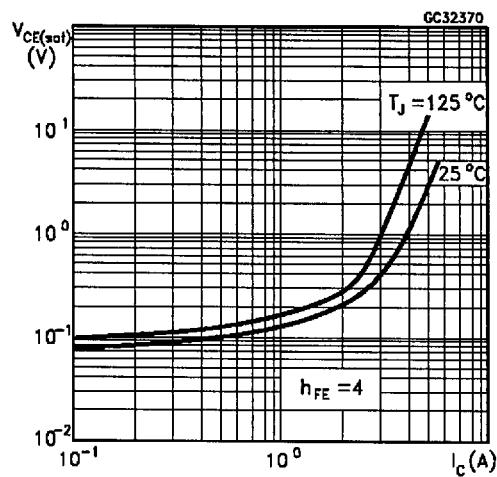


Base Emitter Saturation Voltage

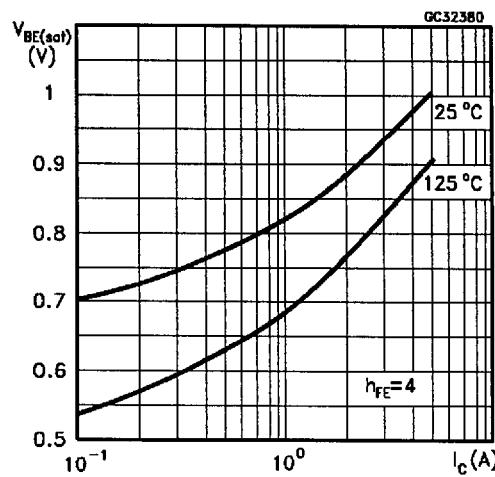


Power Losses at 16 KHz

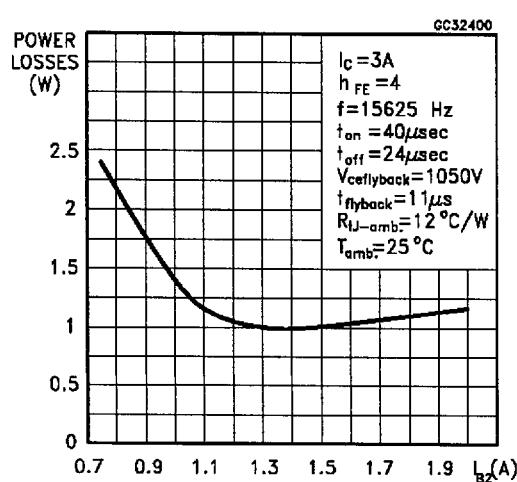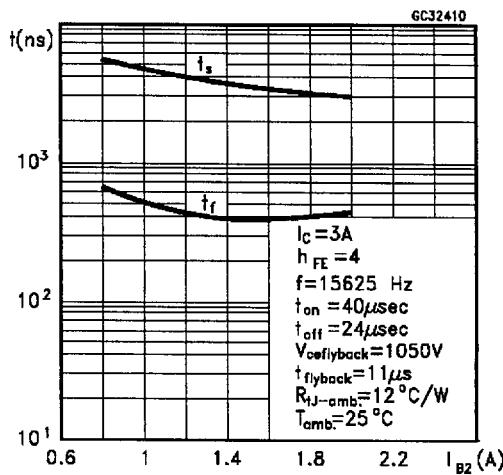Switching Time Inductive Load at 16KHz  
(see figure 2)


## Power Losses at 32 KHz

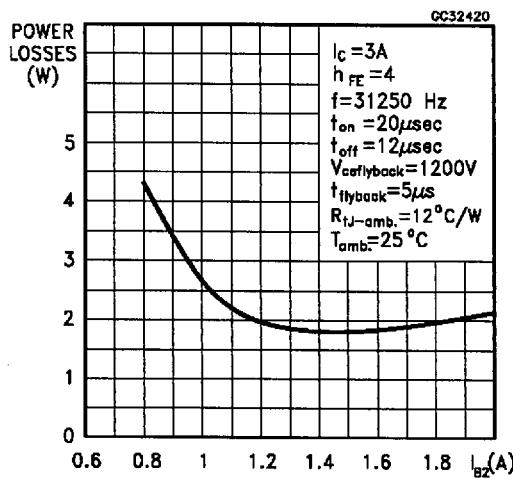

## Switching Time Inductive Load at 32 KHz (see figure 2)

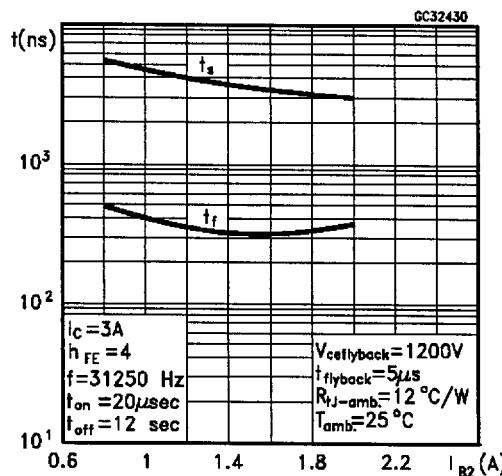

## Reverse Biased SOA

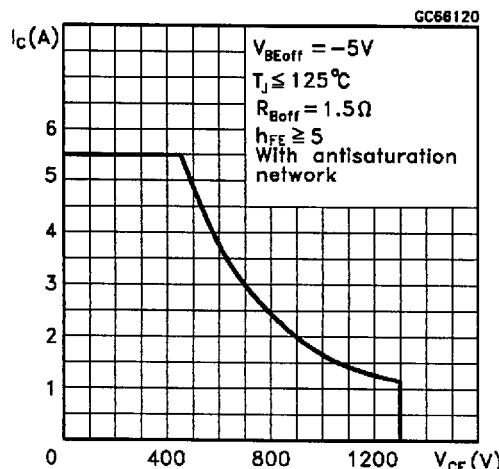

## BASE DRIVE INFORMATION

In order to saturate the power switch and reduce conduction losses, adequate direct base current I<sub>B1</sub> has to be provided for the lowest gain h<sub>FE</sub> at 100 °C (line scan phase). On the other hand, negative base current I<sub>B2</sub> must be provided to turn off the power transistor (retrace phase).

Most of the dissipation, in the deflection application, occurs at switch-off. Therefore it is essential to determine the value of I<sub>B2</sub> which minimizes power losses, fall time t<sub>f</sub> and, consequently, T<sub>j</sub>. A new set of curves have been defined to give total power losses, t<sub>s</sub> and t<sub>f</sub> as a function of I<sub>B2</sub> at both 16 KHz, 32 KHz and 64KHz scanning frequencies for choosing the optimum negative drive. The test circuit is



illustrated in figure 1.

Inductance L<sub>1</sub> serves to control the slope of the negative base current I<sub>B2</sub> to recombine the excess carrier in the collector when base current is still present, this would avoid any tailing phenomenon in the collector current.

The values of L and C are calculated from the following equations:



$$\frac{1}{2} L (I_C)^2 = \frac{1}{2} C (V_{CEfly})^2 \quad \omega = 2 \pi f = \frac{1}{\sqrt{LC}}$$

Where I<sub>C</sub>= operating collector current, V<sub>CEfly</sub>= flyback voltage, f= frequency of oscillation during retrace.

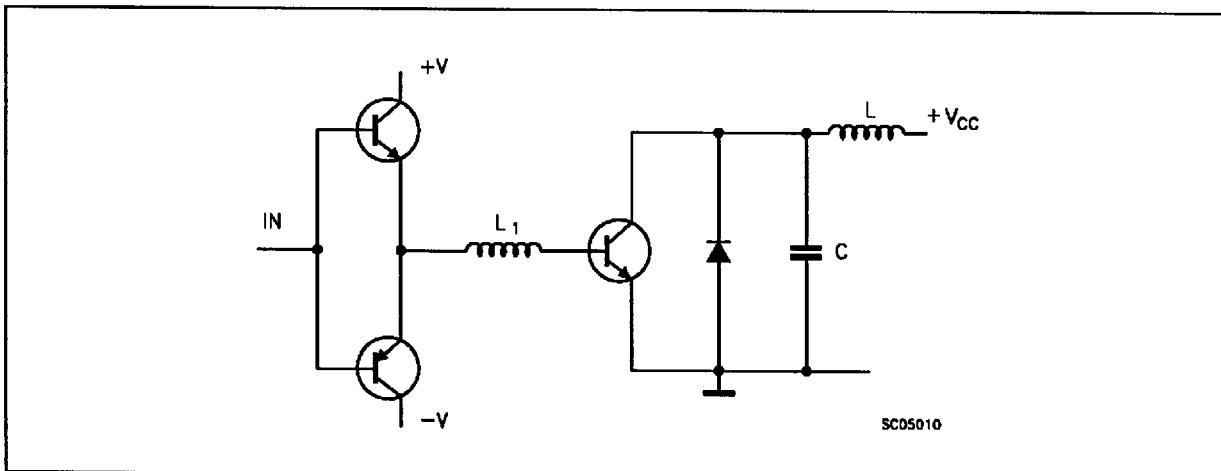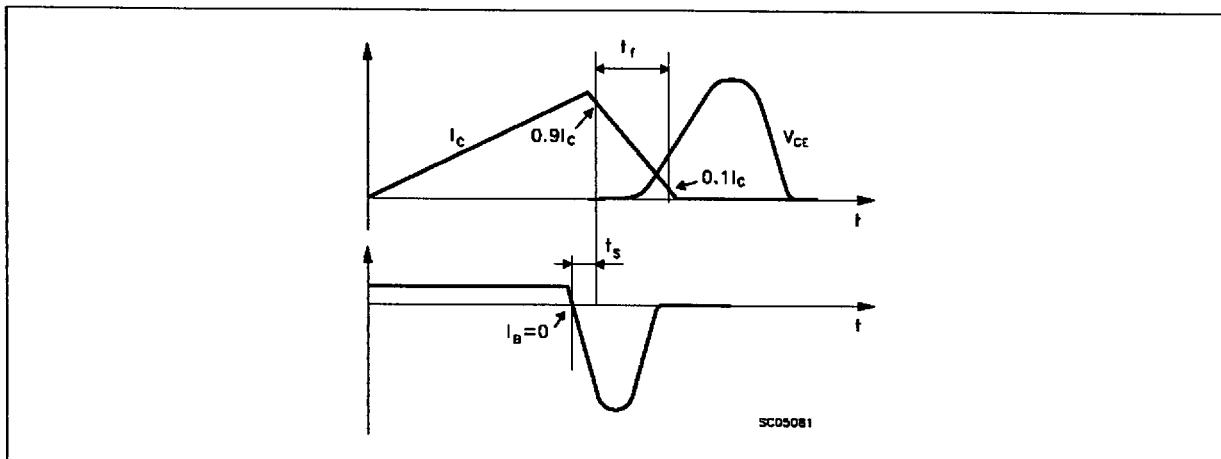**Figure 1:** Inductive Load Switching Test Circuits.**Figure 2:** Switching Waveforms in a Deflection Circuit

## ISOWATT218 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	5.35		5.65	0.210		0.222
C	3.3		3.8	0.130		0.149
D	2.9		3.1	0.114		0.122
D1	1.88		2.08	0.074		0.081
E	0.45		1	0.017		0.039
F	1.05		1.25	0.041		0.049
G	10.8		11.2	0.425		0.441
H	15.8		16.2	0.622		0.637
L1	20.8		21.2	0.818		0.834
L2	19.1		19.9	0.752		0.783
L3	22.8		23.6	0.897		0.929
L4	40.5		42.5	1.594		1.673
L5	4.85		5.25	0.190		0.206
L6	20.25		20.75	0.797		0.817
M	3.5		3.7	0.137		0.145
N	2.1		2.3	0.082		0.090
U		4.6			0.181	

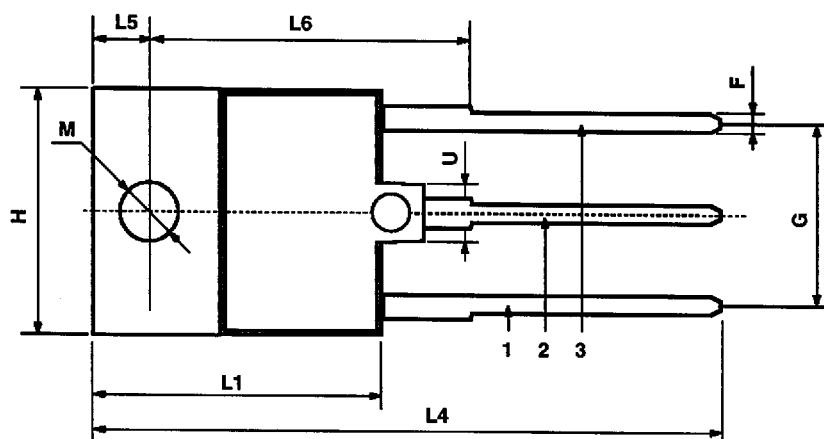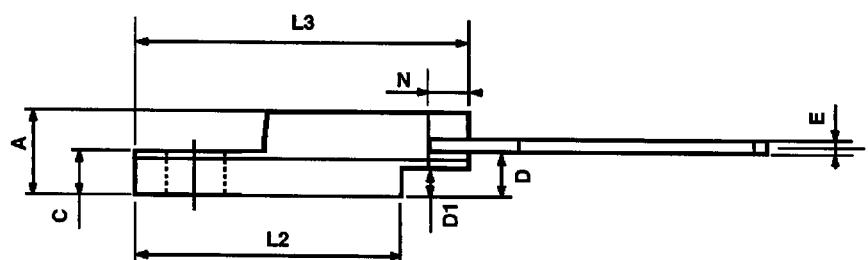

P025C