

FEATURES

- Solid State Relay and Optocoupler in One Package
- Package—Single 8 Pin DIP
- I/O Isolation, 3750 V_{RMS}
- Surface Mount Option
- Optocoupler
 - Bidirectional Current Detection
- Solid-state Relay
 - Typical R_{ON} 20 Ω
 - Load Voltage 350 V
 - Load Current 120 mA
 - Current Limit Protection
 - High Surge Capability
 - Linear, AC/DC Operation
 - Clean Bounce Free Switching
 - Low Power Consumption
 - High Reliability Monolithic Receptor

APPLICATIONS

- General Telecom Switching
 - On/off Hook Control
 - Dial Pulse
 - Ring Current Detection
 - Loop Current Sensing


Description

The LH1529 Telecom switch consists of an optically coupled solid state relay (SSR) and a bidirectional input optocoupler. The SSR is ideal for performing switchhook and dial-pulse switching while the optocoupler performs ring detection and loop current sensing functions. Both the SSR and opto coupler provide 3750 V_{RMS} of input to output isolation.

The SSR is integrated on a monolithic receptor die using high voltage BCDMOS technology. The SSR features low ON-resistance, high breakdown voltage and current-limit circuitry that protects the relay from telephone line induced lightning surges.

The optocoupler provides bidirectional current sensing via two antiparallel GaAs infrared emitting diodes. The opto channel provides a minimum CTR of 33% at 6 mA.

The LH1529 comes in a 8 pin, plastic DIP. To order packages with "S" bend leads, specify LH1529X00S.

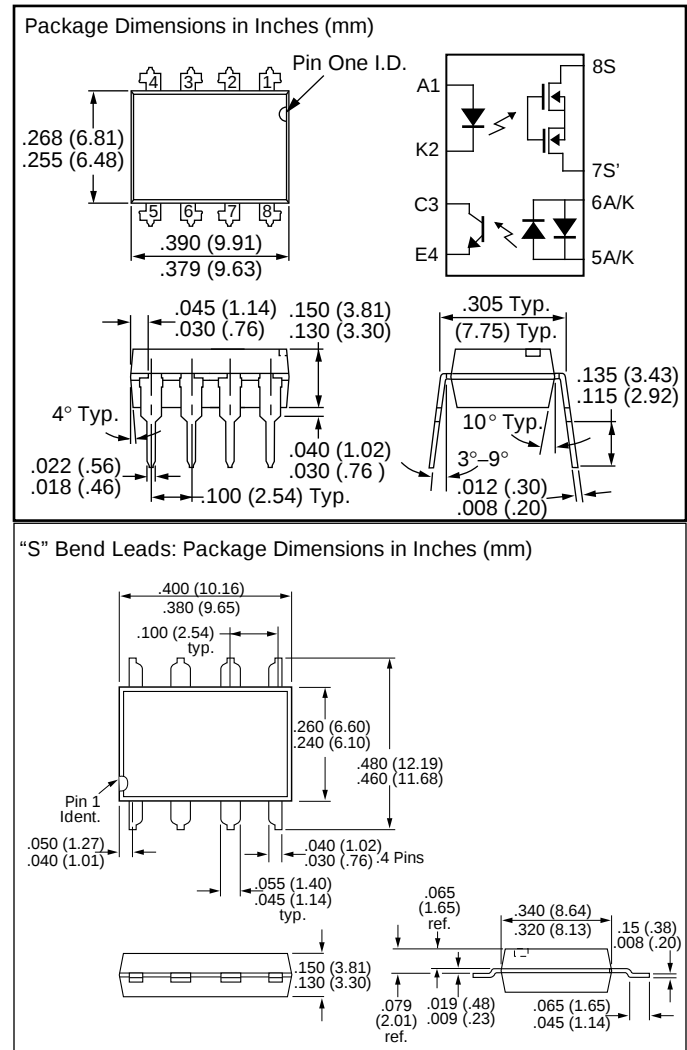

Absolute Maximum Ratings

Package

Ambient Temperature Range.....	-40 to +85°C
Storage Temperature Range	-40 to +150°C
Soldering Temperature (t=10 sec. max.).....	260°C
Isolation Test Voltage	3750 V _{RMS}
Isolation Resistance	
V _{IO} =500 V, T _A =25°C	≥10 ¹² Ω
V _{IO} =500 V, T _A =100°C	≥10 ¹¹ Ω
Total Power Dissipation	600 mW

SSR

LED Continuous Forward Current.....	50 mA
LED Reverse Voltage (I _R ≤10 μA).....	8 V
DC or Peak AC Load Voltage (I _L ≤50 μA).....	350 V
Continuous DC Load Current	120 mA

Optocoupler

LED Continuous Forward Current.....	50 mA
LED Reverse Voltage (I _R ≤10 μA).....	3 V
Collector to Emitter Breakdown Voltage	30 V
Phototransistor Power Dissipation	150 mW

Electrical Characteristics (T_A=25°)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
SSR						
LED Forward Current for Switch Turn-on	I _{Fon}		0.7	2.0	mA	I _L =100 mA, t=10 ms
LED Forward Current for Switch Turn-off	I _{Foff}	0.2	0.6		mA	V _L =±300 V
LED Forward Voltage	V _F	1.15	1.26	1.45	V	I _F =10 mA
ON-Resistance	R _{ON}	12	20	25	W	I _F =5 mA, I _L =±50 mA
OFF-Resistance	R _{OFF}		5000		GΩ	I _F =0 mA, V _L =±100 V
Current Limit	I _{limit}	170	210	250	mA	I _F =5 mA, t=5 ms
Output Off-state Leakage Current			0.02	200 1.0	nA μA	I _F =0 mA, V _L =±100 V I _F =0 mA, V _L =±350 V
Output Capacitance Pins 7 to 8			55 10		pF pF	I _F =0 mA, V _L =1 V I _F =0 mA, V _L =50 V
Turn-on Time	T _{on}		1.3	2.5	ms	I _F =5 mA, I _L =50 mA
Turn-off Time	T _{off}		0.6	2.5	ms	I _F =5 mA, I _L =50 V
Optocoupler						
LED Forward Voltage	V _F	0.9	1.2	1.5	V	I _F =10 mA
DC Current Transfer Ratio	CTR	33	165		%	I _F =6.0 mA, V _{CE} =0.5 V
Saturation Voltage	V _{CEsat}		.07	0.5	V	I _F =16.0 mA, I _C =2 mA
Dark Current Leakage	I _{CEO}			500	nA	I _F =0 mA, V _{CE} =5 V
Trickle Current Leakage	I _{CEO}			1	μA	I _F =5 μA, V _{CE} =5 V

Figure 1. Recommended operating conditions

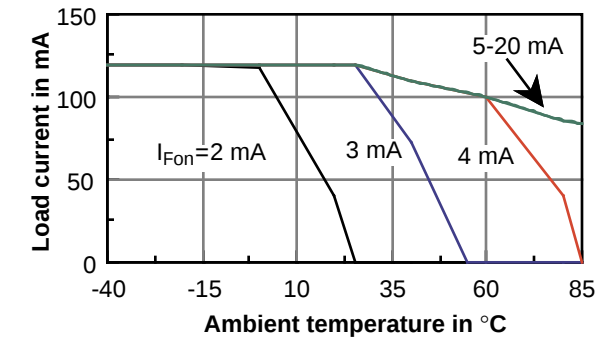


Figure 3. Typical SSR current vs. voltage

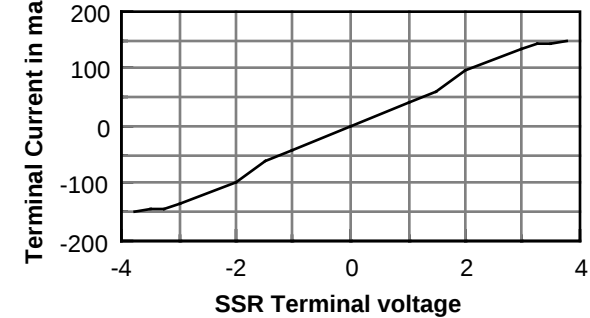


Figure 2. LED forward current vs. forward voltage

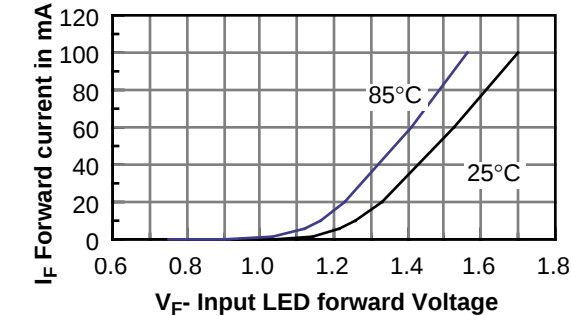


Figure 4. Change in ON-resistance vs. LED current

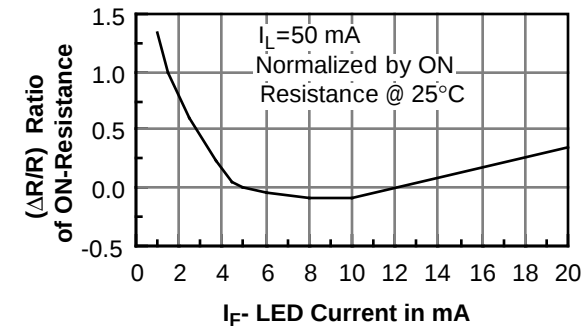


Figure 5. Change in ON-resistance vs. temp.

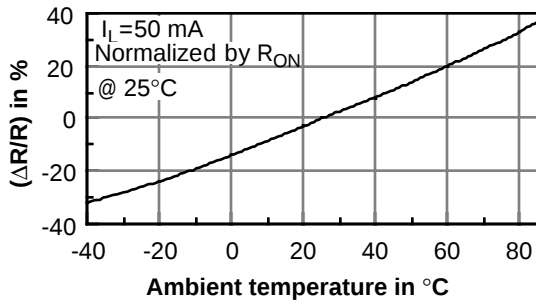


Figure 6. Turn-on current vs. temperature

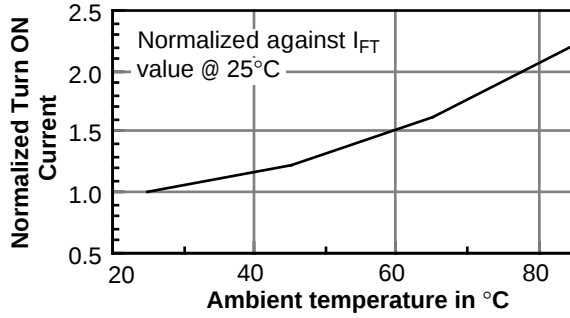


Figure 7. Current limit vs. temperature

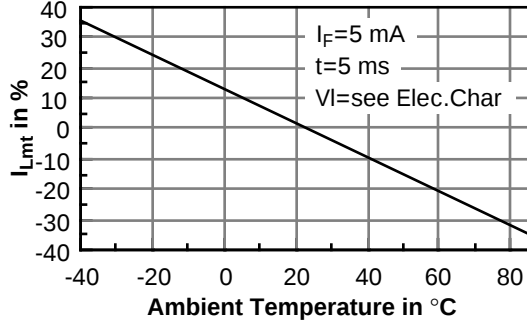


Figure 8. SSR turn-on time vs. resistive load

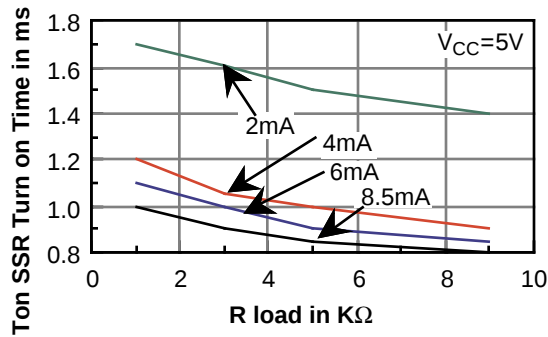


Figure 13. Switching test circuit for SSR channel

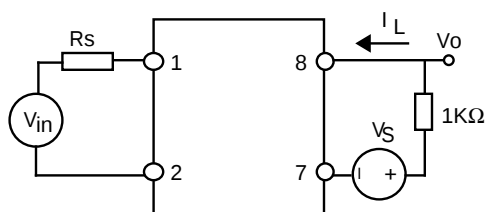


Figure 9. Collector current vs. collector voltage

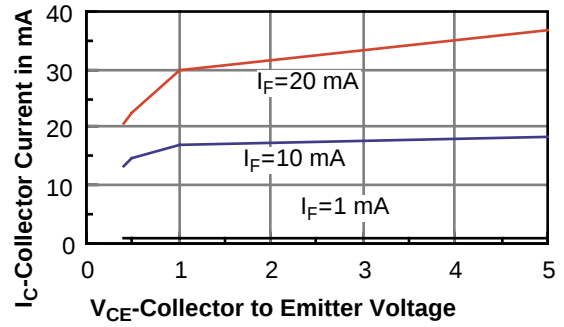


Figure 10. Collector current vs. collector voltage

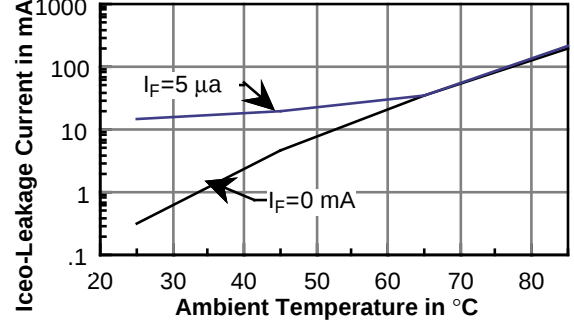


Figure 11. I_{CEO} leakage current vs. temperature

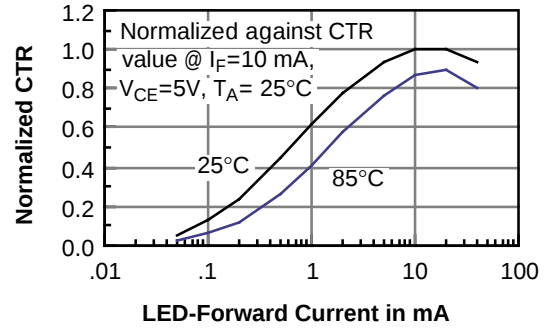


Figure 12. Non-saturated current transfer ratio

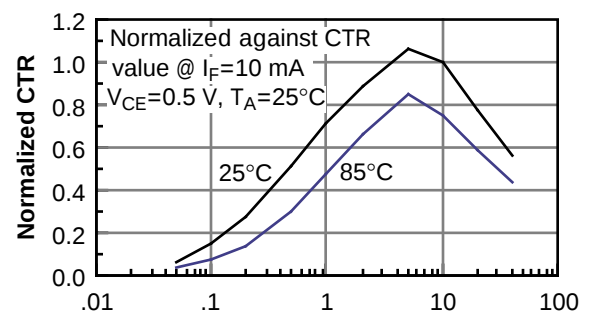


Figure 14. Switching waveform

