


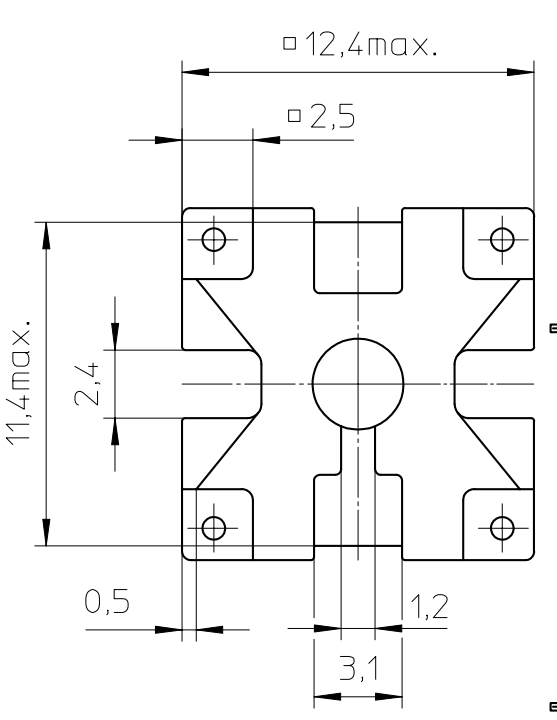


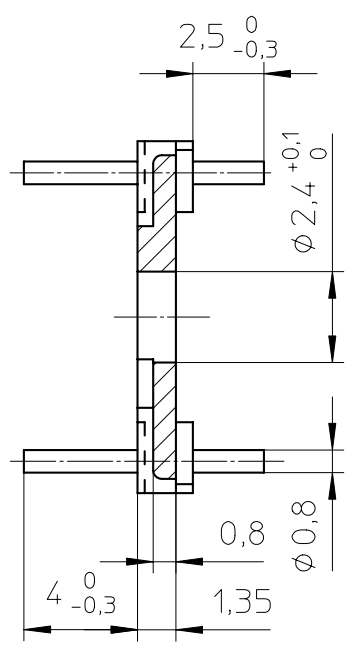

1 2 3 4

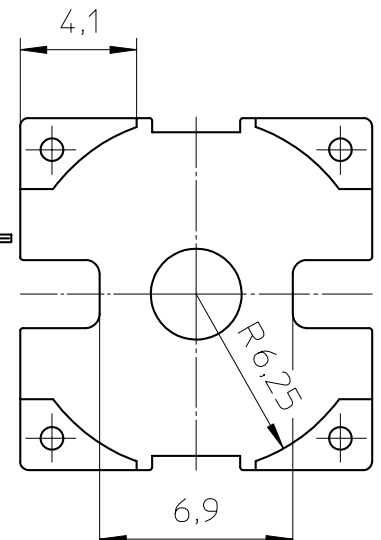

HOLE PATTERN:

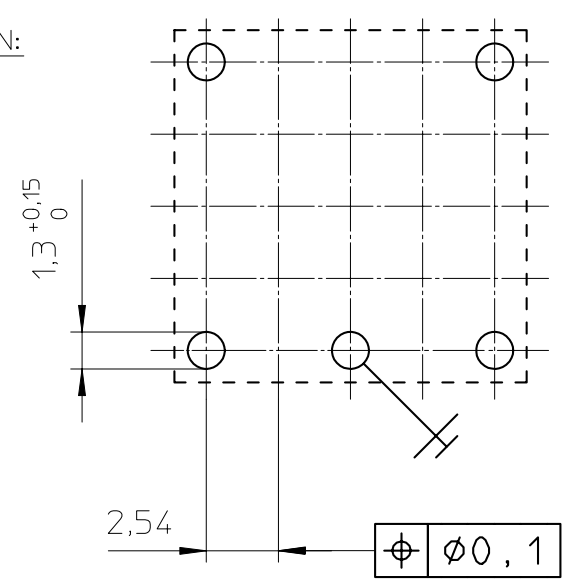

Tag plate material: Sumikon PM9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: copperclad steel, Sn plated.
 Max. operating temp.: 180°C.
 Resistance to soldering heat acc. to IEC 60068-2-20 Part2,
 test Tb, method 1, 235°C-3.5 sec.
 Solderability: IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C-2s

CLASS.NO.			2002-07-09
			2002-10-04
			2006-02-23
2002-10-04	TGP-P11/7-C	4322 021 04251	
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1 SH BL. BL. 112 - 001 010
MPA	CHECK CONTR.	DAT.	02-07-09
		Property of Eigendom van	© FERROXCUBE 2000
			A4

