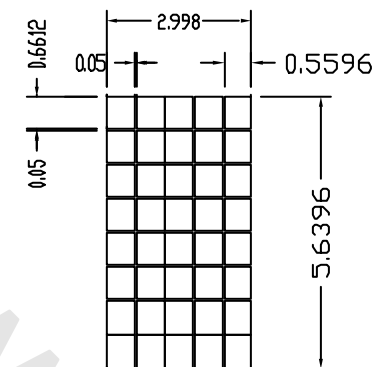




DETAIL: A



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Vss,K	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A

- NOTES:
- 1: DISPLAY TYPE: STN/YELLOW-GREEN MODE
  - 2: VIEWING DIRECTION: 6: 00
  - 3: POLARIZER MODE: TRANSFLECTIVE/POSITIVE
  - 4: DRIVE METHOD: 1/16 DUTY 1/5 BIAS
  - 5: LCD OPERATING VOLTAGE: 4.3V
  - 6: OPERATING TEMP.: 0° - +50°C
  - 7: STORAGE TEMP.: -20° - +60°C
  - 8: BACKLIGHT: LED
  - 9: CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
  - 10: ALL UNMARKED TOLERANCES: ±0.2mm
  - 11: BEZEL IS TO BE PAINTED BLACK

 <b>TIAN-MA MICROELECTRONICS CO.</b> 6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China		
DRAWN BY:		SCALE:
CHECKED BY:		UNIT: mm
APPROVED BY:	DWG NO: G-1	SHEET NO: 0F
CONFIRMED BY:	DWG NAME: TM162A7BC6G-1	