

# MN4516B / MN4516BS

## 4-Bit Binary Up/Down Counters

### ■ Description

The MN4516B/S are 4-bit synchronous up/down counters. An appropriate value of the counter is presettable by setting data inputs ( $P_0 \sim P_3$ ) while the reset input is Low and the load input High.



The counter advances on the positive going edge of the clock input when the load and the counter inputs are low.

A High on the reset input resets all the outputs ( $O_0 \sim O_3$ ) Low.

The  $UP/\overline{DN}$  input determines whether the counter functions up or down ( $H = UP, L = DOWN$ ).

The MN4516B/S are equivalent to MOTOROLA MC14516B and RCA CD4516B.

### ■ Truth Table

MR	PL	UP/DN	$\overline{CE}$	CP	Mode
L	H	×	×	×	parallel load
L	L	×	H	×	no change
L	L	L	L		count down
L	L	H	L		count up
H	×	×	×	×	liset

### Pin Explanation

CP : Clock input

UP/ $\overline{DN}$ : Up, Down designate input

PL : Counter load input

$\overline{CE}$  : Counter enable input


MR : Reset input

$P_0 \sim P_3$  : Data input

$O_0 \sim O_3$  : Counter output

$\overline{TC}$  : Carry output

P- 3




16-Pin • Plastic DIL Package

P- 4



16-Pin • Panafiat Package (SO-16D)

### Pin Configuration



### ■ Maximum Ratings (Ta=25°C)

Item		Symbol	Ratings	Unit
Supply Voltage		V <sub>DD</sub>	-0.5~+18	V
Input Voltage		V <sub>I</sub>	-0.5~V <sub>DD</sub> +0.5*	V
Output Voltage		V <sub>O</sub>	-0.5~V <sub>DD</sub> +0.5*	V
Peak Input · Output Current		±I <sub>I</sub>	max. 10	mA
Power Dissipation (per package)	Ta=-40~+60°C	P <sub>D</sub>	max. 400	mW
	Ta=+60~+85°C		Decrease up to 200mW rating at 8mW/°C	
Power Dissipation (per output terminal)		P <sub>D</sub>	max. 100	mW
Operating Ambient Temperature		T <sub>opr</sub>	-40~+85	°C
Storage Temperature		T <sub>stg</sub>	-65~+150	°C

\* V<sub>DD</sub> + 0.5V should be under 18V

### ■ DC Characteristics (V<sub>SS</sub>=0V)

Item	V <sub>DD</sub> (V)	Sym- bol	Conditions	Ta=-40°C		Ta=25°C		Ta=85°C		Unit	
				min.	max.	min.	max.	min.	max.		
Quiescent Power Supply Current	5	I <sub>DD</sub>	V <sub>I</sub> =V <sub>SS</sub> or V <sub>DD</sub>	—	20	—	20	—	150	μA	
	10			—	40	—	40	—	300		
	15			—	80	—	80	—	600		
Output Voltage Low Level	5	V <sub>OL</sub>	V <sub>I</sub> =V <sub>SS</sub> or V <sub>DD</sub>  I <sub>O</sub>   < 1μA	—	0.05	—	0.05	—	0.05	V	
	10			—	0.05	—	0.05	—	0.05		
	15			—	0.05	—	0.05	—	0.05		
Output Voltage High Level	5	V <sub>OH</sub>	V <sub>I</sub> =V <sub>SS</sub> or V <sub>DD</sub>  I <sub>O</sub>   < 1μA	4.95	—	4.95	—	4.95	—	V	
	10			9.95	—	9.95	—	9.95	—		
	15			14.95	—	14.95	—	14.95	—		
Input Voltage Low Level	5	V <sub>IL</sub>	I <sub>O</sub>   < 1μA	V <sub>O</sub> =0.5V or 4.5V V <sub>O</sub> =1V or 9V V <sub>O</sub> =1.5V or 13.5V	—	1.5	—	1.5	—	1.5	V
	10				—	3	—	3	—	3	
	15				—	4	—	4	—	4	
Input Voltage High Level	5	V <sub>IH</sub>	I <sub>O</sub>   < 1μA	V <sub>O</sub> =0.5V or 4.5V V <sub>O</sub> =1V or 9V V <sub>O</sub> =1.5V or 13.5V	3.5	—	3.5	—	3.5	—	V
	10				7	—	7	—	7	—	
	15				11	—	11	—	11	—	
Output Current Low Level	5	I <sub>OL</sub>	V <sub>O</sub> =0.4V, V <sub>I</sub> =0 or 5V V <sub>O</sub> =0.5V, V <sub>I</sub> =0 or 10V V <sub>O</sub> =1.5V, V <sub>I</sub> =0 or 15V	0.52	—	0.44	—	0.36	—	mA	
	10			1.3	—	1.1	—	0.9	—		
	15			3.6	—	3	—	2.4	—		
Output Current High Level	5	-I <sub>OH</sub>	V <sub>O</sub> =4.6V, V <sub>I</sub> =0 or 5V V <sub>O</sub> =9.5V, V <sub>I</sub> =0 or 10V V <sub>O</sub> =13.5V, V <sub>I</sub> =0 or 15V	0.52	—	0.44	—	0.36	—	mA	
	10			1.3	—	1.1	—	0.9	—		
	15			3.6	—	3	—	2.4	—		
Output Current High Level	5	-I <sub>OH</sub>	V <sub>O</sub> =2.5V, V <sub>I</sub> =0 or 5V	1.7	—	1.4	—	1.1	—	mA	
Input Leakage Current	15	±I <sub>I</sub>	V <sub>I</sub> =0 or 15V	—	0.3	—	0.3	—	1	μA	

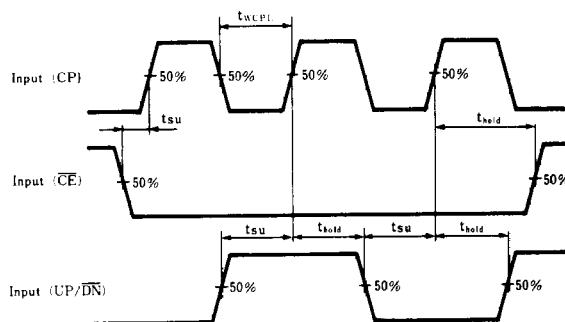
**Switching Characteristics** ( $T_a = 25^\circ\text{C}$ ,  $V_{SS} = 0\text{V}$ ,  $C_L = 50\text{pF}$ )

Item	$V_{DD}$ (V)	Symbol	min.	typ.	max.	Unit
Output Rise Time	5	$t_{TLH}$	—	60	180	ns
	10		—	30	90	
	15		—	20	60	
Output Fall Time	5	$t_{THL}$	—	60	180	ns
	10		—	30	90	
	15		—	20	60	
Propagation Delay Time CP→On (H→L)	5	$t_{PHL}$	—	145	435	ns
	10		—	60	180	
	15		—	45	135	
Propagation Delay Time CP→On (L→H)	5	$t_{PLH}$	—	155	465	ns
	10		—	65	195	
	15		—	45	135	
Propagation Delay Time CP→ $\overline{\text{TC}}$ (H→L)	5	$t_{PHL}$	—	260	780	ns
	10		—	105	315	
	15		—	75	225	
Propagation Delay Time CP→ $\overline{\text{TC}}$ (L→H)	5	$t_{PLH}$	—	180	540	ns
	10		—	75	225	
	15		—	55	165	
Propagation Delay Time PL→On (H→L)	5	$t_{PHL}$	—	125	375	ns
	10		—	55	165	
	15		—	40	120	
Propagation Delay Time PL→On (L→H)	5	$t_{PLH}$	—	170	510	ns
	10		—	70	210	
	15		—	50	150	
Propagation Delay Time PL→ $\overline{\text{TC}}$ (H→L)	5	$t_{PHL}$	—	250	750	ns
	10		—	110	330	
	15		—	80	240	
Propagation Delay Time PL→ $\overline{\text{TC}}$ (L→H)	5	$t_{PLH}$	—	250	750	ns
	10		—	110	330	
	15		—	80	240	
Propagation Delay Time $\overline{\text{CE}}$ → $\overline{\text{TC}}$ (H→L)	5	$t_{PHL}$	—	165	495	ns
	10		—	65	195	
	15		—	50	150	
Propagation Delay Time $\overline{\text{CE}}$ → $\overline{\text{TC}}$ (L→H)	5	$t_{PLH}$	—	145	435	ns
	10		—	60	180	
	15		—	45	135	
Propagation Delay Time MR→On, $\overline{\text{TC}}$ (H→L)	5	$t_{PHL}$	—	205	615	ns
	10		—	65	195	
	15		—	45	135	
Propagation Delay Time MR→ $\overline{\text{TC}}$ (L→H)	5	$t_{PLH}$	—	225	675	ns
	10		—	75	225	
	15		—	50	150	
Minimum Clock Pulse Width (Fig. 1)	5	$t_{WCPL}$	—	45	135	ns
	10		—	20	60	
	15		—	15	45	

**Switching Characteristics** ( $T_a = 25^\circ\text{C}$ ,  $V_{SS} = 0\text{V}$ ,  $C_L = 50\text{pF}$ ) (continued)

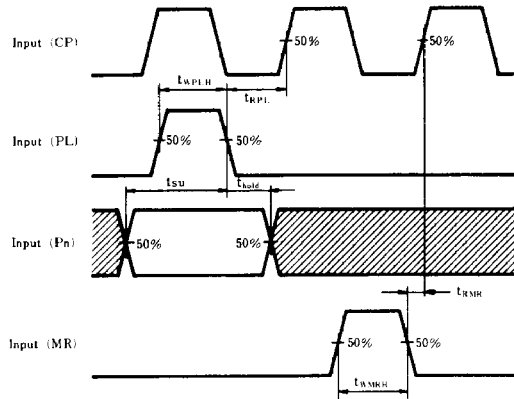
Item	$V_{DD}$ (V)	Symbol	min.	typ.	max.	Unit
Minimum PL Pulse Width (H) (Fig. 2)	5	$t_{WPLH}$	—	55	165	ns
	10		—	25	75	
	15		—	15	45	
Minimum Reset Pulse Width (H) (Fig. 2)	5	$t_{WMRH}$	—	60	180	ns
	10		—	25	75	
	15		—	20	60	
Reset Recovery Time (Fig. 2)	5	$t_{RMR}$	—	65	195	ns
	10		—	20	60	
	15		—	15	45	
PL Recovery Time (Fig. 2)	5	$t_{RPL}$	—	75	225	ns
	10		—	25	75	
	15		—	15	45	
Set-up Time (Fig. 2) $P_n \rightarrow \text{PL}$	5	$t_{su}$	—	50	150	ns
	10		—	25	75	
	15		—	20	60	
Set-up Time (Fig. 1) $\text{UP}/\overline{\text{DN}} \rightarrow \text{CP}$	5	$t_{su}$	—	125	375	ns
	10		—	50	150	
	15		—	35	105	
Set-up Time (Fig. 1) $\overline{\text{CE}} \rightarrow \text{CP}$	5	$t_{su}$	—	60	180	ns
	10		—	20	60	
	15		—	10	30	
Hold Time (Fig. 2) $P_n \rightarrow \text{PL}$	5	$t_{hold}$	—	-40	10	ns
	10		—	-20	5	
	15		—	-20	0	
Hold Time (Fig. 1) $\text{UP}/\overline{\text{DN}} \rightarrow \text{CP}$	5	$t_{hold}$	—	-90	35	ns
	10		—	-35	15	
	15		—	-25	15	
Hold Time (Fig. 1) $\overline{\text{CE}} \rightarrow \text{CP}$	5	$t_{hold}$	—	-40	20	ns
	10		—	-15	5	
	15		—	-10	5	
Maximum Clock Frequency	5	$f_{max}$	5	10	—	MHz
	10		12	24	—	
	15		17	34	—	
Input Capacitance		$C_i$	—	—	7.5	pF

**Dynamic Signal Waveforms**

 (Fig. 1)  $t_{WPLH}$ ,  $t_{su}(\text{UP}/\overline{\text{DN}} \rightarrow \text{CP} \cdot \overline{\text{CE}} \rightarrow \text{CP})$ ,  $t_{hold}(\text{UP}/\overline{\text{DN}} \rightarrow \text{CP} \cdot \overline{\text{CE}} \rightarrow \text{CP})$ 


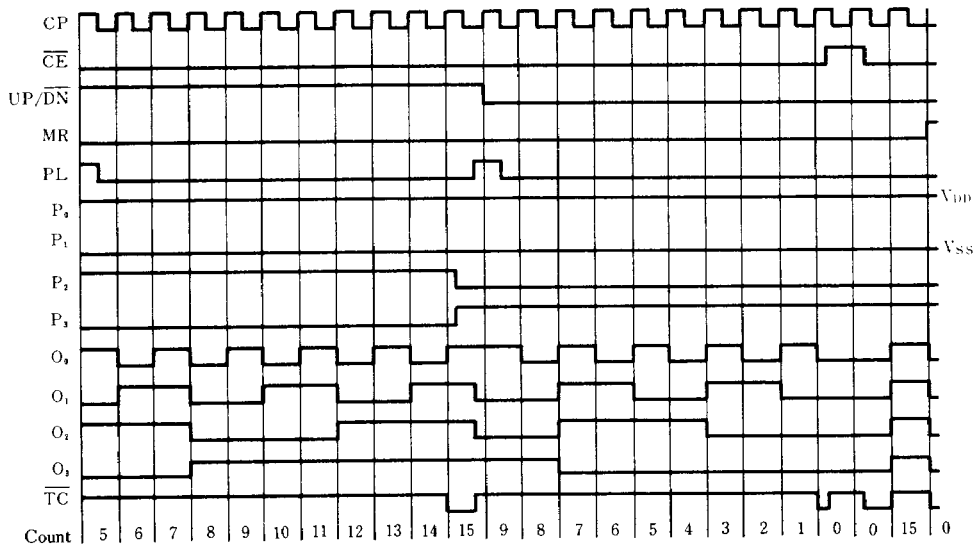
www.DataSheet4U.com

 Waveforms showing minimum pulse width for CP, set-up and hold times for  $\overline{\text{CE}} \rightarrow \text{CP}$  and  $\text{UP}/\overline{\text{DN}} \rightarrow \text{CP}$

(Fig. 2)  $t_{WPLH}$ ,  $t_{RPL}$ ,  $t_{RMR}$ ,  $t_{WMRH}$ ,  $t_{SU}(P_n \rightarrow PL)$ ,  $t_{hold}(P_n \rightarrow PL)$ 

Waveforms showing minimum pulse width for PL and MR, recovery time for PL and MR, and set-up and hold times for  $P_n$  to PL.

## ■ Timing Diagram



## Logic Diagram

