


SIP LOW/MEDIUM-FREQUENCY CRYSTAL OSCILLATOR

SG-10

Products number

Q3110000xxxxx00

- Low current consumption.
- Small suited to high-density mounting.
- Mountable on a standard printed circuit board.
- Cylindrical low/medium-frequency crystal unit builtin, thus assuring high reliability.

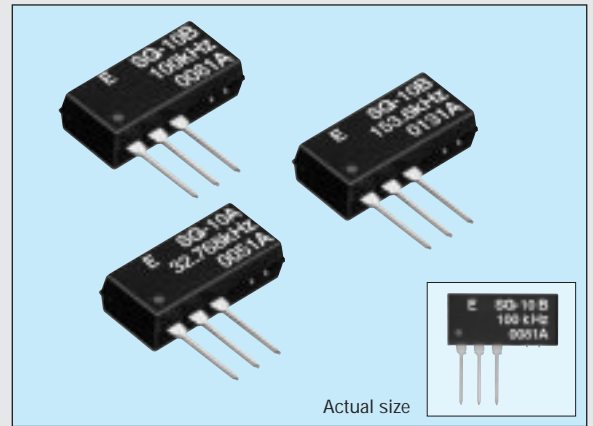


Specifications (characteristics)

Item	Symbol	Specifications	Remarks
Output frequency range	f_0	10.0000 Hz to 153.6000 kHz	For output frequency, see the table below
Power source voltage	Max. supply voltage	V_{DD-GND}	-0.3 V to +7.0 V
	Operating voltage	V_{DD}	4.5 V to 5.5 V
Temperature range	Storage temperature	T_{STG}	-55 °C to +125 °C
	Operating temperature	T_{OPR}	-10 °C to +70 °C
Frequency tolerance	$\Delta f/f_0$	A: $\pm 10 \times 10^{-6}$ B: $\pm 50 \times 10^{-6}$	$V_{DD}=5 V$ $T_a=+25 ^\circ C$
Frequency temperature characteristics		$+10 \times 10^{-6} / -120 \times 10^{-6}$	-10 °C to +70 °C, taking $T_a=+25 ^\circ C$ as the reference
Frequency voltage characteristics		$\pm 10 \times 10^{-6}$ Max.	
Current consumption	I_{OP}	0.5 mA Max..	No load condition
Duty	t_w/t_i	40 % to 60 % (except for cases of 1/3 and 1/5 divided frequency.)	$1/2 V_{DD}$ or 1.4 V level
Output voltage	V_{OH}	$V_{DD} - 1.0 V$ Min.	$I_{OH} = -40 \mu A$
	V_{OL}	0.4 V Max.	$I_{OL} = 1.6 mA$
Output load condition (fan out)	N/CL	1 TTL Max./15 pF Max.	TTL load/C-MOS load
Output rise time	t_{TLH}	60 ns Max.	
Output fall time	t_{THL}	50 ns Max.	
Oscillation start up time	t_{OSC}	1 s Max.	For more than 1 ms until $V_{DD}=0 V \rightarrow 4.5 V$. Time at 4.5 V to be 0 s
Aging	f_a	$\pm 5 \times 10^{-4}$ /year Max.	$T_a=+25 ^\circ C \pm 3 ^\circ C$, $V_{DD}=5 V$, first year
Shock resistance	S.R.	$\pm 5 \times 10^{-6}$ Max.	Three drops on a hard board from 750 mm or excitation test with $29400 m/s^2 \times 0.3 ms \times 1/2$ sine wave in 3 directions

Unless otherwise stated, characteristics (specifications) shown in the above table are based on the rated operating temperature and voltage condition.

External dimensions

(Unit: mm)

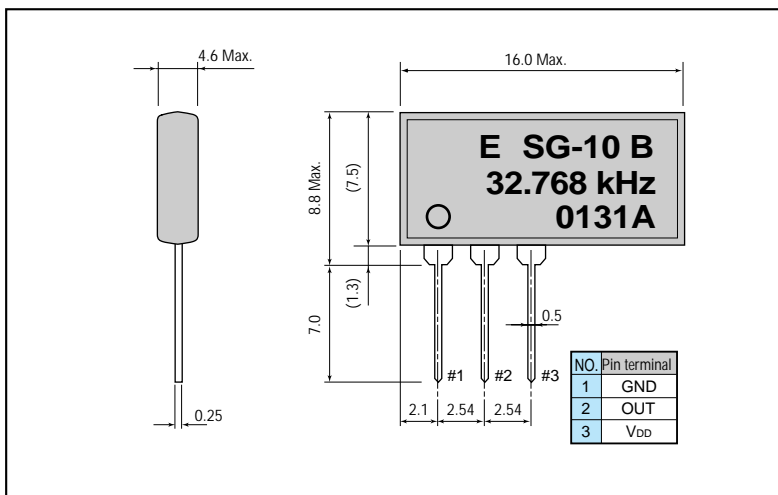

Output frequency table

Oscillation source	32.768 kHz, 60.000 kHz, 96.000 kHz, 100.000 kHz, 153.600 kHz
Divided frequency output (calculation method)	Oscillation source frequency x (any arbitrary one of 1/1, 1/2, 1/3, 1/4, 1/5, 1/6, 1/12) x (any arbitrary one of 1/1, 1/10, 1/100, 1/1000). Over 10.0 Hz range.

For frequencies other than the above, please consult us. (Min. order lot 10000 pcs.)

Output frequency example

Oscillation source	32.768 kHz, 60.000 kHz, 96.000 kHz, 100.000 kHz, 153.600 kHz
Divided frequency	10.000 Hz, 50.000 Hz, 100.000 Hz, 1.000 kHz, 4.800 kHz, 9.600 kHz, 19.200 kHz, 38.400 kHz, 50.000 kHz, 76.800 kHz