


## 3/8" Square (10 mm) Single-Turn Cermet Trimmer



### FEATURES







- Arrow and graduations for repeatable settings
- "O" ring seal for solvent and aqueous washing
- Rigid board mounting achieved with pins secured in housing
- Multi-finger wiper for better contact resistance
- Solid end stop
- Tests according to CECC 41000 or IEC 60393-1
- Compliant to RoHS Directive 2002/95/EC

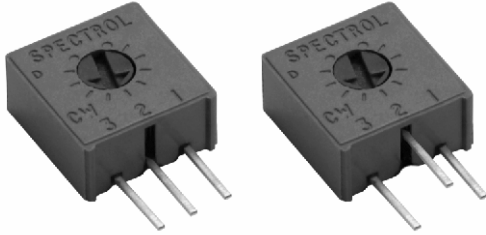


**RoHS**  
COMPLIANT

The Model 63 cermet trimmer is available in several pin configurations for top or side adjustment and with a choice of Knob styles for finger setting. Quick adjustment is achieved with multi-finger wiper and the standard resistance range is between 100  $\Omega$  and 2 M $\Omega$  with a tolerance of  $\pm 10\%$ .

### DIMENSIONS in inches (millimeters) $\pm 0.02$ mm (0.5)

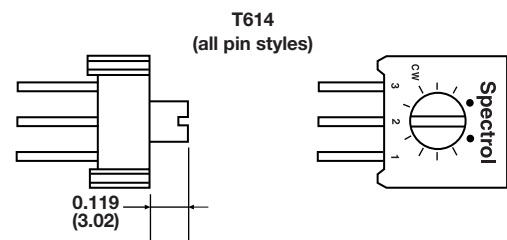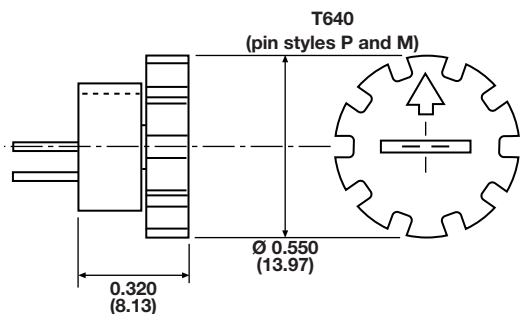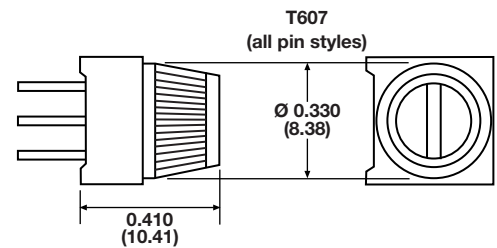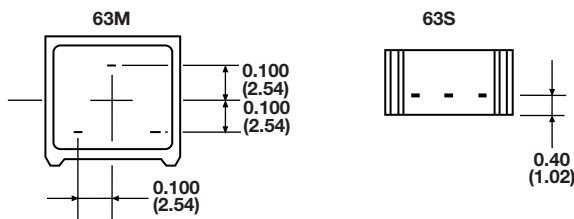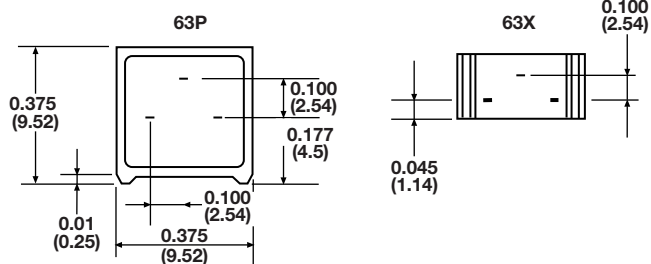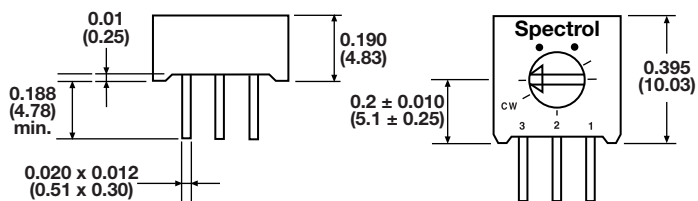

**ELECTRICAL SPECIFICATIONS**

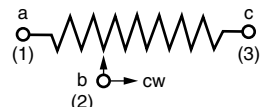Effective travel	270° nominal
Resistance range	100 $\Omega$ to 2 M $\Omega$
Resistance tolerance	$\pm 10\%$
End resistance	2 $\Omega$ or 1 % whichever is greater
Temperature coefficient of resistance (typical)	$\pm 100$ ppm/°C
Power rating	0.5 W at + 70 °C derated linearly to 0 W at 125 °C maximum voltage not to exceed 250 V
Circuit diagram	
Dielectric withstand voltage	1000 V <sub>AC</sub> at sea level; 250 V <sub>AC</sub> at 80 000 ft (24 000 m)
Insulation resistance (500 V <sub>DC</sub> )	1000 M $\Omega$ minimum
Contact resistance variation	1 % or 1 $\Omega$ , whichever is greater

**MECHANICAL SPECIFICATIONS**

Mechanical travel	300° $\pm 50$
Starting torque	35 mNm max.
Weight	0.03 oz. (0.85 g) max.
Resistance element	Cermet
2 terminal adjustability	$\pm 0.15\%$ of RT
3 terminal adjustability	$\pm 0.05\%$ of applied voltage
Terminals	Pure Sn (code e3)

**ENVIRONMENTAL SPECIFICATIONS**

Temperature range	- 55 °C to + 125 °C
Climatic category	55/125/21
Sealing	Fully sealed - IP67

**PERFORMANCES**

TESTS	CONDITIONS	MAX. (R)	CHANGE PER CECC		PER IEC	PER MIL
			V <sub>AB</sub> /V <sub>AC</sub>	41100		
Vibration	98 m/s <sup>2</sup> , 10 Hz to 500 Hz	1 %	2 %	(PARA 2.3.2)	Test FC (IEC 6-2-6)	Method 204
Electrical endurance	1000 h	3 %	-	(PARA 2.5.16)	-	No equiv.
Soldering	-	-	-	(PARA 2.3.7)	Test TB (IEC 68-2-20)	Method 208
Resistance to heat	-	1 %	-	(PARA 2.3.7)	Test B (IEC 68-2-20A)	Method 210
Damp heat steady state	21 days	3 %	-	(PARA 2.1)	Test C (IEC 68-2-3)	Method 103
Mechanical life	200 cycles	3 %	-	-	Method 2	-
Terminal strength	2.2 lbs. (1 kg)	min.	-	-	-	-

**MARKING**

- Vishay trademark
- Model
- Resistance value
- Tolerance
- Date code
- Terminal identification

**PACKAGING**

- In box of 200 pieces code B40 (BO200)
- On request :
  - In box of 100 pieces code B30 (BO100)
  - In tube of 50 pieces code T20 (TU50)

**ORDERING INFORMATION** (Part Number)

M	6	3	P	2	0	1	K	B	4	0	T	6	0	7		
Model			STYLE			OHMIC VALUE			TOLERANCE			PACKAGING CODE			SPECIAL NUMBER	
M63			P M X S			From 100 Ω to 2 MΩ 201 = 200 kΩ			K = 10 %			B40 = Box 200 pieces On request: B30 = Box 100 pieces T20 = Tube 50 pieces			(If applicable) Given by Vishay for custom design	

**DESCRIPTION** (for information only)

63	P	200U	10 %	T607	BO200	e3
MODEL	STYLE	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD FINISH



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.