



Outline Dimensions (mm)

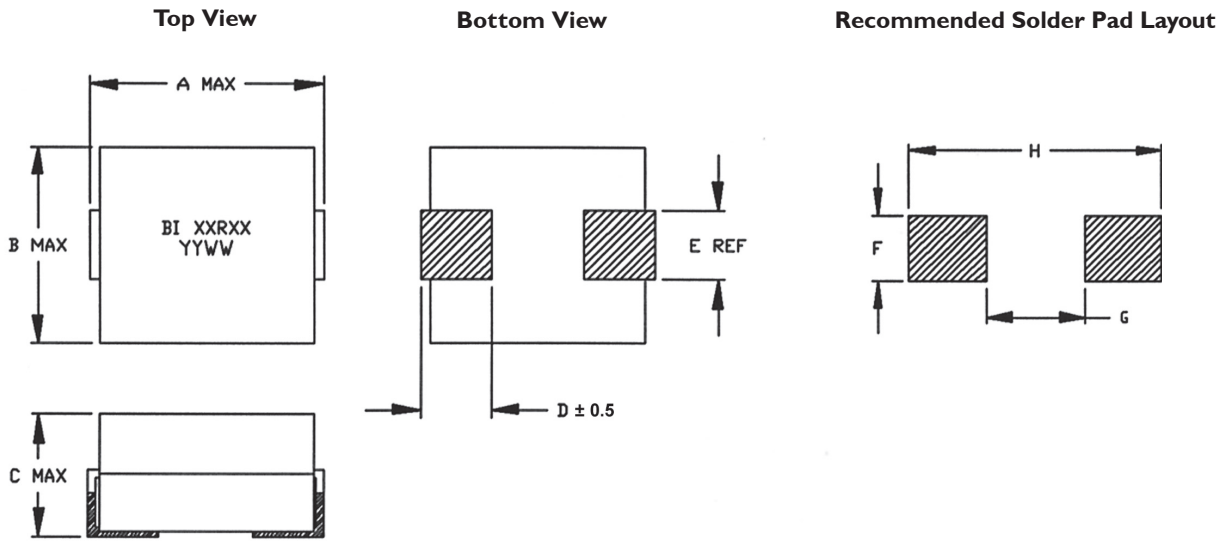

| Case size | A | B | C | D | E | F | G | H |
|-----------|------|------|------|------|------|------|------|------|
| 10 | 6.00 | 5.00 | 3.00 | 1.00 | 1.50 | 1.60 | 2.00 | 5.80 |
| 20 | 7.50 | 6.50 | 5.00 | 1.50 | 2.95 | 3.00 | 2.50 | 7.50 |
| 30 | 7.00 | 7.00 | 5.00 | 1.50 | 2.30 | 2.50 | 2.50 | 7.50 |
| 40 | 7.01 | 6.35 | 3.30 | 1.50 | 2.85 | 3.20 | 2.50 | 7.50 |
| 50 | 8.60 | 6.30 | 3.30 | 1.50 | 2.85 | 3.20 | 2.50 | 9.00 |
| 55 | 8.60 | 6.30 | 4.80 | 1.50 | 2.85 | 3.20 | 2.50 | 9.00 |
| 60 | 10.2 | 7.00 | 5.10 | 1.50 | 2.50 | 2.80 | 5.50 | 10.5 |
| 70 | 13.5 | 13.0 | 6.80 | 3.00 | 5.00 | 5.30 | 5.50 | 13.5 |
| 75 | 13.5 | 13.0 | 3.50 | 2.00 | 2.50 | 3.20 | 7.00 | 13.5 |
| 80 | 13.8 | 13.0 | 8.20 | 2.00 | 5.00 | 5.30 | 5.50 | 13.8 |

Electrical Characteristics @ 25 °C

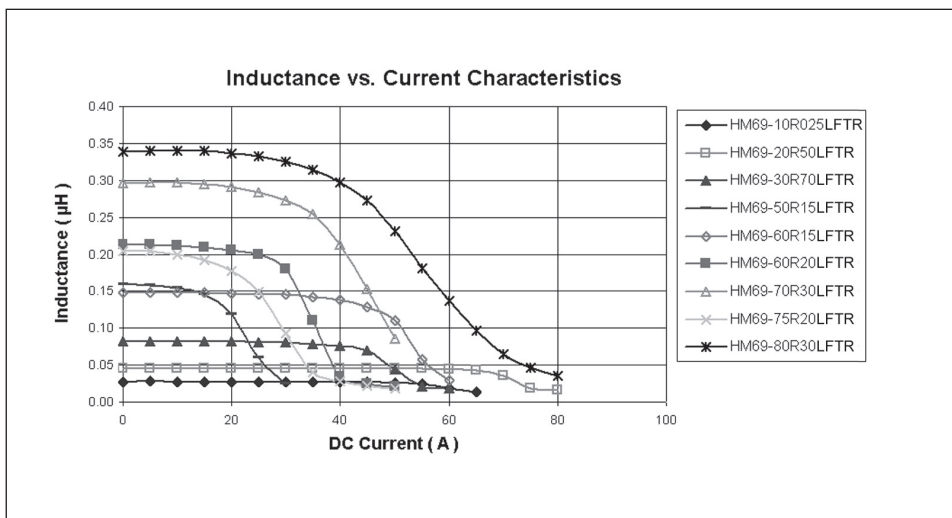

Electrical Characteristics @ 25 °C (Cont'd)

