


# ULTRA THIN D-SUB FEMALE R/A SMD TYPE

(FOOT PRINT 1.2mm)

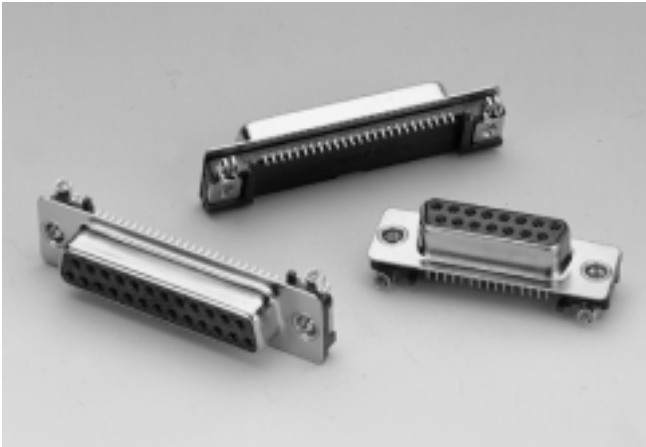


## 070433FB Series

Mates with SUYIN 070700M, 070900M, 070200M Series

### Specifications:

- 9, 15, 25 Circuits
- Insulator Material : High Temp. Plastic
- Operating Temp. Range : 230°C for 30 Seconds
- Terminal Material : Phosphor Bronze
- Plating : Selective Plated (Gold/Tin)  
: Metal shell-Nickel Plated  
: Soldering clip-Tin Plated
- Max. Current Rating : 2.5A
- Voltage Rating : 250V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

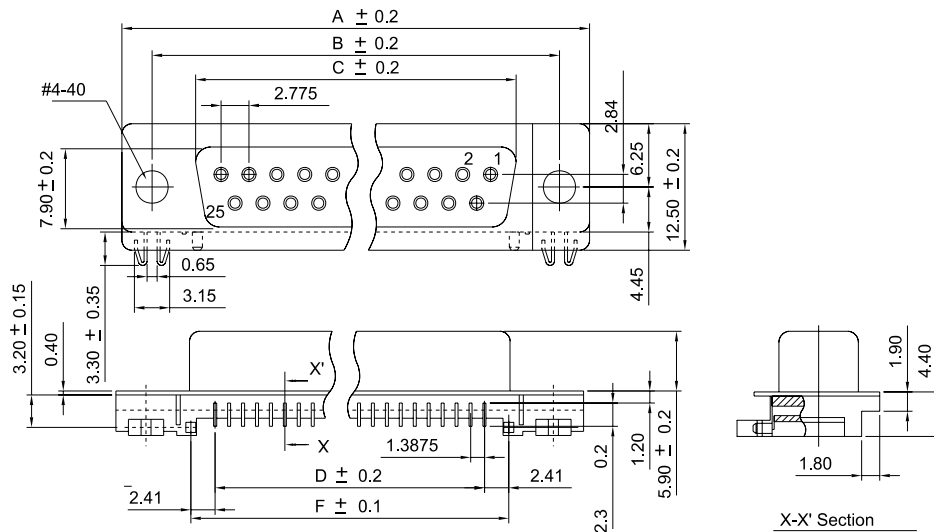

## Order Information


070433FB□□□□00ZU  
1 2 3 4 5

1. 'B' : Right Angle SMT Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package


'U' : Tube Package not Cap

Reference Page 11

## Recommended P.C.B Layout I

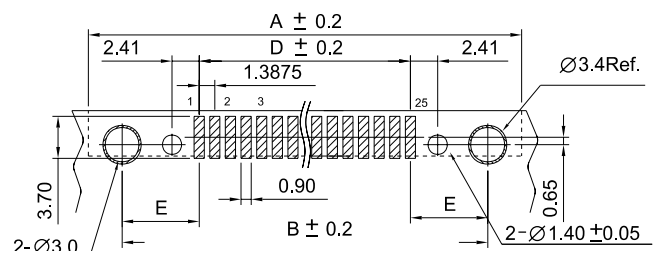

## Recommended P.C.B Layout II

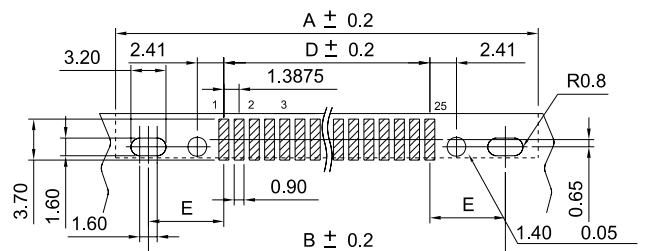

## Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
070433FB009□□□00ZU	30.81	24.99	16.33	11.10	6.945	15.92
070433FB015□□□00ZU	39.14	33.32	24.66	19.425	6.9475	24.425
070433FB025□□□00ZU	53.04	47.04	38.38	33.30	6.87	38.12

\* Available for PC 99 system