



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-220 Plastic-Encapsulate Voltage Regulator

CJ7810 Three-terminal positive voltage regulator


FEATURES

Maximum Output current I_{OM} : 1.5 A

Output voltage V_o : 10 V

Continuous total dissipation

P_D : 2 W ($T_J = 25^\circ C$)

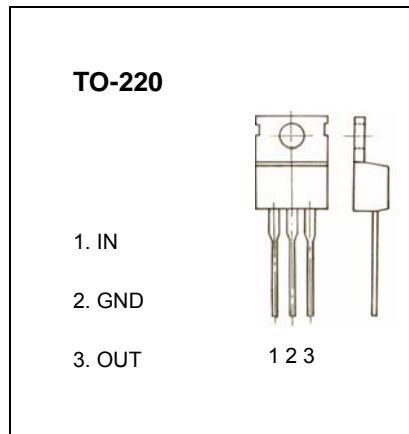

ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	°C/W
Thermal resistance junction-cases	$R_{\theta JC}$	5	°C/W
Operating Junction Temperature Range	T_{OPR}	0-150	°C
Storage Temperature Range	T_{STG}	-65-150	°C

ELECTRICAL CHARACTERISTICS($V_i=17V, I_o=500mA, 0^\circ C < T_J < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_J=25^\circ C$	9.6	10	10.4	V
		$12.5V \leq V_i \leq 25V, I_o=5mA-1A, P \leq 15W$	9.5	10	10.5	V
Load Regulation	ΔV_o	$T_J=25^\circ C, I_o=5mA-1.5A$		12	200	mV
		$T_J=25^\circ C, I_o=250mA-750mA$		4	100	mV
Line regulation	ΔV_o	$12.5V \leq V_i \leq 28V, T_J=25^\circ C$		7	200	mV
		$14V \leq V_i \leq 20V, T_J=25^\circ C$		2	100	mV
Quiescent Current	I_q	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	ΔI_q	$12.5V \leq V_i \leq 28V$			1	mA
	ΔI_q	$5mA \leq I_o \leq 1A$			0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$		-1		mV/°C
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		70		μV
Ripple Rejection	RR	$13V \leq V_i \leq 23V, f=120Hz, T_J=25^\circ C$	55	71		dB
Dropout Voltage	V_d	$T_J=25^\circ C, I_o=1A$		2		V
Output resistance	R_o	$f=1KHz$		18		mΩ
Short Circuit Current	I_{sc}	$T_J=25^\circ C$		400		mA
Peak Current	I_{pk}	$T_J=25^\circ C$		2.2		A

TYPICAL APPLICATION

