


# SHINDENGEN

## Darlington Transistor

**2SB1282**  
**(TP4J10)**

**± 4A PNP**

### OUTLINE DIMENSIONS

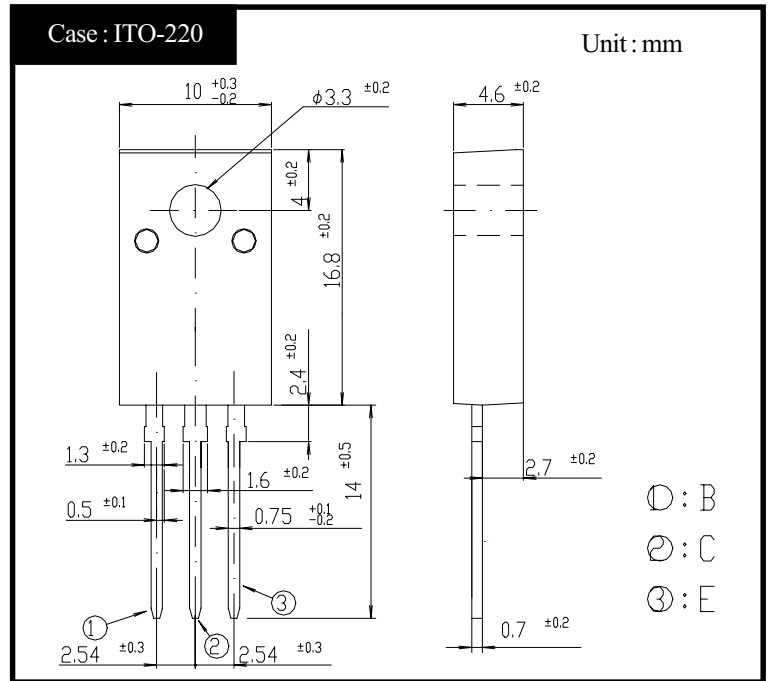

### RATINGS

#### ● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-55~+150	°C
Junction Temperature	T <sub>j</sub>		+150	°C
Collector to Base Voltage	V <sub>CB0</sub>		-100	V
Collector to Emitter Voltage	V <sub>CEO</sub>		-100	V
Emitter to Base Voltage	V <sub>EBO</sub>		-7	V
Collector Current DC	I <sub>C</sub>		-+4	A
Collector Current Peak	I <sub>CP</sub>		-+6	A
Base Current DC	I <sub>B</sub>		-0.3	A
Base Current Peak	I <sub>BP</sub>		-0.5	A
Total Transistor Dissipation	P <sub>T</sub>	T <sub>c</sub> = 25°C	25	W
Dielectric Strength	V <sub>dis</sub>	Terminals to case AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

#### ● Electrical Characteristics (T<sub>c</sub>=25°C)


Item	Symbol	Conditions	Ratings	Unit
Collector Cutoff Current	I <sub>CB0</sub>	V <sub>CB</sub> = -100V	Max -0.1	mA
	I <sub>CEO</sub>	V <sub>CE</sub> = -100V	Max -0.1	
Emitter Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> = -7V	Max -5	mA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = -3V, I <sub>C</sub> = -1A	Min 1,500	
			Max 15,000	
Collector to Emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -1A	Max -1.5	V
Base to Emitter Saturation Voltage	V <sub>BE(sat)</sub>	I <sub>B</sub> = -2mA	Max -2.0	V
Thermal Resistance	θ <sub>jc</sub>	Junction to case	Max 5.0	°C/W
Transition Frequency	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = -0.4A	TYP 20	MHz
Turn on Time	ton		Max 1	μs
Storage Time	ts	I <sub>C</sub> = -1A I <sub>B1</sub> = I <sub>B2</sub> = -2mA R <sub>L</sub> = 25 Ω	Max 4	
Fall Time	tf	V <sub>BB2</sub> = -4V	Max 2	

# 2SB1282

$h_{FE} - I_C$

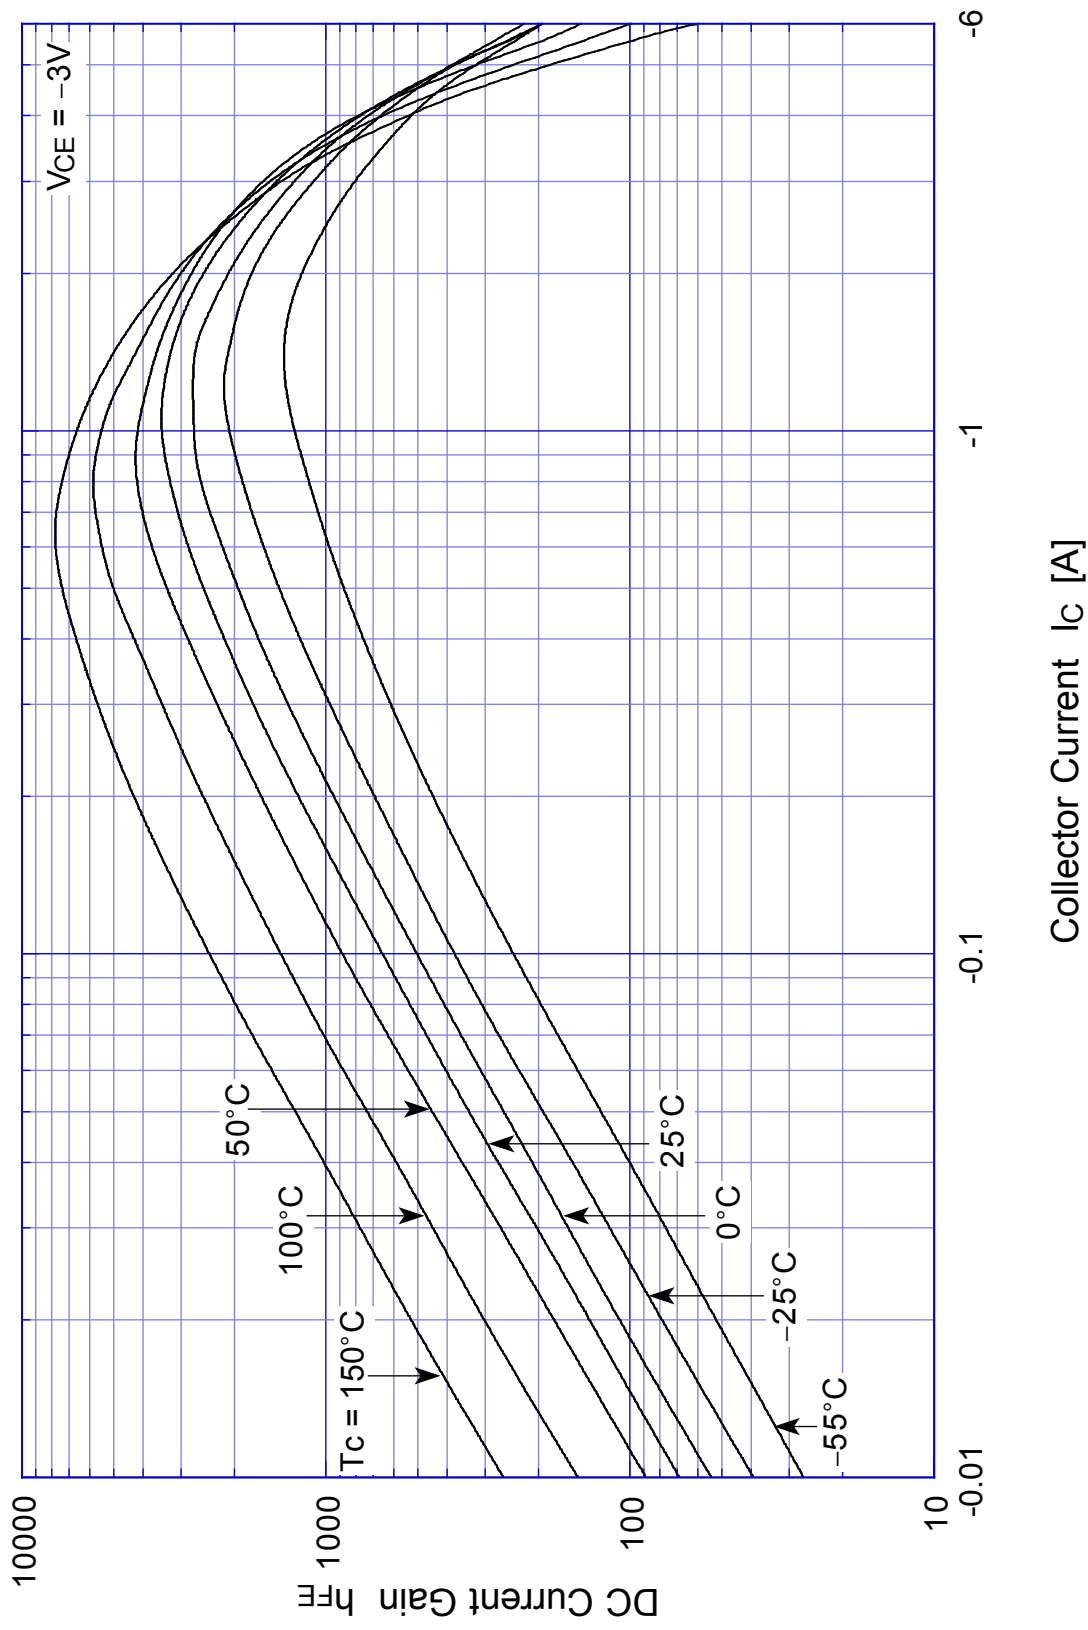


# 2SB1282 Saturation Voltage

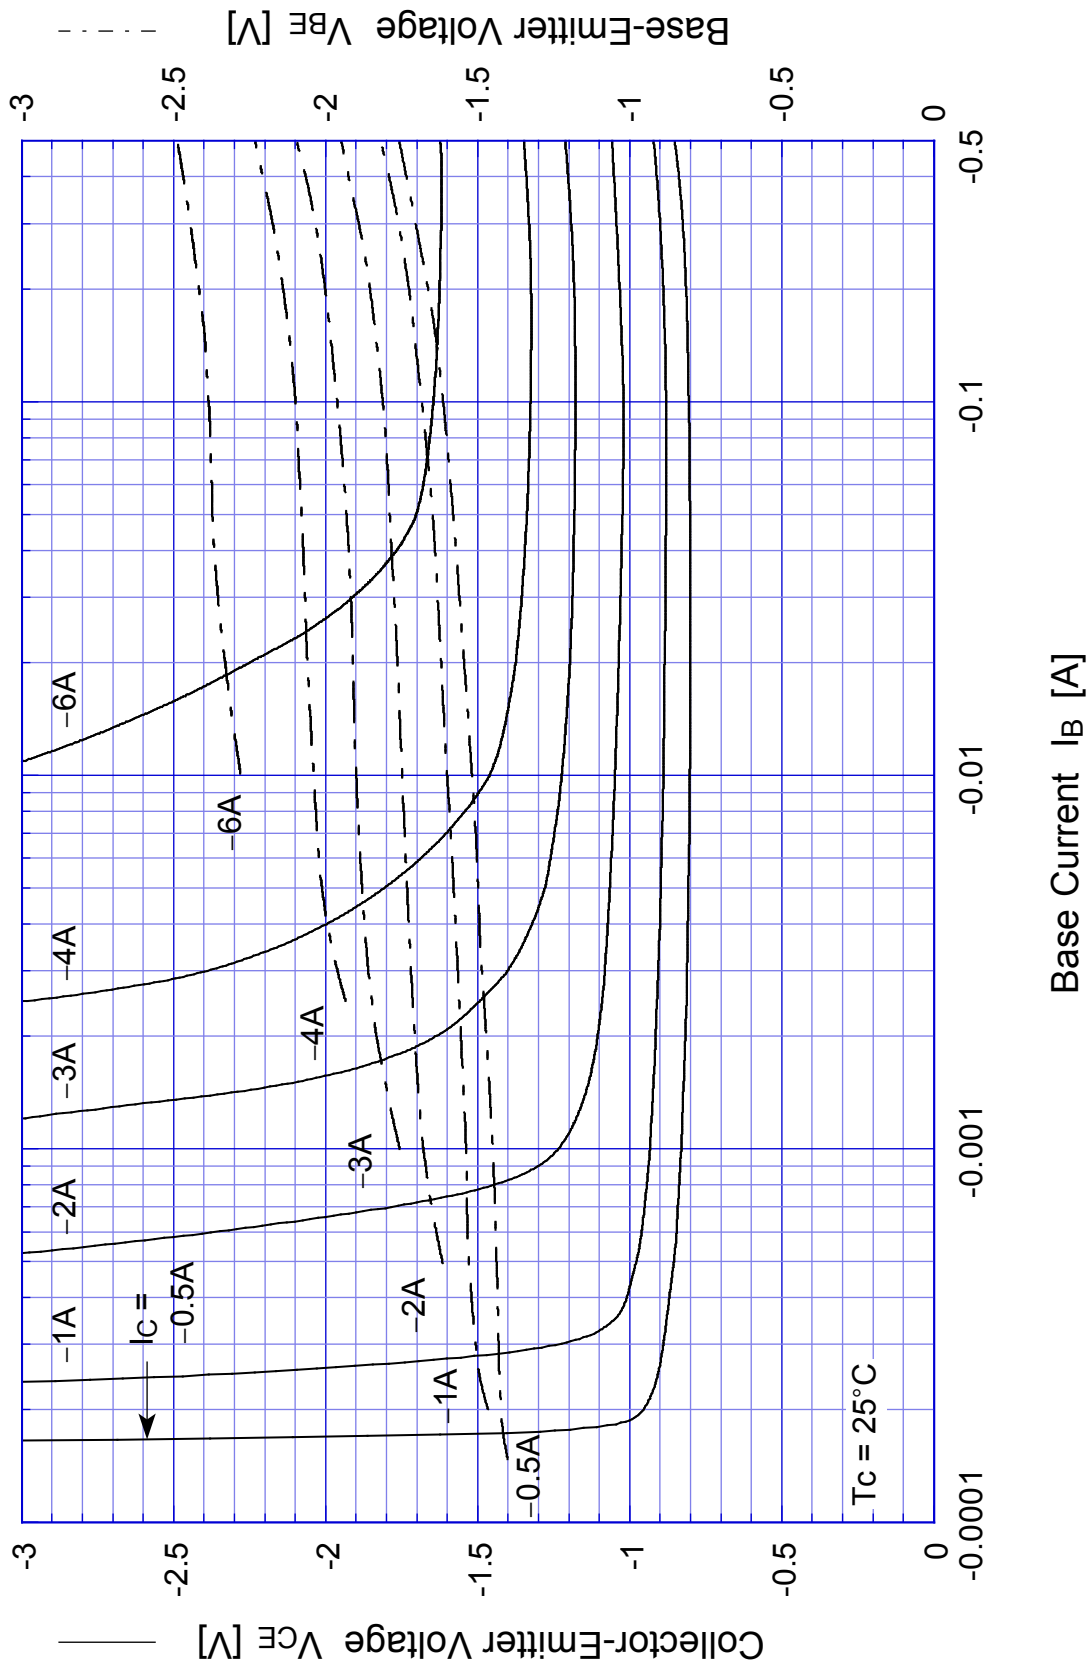


# 2SB1282

## Switching Time - $I_C$

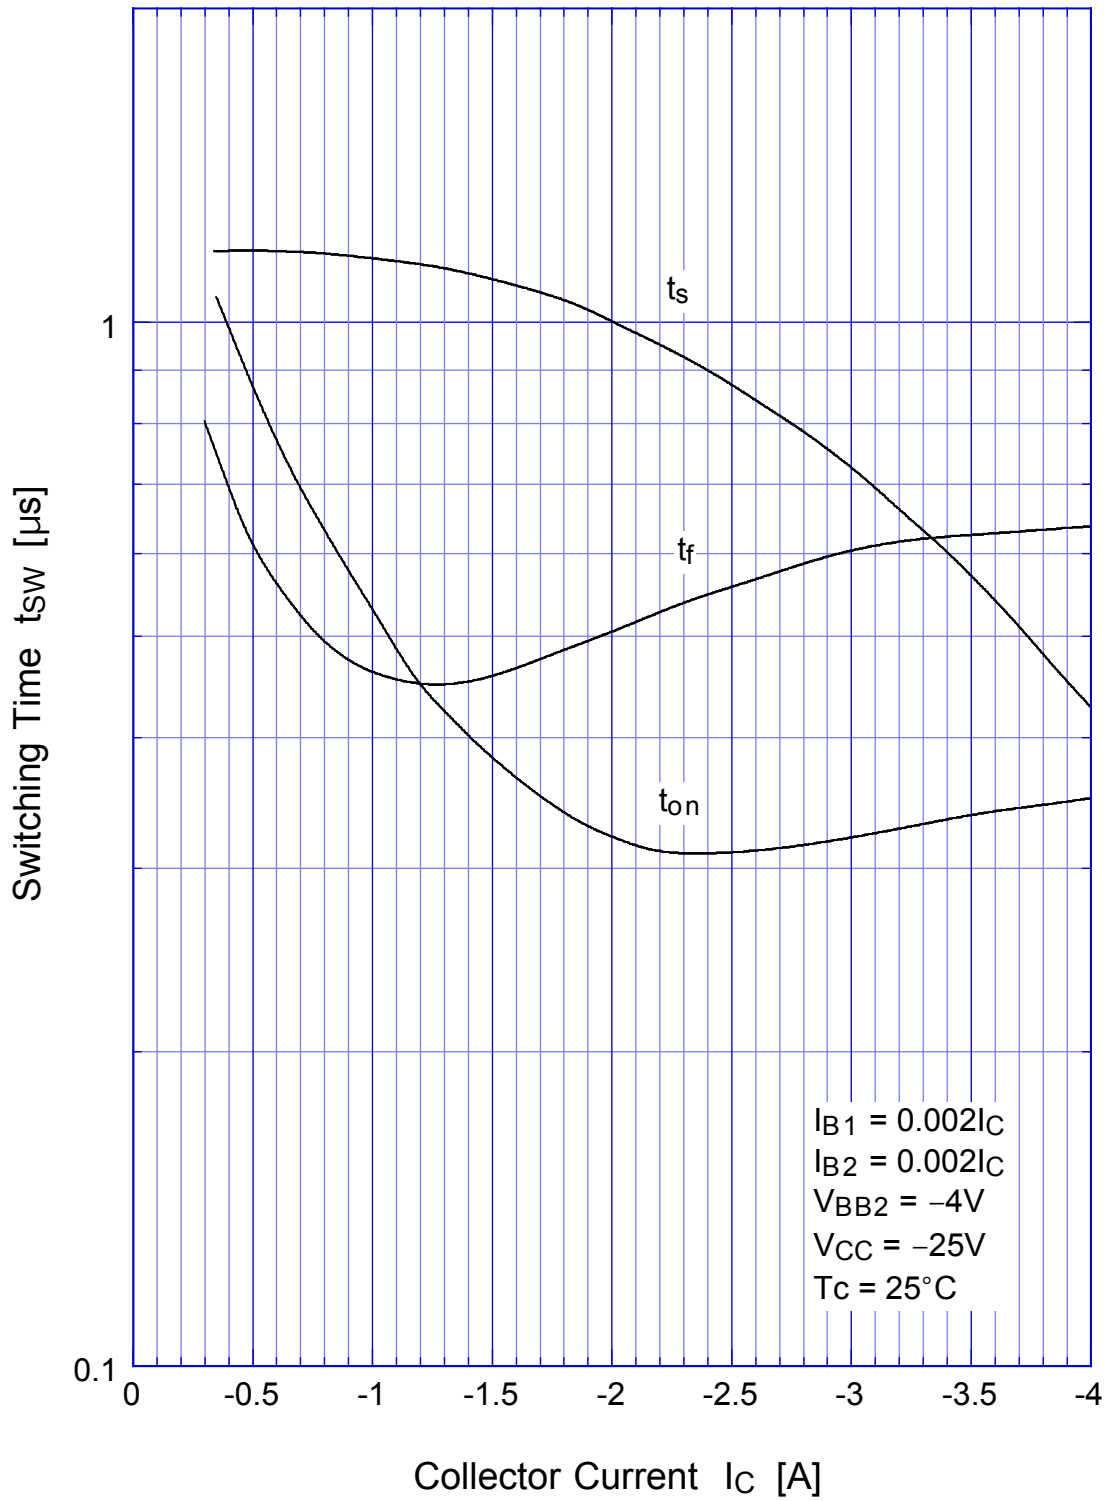


# 2SB1282

## Switching Time - Tc

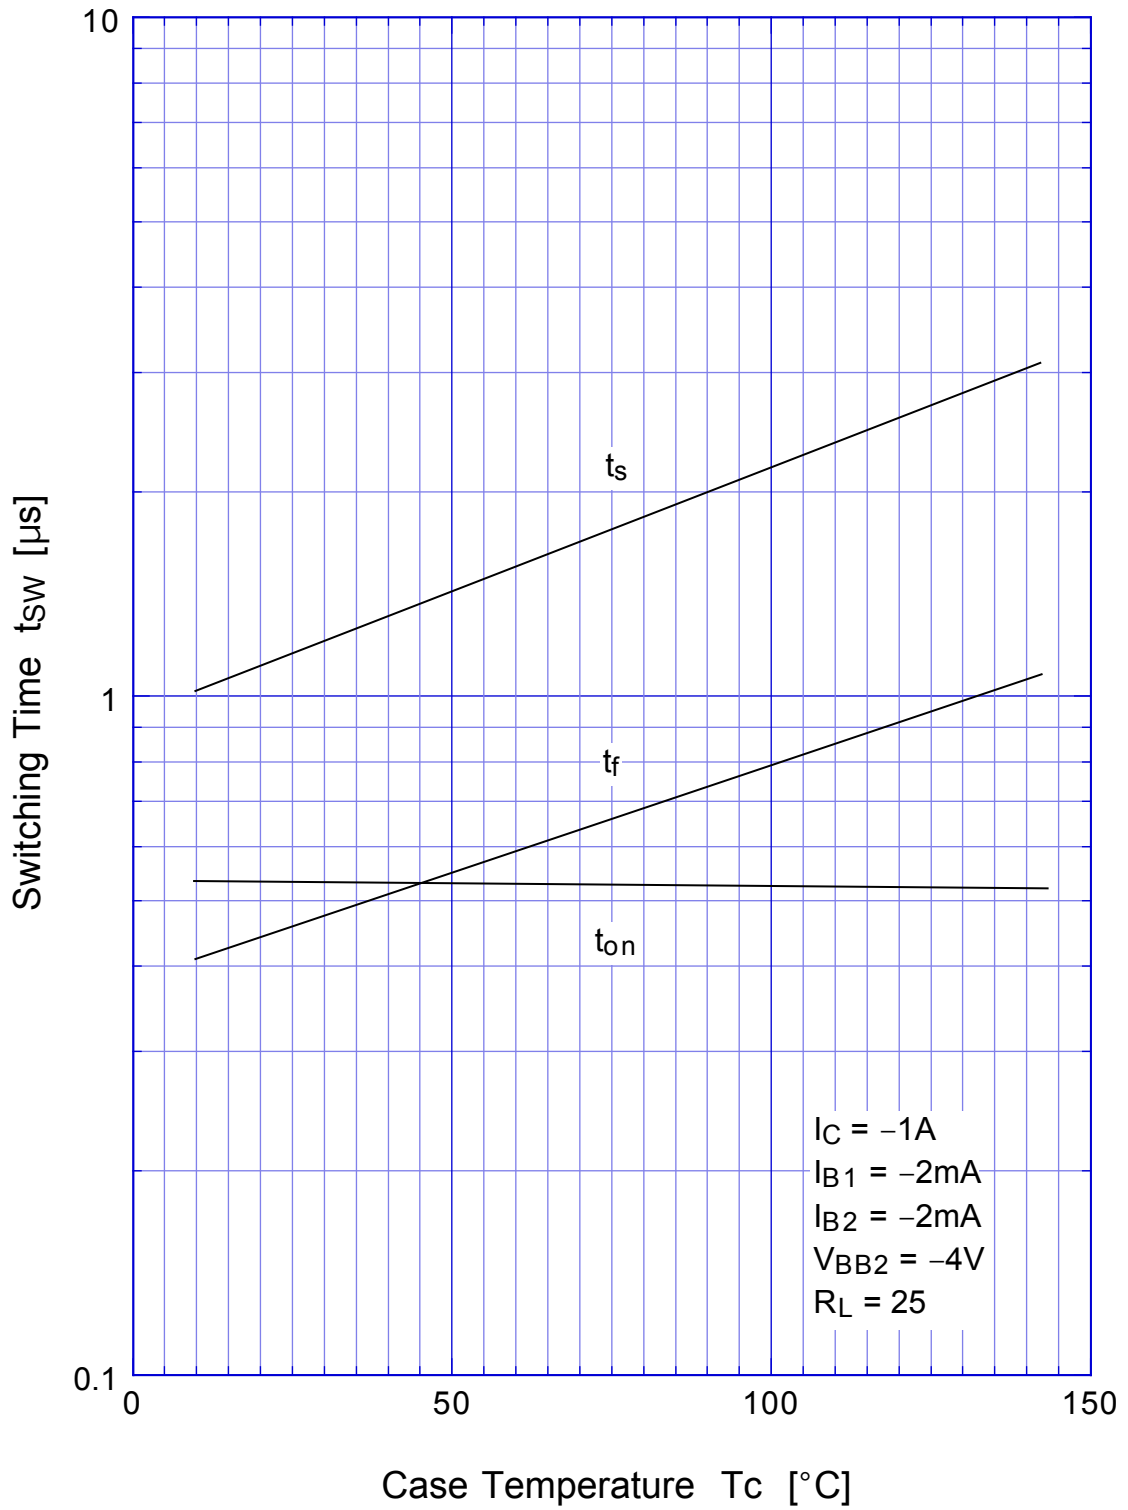


## 2SB1282 Transient Thermal Impedance

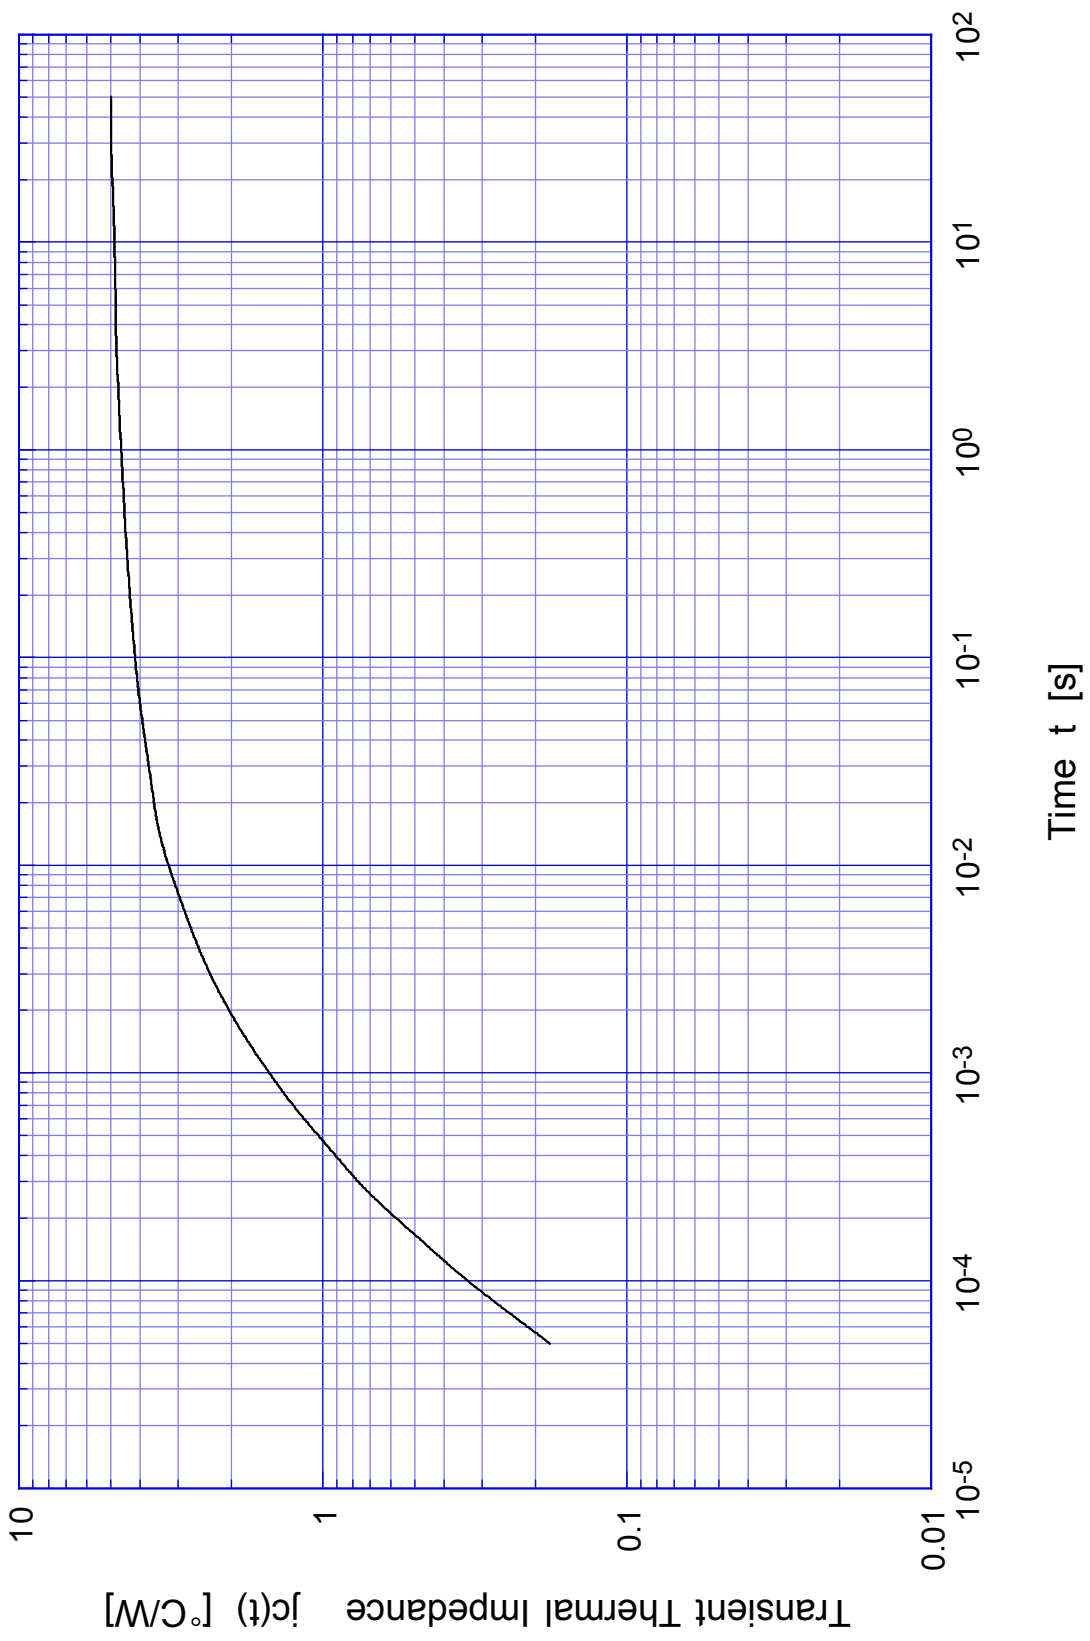

# 2SB1282

# Forward Bias SOA

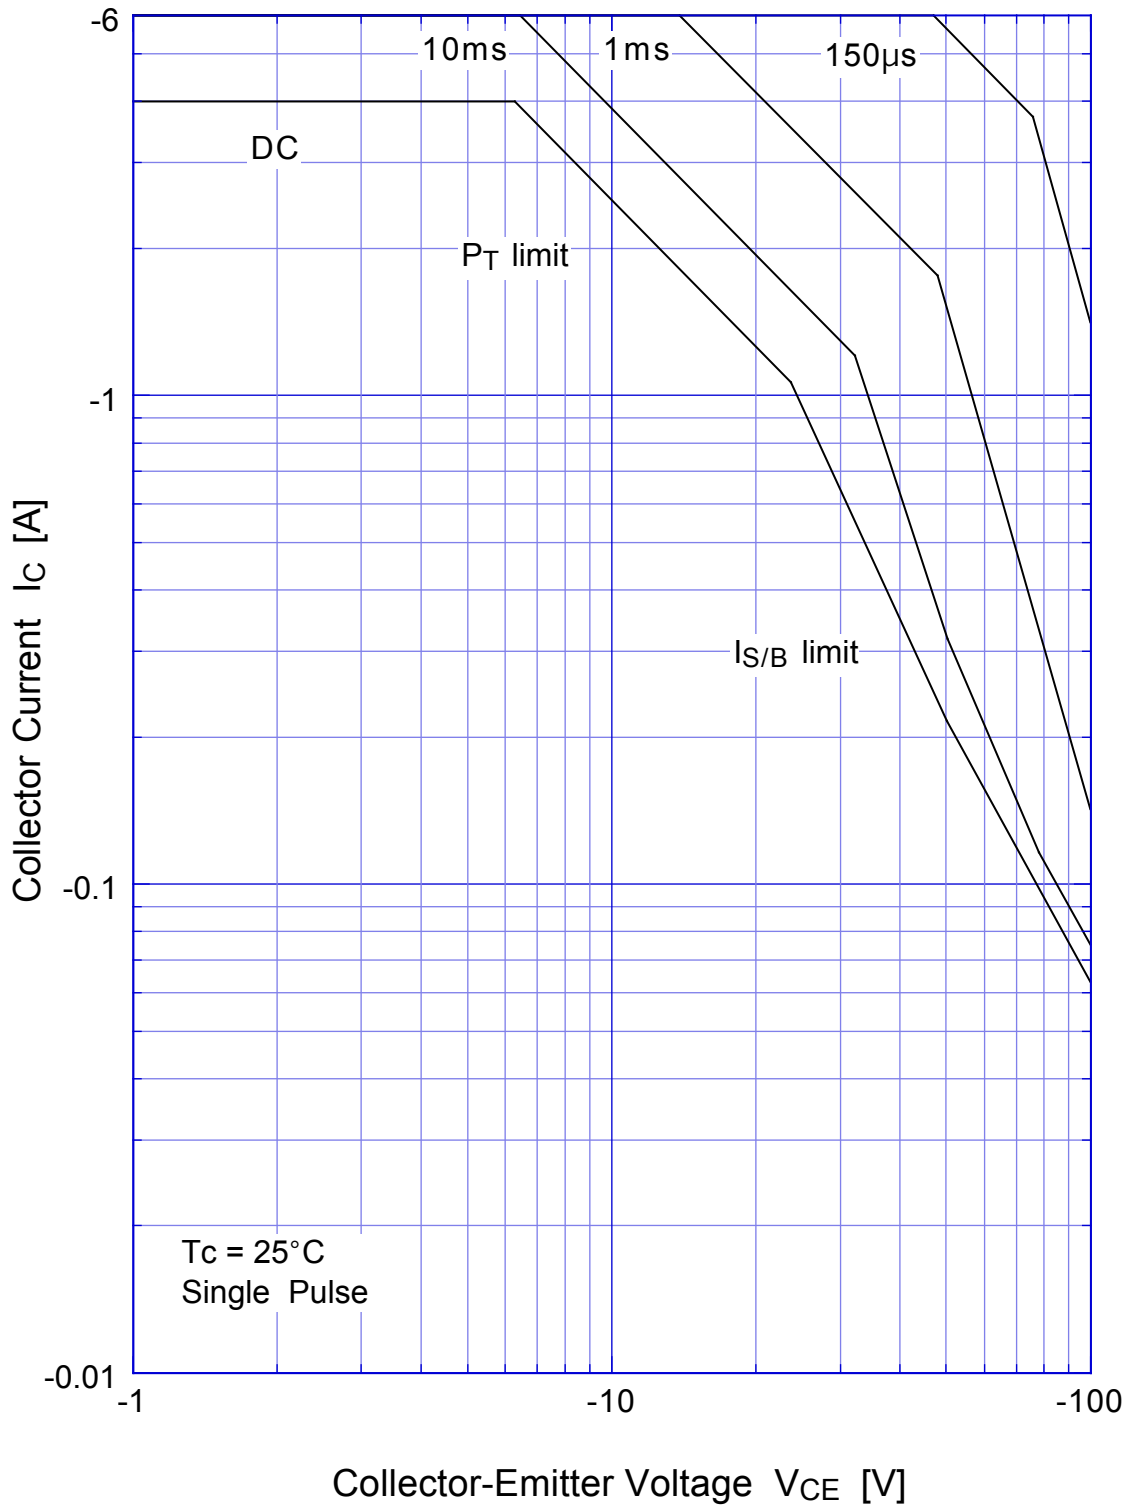

## 2SB1282 Collector Current Derating





2SB1282

Reverse Bias SOA

